



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[01-26544]

Machine Id

MERCUISER OL393568

Component

Port Diesel Engine

Fluid

SIERRA 25W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0019417	---	---
Sample Date		Client Info		12 Apr 2024	---	---
Machine Age	hrs	Client Info		1003	---	---
Oil Age	hrs	Client Info		100	---	---
Filter Age	hrs	Client Info		100	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	16	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>40	1	---	---
Copper	ppm	ASTM D5185(m)	>330	23	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	14	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.3	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		16	---	---
Boron	ppm	ASTM D5185(m)		26	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		10	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		20	---	---
Calcium	ppm	ASTM D5185(m)		2010	---	---
Phosphorus	ppm	ASTM D5185(m)		765	---	---
Zinc	ppm	ASTM D5185(m)		945	---	---
Sulfur	ppm	ASTM D5185(m)		1907	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	9.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		6.44	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		13.2	---	---

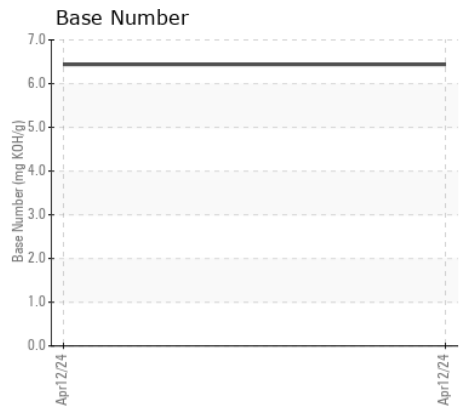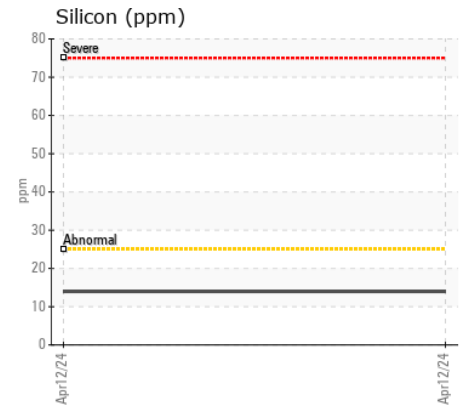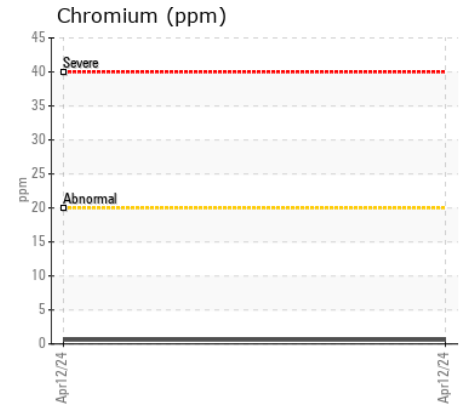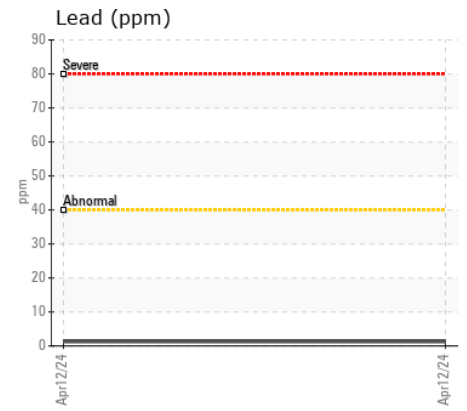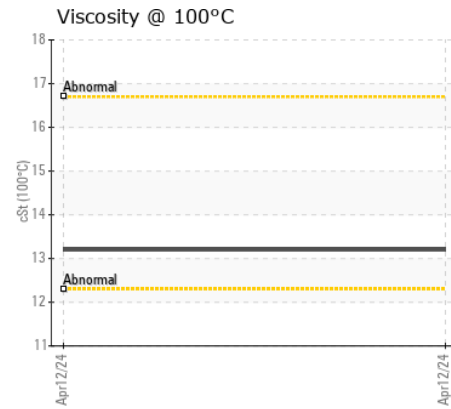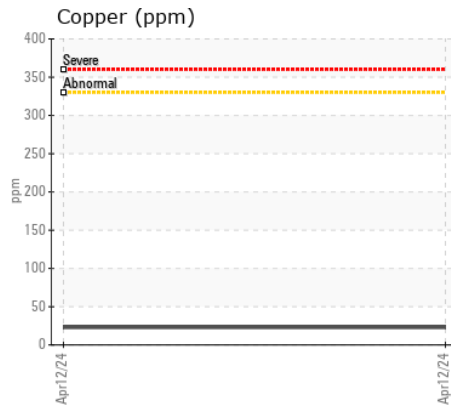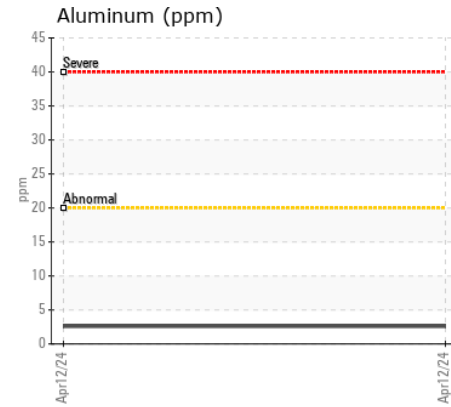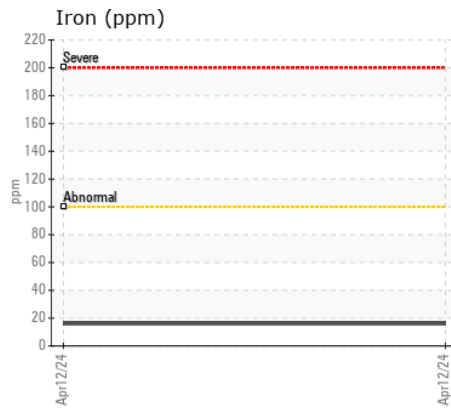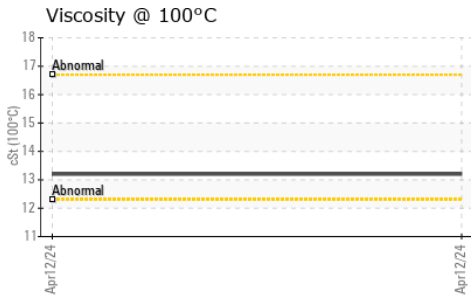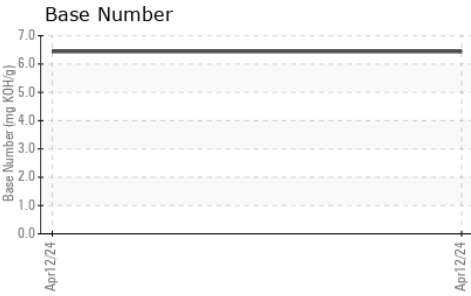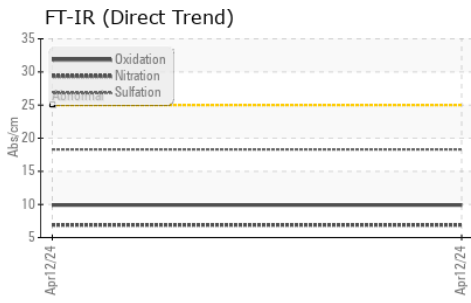

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0019417 **Received** : 18 Apr 2024
Lab Number : 02630040 **Tested** : 19 Apr 2024
Unique Number : 5763172 **Diagnosed** : 19 Apr 2024 - Kevin Marson
Test Package : MOB 2

CHANTIER BLYACHT
 1225 BOUL. CHAMPLAIN
 QUEBEC, QC
 CA G1K 0A2
 Contact: Service Manager
 rboulet@chantierblyacht.com
 T: (514)961-2206
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.