



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR R934C 037803-027
Component
Diesel Engine
Fluid
PETRO CANADA 10W30 (29 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0265734	LH
Sample Date		Client Info		15 Apr 2024	31 Jul 2023	28 Apr 2023
Machine Age	hrs	Client Info		22505	20960	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	6	21	24
Chromium	ppm	ASTM D5185(m)	>5	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		1	62	59
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	2	3
Lead	ppm	ASTM D5185(m)	>30	0	0	<1
Copper	ppm	ASTM D5185(m)	>125	<1	1	2
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	<1	<1

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	4	6	7
Potassium	ppm	ASTM D5185(m)	>20	<1	2	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.6	1.4	2.5
Nitration	Abs/cm	ASTM D7624*	>20	7.5	8.9	11.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.8	23.5	27.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)		4	58	56
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		60	26	29
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		977	621	671
Calcium	ppm	ASTM D5185(m)		1044	1542	1631
Phosphorus	ppm	ASTM D5185(m)		986	1064	1099
Zinc	ppm	ASTM D5185(m)		1186	1177	1224
Sulfur	ppm	ASTM D5185(m)		2504	3198	3003
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.9	15.7	18.2
Visc @ 100°C	cSt	ASTM D7279(m)		11.6	12.4	13.0

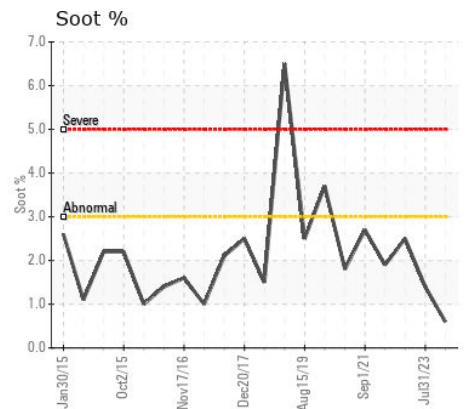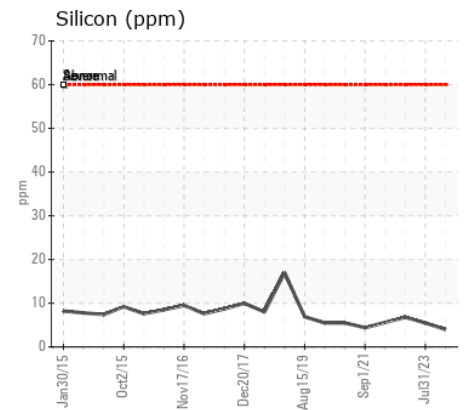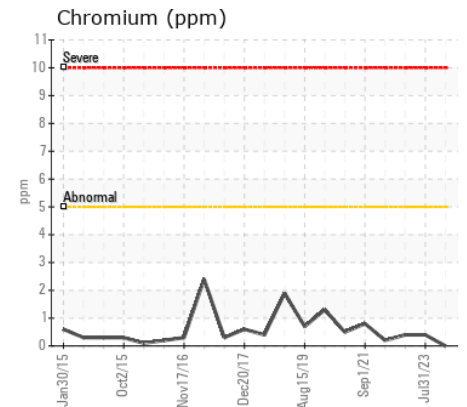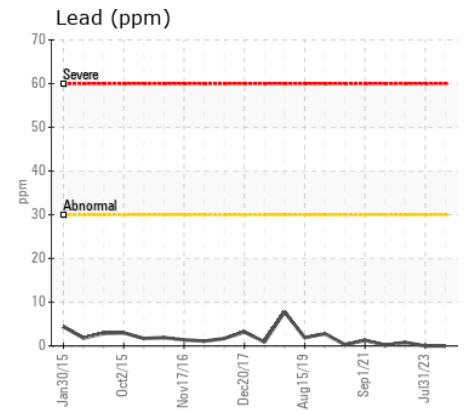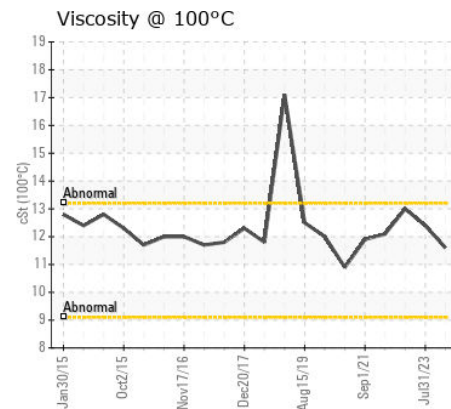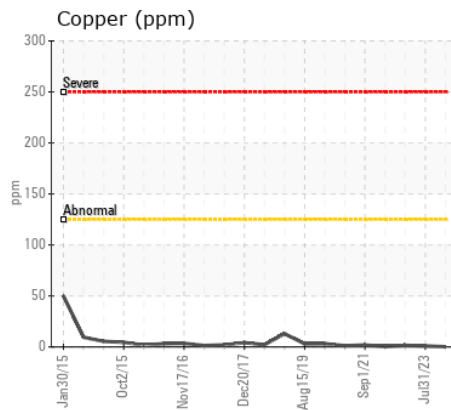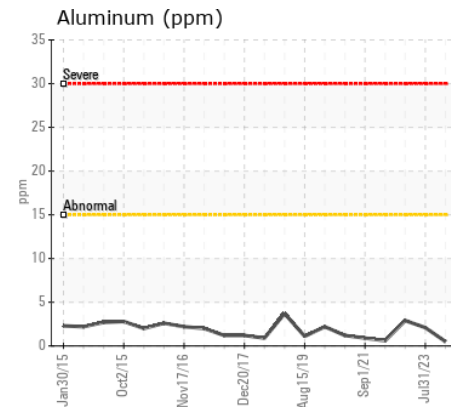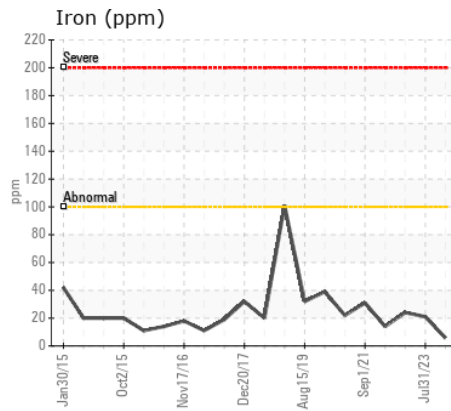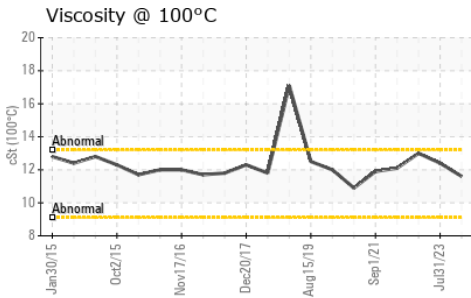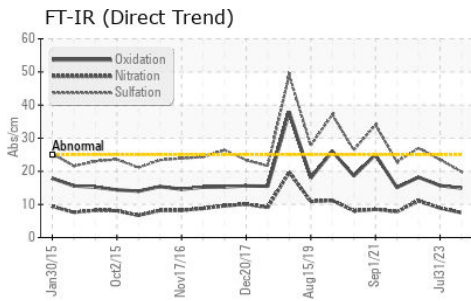

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Received** : 19 Apr 2024
Lab Number : 02630057 **Tested** : 19 Apr 2024
Unique Number : 5763189 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : MOB 1

Urban Mine
 72 Rothwell Rd.
 Winnipeg, MB
 CA R3P 2H7
 Contact: SERVICE

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (204)774-0192
 F: