



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	ABNORMAL



Area
(360382)
Machine Id
LIEBHERR LH60C 119564-1528
Component
Diesel Engine
Fluid
PETRO CANADA 10W40 (44 LTR)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0276279	LH0278912	LH0270566
Sample Date		Client Info		18 Apr 2024	18 Jan 2024	11 Oct 2023
Machine Age	hrs	Client Info		4475	4002	3521
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	4	3	4
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	1	2	1
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>125	1	1	2
Tin	ppm	ASTM D5185(m)	>5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION

Light fuel dilution occurring.


Silicon	ppm	ASTM D5185(m)	>60	5	6	5
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Fuel	%	ASTM D7593*	>5	▲ 2.1	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.6	9.1	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.2	19.0	19.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


Magnesium ppm levels are abnormally high. Calcium ppm levels are abnormally low. Visc @ 100°C is abnormally low. Fuel is present in the oil and is lowering the viscosity.

Sodium	ppm	ASTM D5185(m)	>20	4	1	2
Boron	ppm	ASTM D5185(m)		27	1	1
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		57	58	59
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		▲ 1111	966	989
Calcium	ppm	ASTM D5185(m)		▲ 862	1074	1111
Phosphorus	ppm	ASTM D5185(m)		1000	1026	1008
Zinc	ppm	ASTM D5185(m)		1219	1196	1251
Sulfur	ppm	ASTM D5185(m)		2672	2751	2553
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.6	17.3	17.0
Visc @ 100°C	cSt	ASTM D7279(m)		▲ 11.5	13.1	12.9


▲ Viscosity @ 100°C

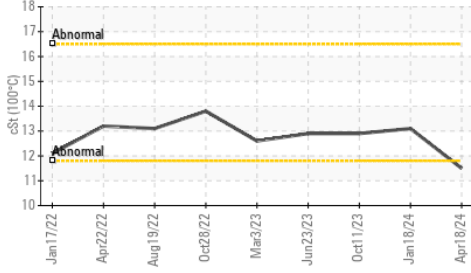


▲ Additives

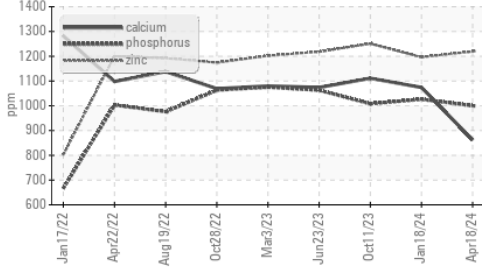


▲ Fuel Dilution

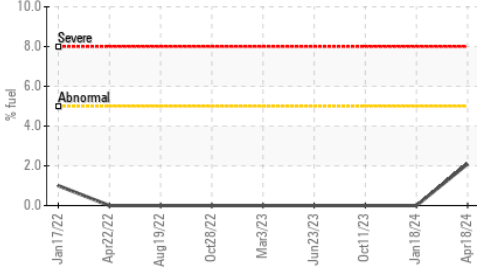


FT-IR (Direct Trend)

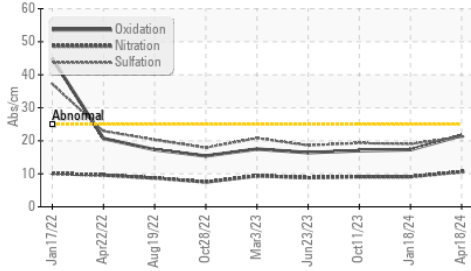


Iron (ppm)

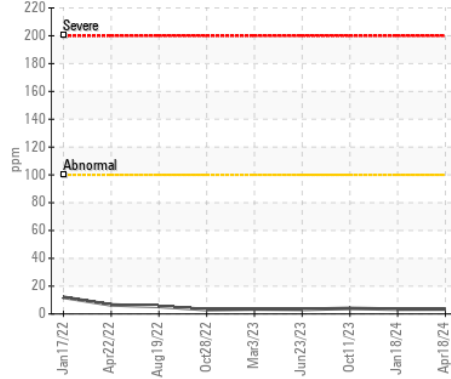


Aluminum (ppm)

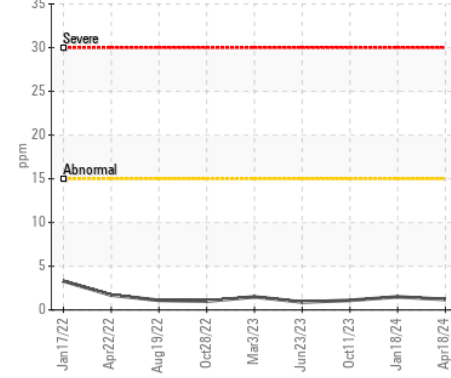


Copper (ppm)

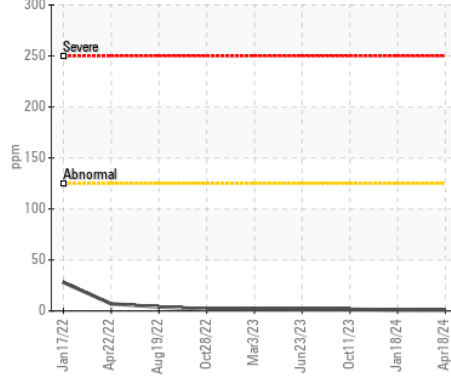


▲ Viscosity @ 100°C

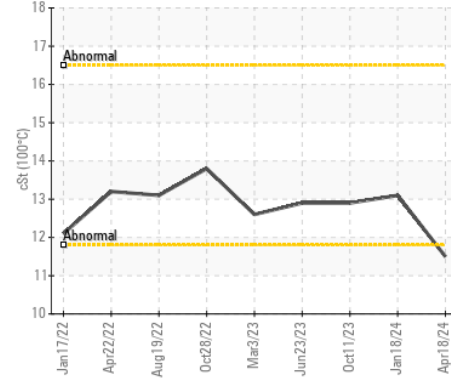


Lead (ppm)

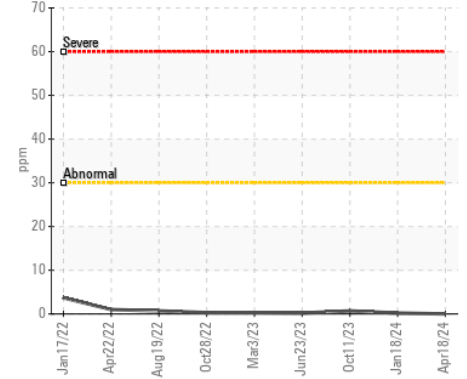


Chromium (ppm)

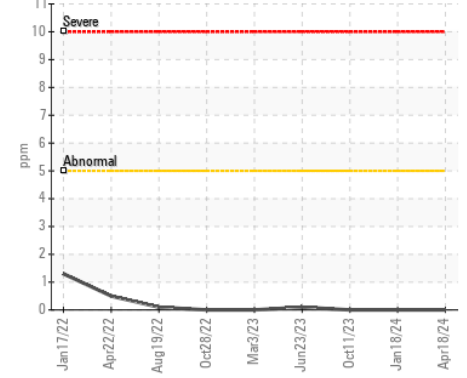

Silicon (ppm)

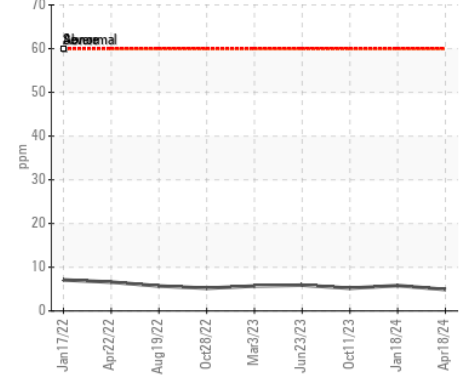

▲ Fuel Dilution

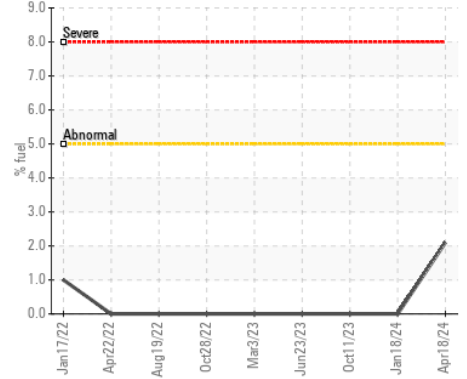

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0276279 **Received** : 19 Apr 2024
Lab Number : 02630077 **Tested** : 22 Apr 2024
Unique Number : 5763209 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GERDAU AMERISTEEL
 3000 COPELAND DR
 CORNWALL, ON
 CA K6H 6P7
 Contact: Ross Cotton
 cotton@gerdauameristeel.com
 T: (613)933-1119
 F: (613)933-6142

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.