



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**425-0000**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0073082</b>	PC0059171	PC0042888
Sample Date		Client Info		<b>18 Apr 2024</b>	05 Apr 2022	09 Sep 2021
Machine Age	hrs	Client Info		<b>4171</b>	1391	855
Oil Age	hrs	Client Info		<b>85</b>	200	0
Filter Age	hrs	Client Info		<b>85</b>	200	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<b>14</b>	6	10
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	3	3
Lead	ppm	ASTM D5185(m)	>40	<b>4</b>	0	0
Copper	ppm	ASTM D5185(m)	>330	<b>4</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>2</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>18</b>	3	4
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.4</b>	7.9	8.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.5</b>	20.8	19.7
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<b>3</b>	<1	1
Boron	ppm	ASTM D5185(m)	250	<b>6</b>	2	3
Barium	ppm	ASTM D5185(m)	10	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>57</b>	60	61
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>946</b>	1042	1075
Calcium	ppm	ASTM D5185(m)	3000	<b>1060</b>	1055	1124
Phosphorus	ppm	ASTM D5185(m)	1150	<b>960</b>	1037	1031
Zinc	ppm	ASTM D5185(m)	1350	<b>1137</b>	1217	1262
Sulfur	ppm	ASTM D5185(m)	4250	<b>2465</b>	2514	2451
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.9</b>	17.1	16.8
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>99.1</b>	108	112
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.8</b>	14.5	14.7
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>140</b>	137	134

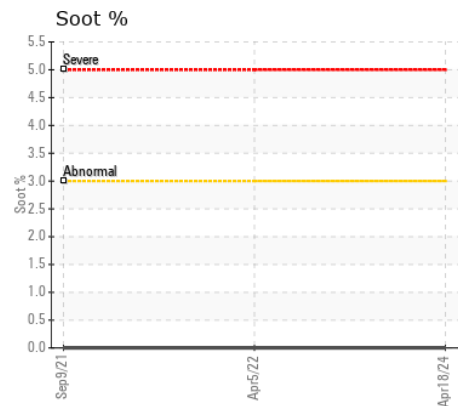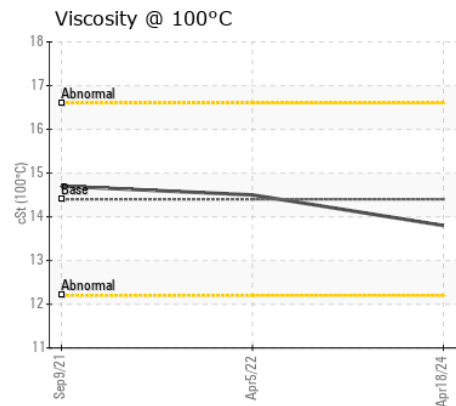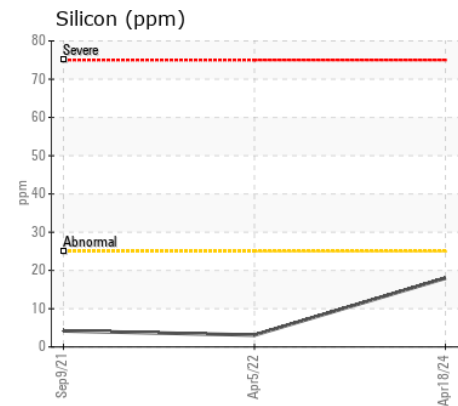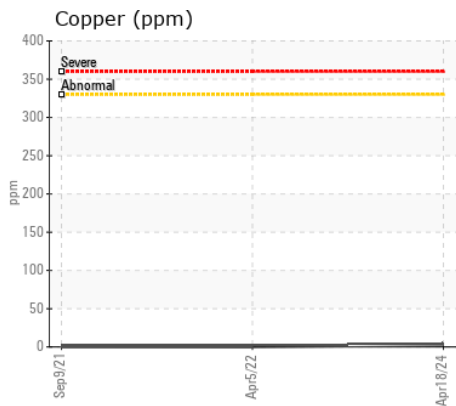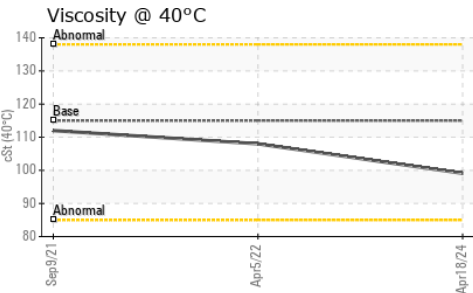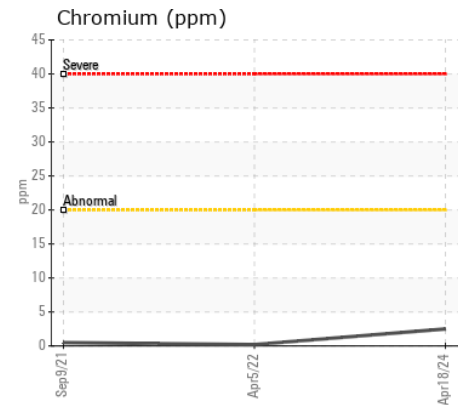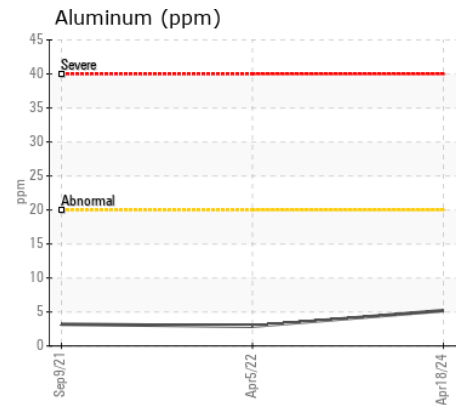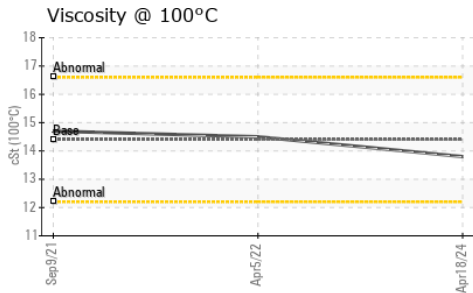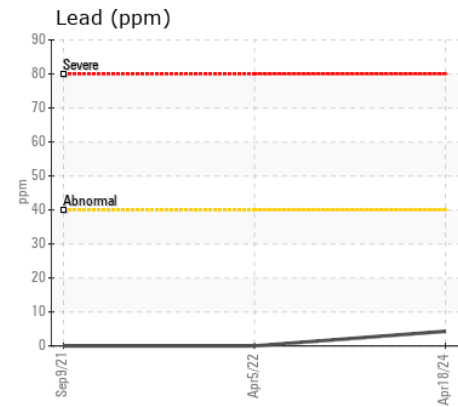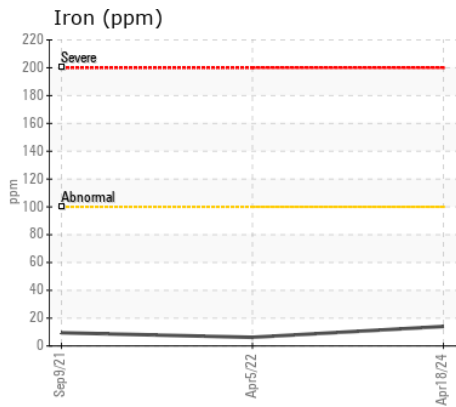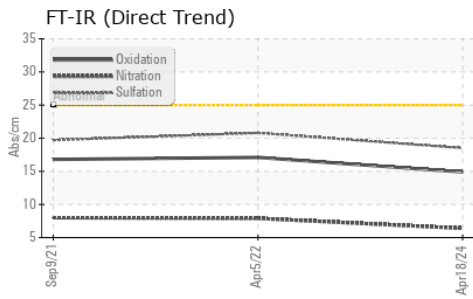

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0073082 **Received** : 19 Apr 2024  
**Lab Number** : 02630113 **Tested** : 19 Apr 2024  
**Unique Number** : 5763245 **Diagnosed** : 22 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**LAVIS CONTRACTING**  
 37462A HURON ROAD  
 CLINTON, ON  
 CA N0M 1L0  
 Contact: Doug Francis  
 dfrancis@lavis.ca  
 T: (519)482-3694  
 F: (519)482-7886

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.