



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**WEST CRANE**

Machine Id  
**170832**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 32 (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PP</b>	PP	PP
Sample Date		Client Info		<b>18 Apr 2024</b>	14 Dec 2023	26 Jun 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>20	<b>7</b>	7	7
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>15	<b>1</b>	3	9
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>0.05	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>690</b>	804	265
Particles >6µm		ASTM D7647	>1300	<b>209</b>	200	81
Particles >14µm		ASTM D7647	>160	<b>18</b>	12	12
Particles >21µm		ASTM D7647	>40	<b>5</b>	3	6
Particles >38µm		ASTM D7647	>10	<b>1</b>	1	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/11</b>	17/15/11	15/14/11
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Boron	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	1	<1
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	25	<b>6</b>	5	5
Calcium	ppm	ASTM D5185(m)	200	<b>64</b>	65	67
Phosphorus	ppm	ASTM D5185(m)	300	<b>231</b>	233	248
Zinc	ppm	ASTM D5185(m)	370	<b>275</b>	279	284
Sulfur	ppm	ASTM D5185(m)	2500	<b>2274</b>	2411	2319
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	<b>0.29</b>	0.33	0.32
Visc @ 40°C	cSt	ASTM D7279(m)	32	<b>34.3</b>	34.5	34.9

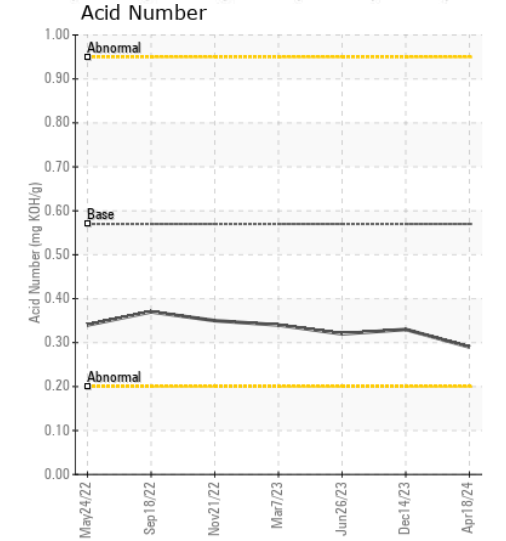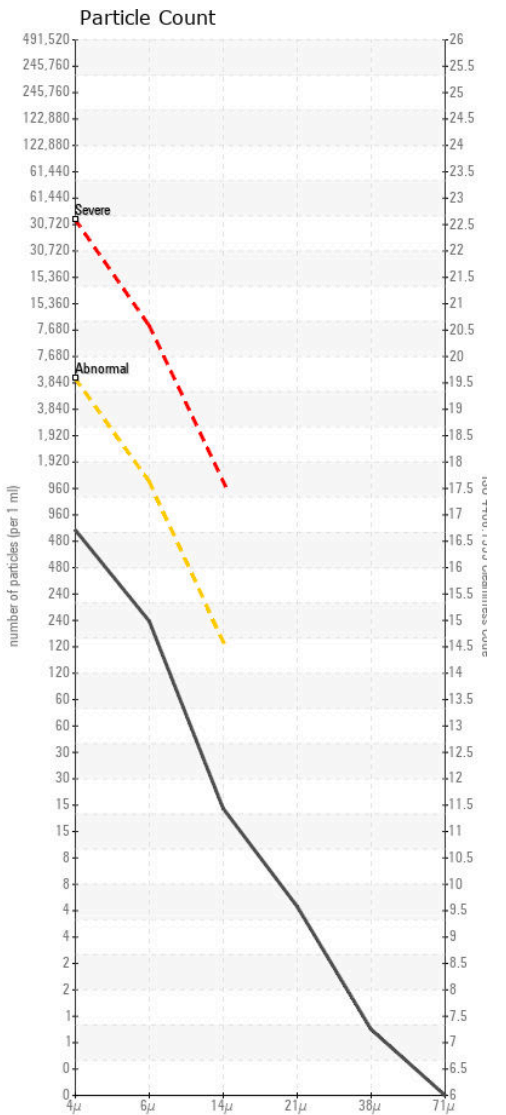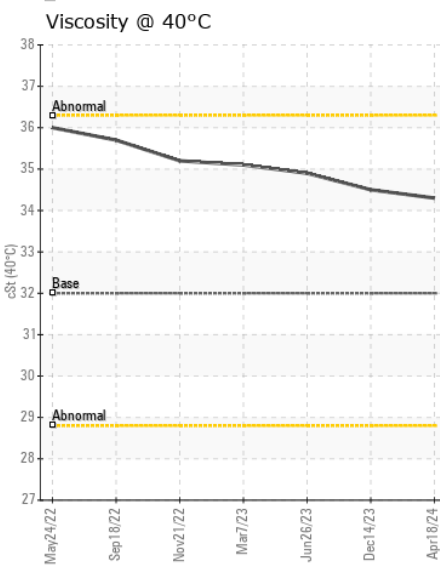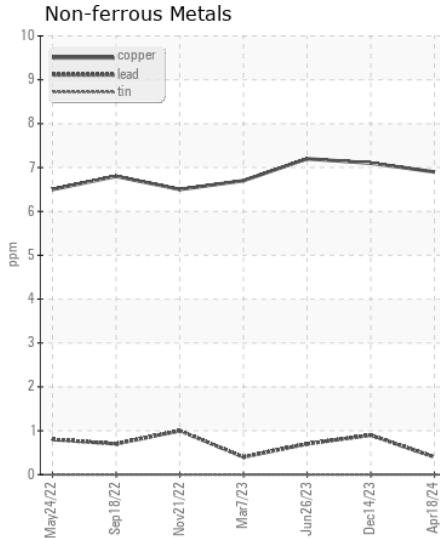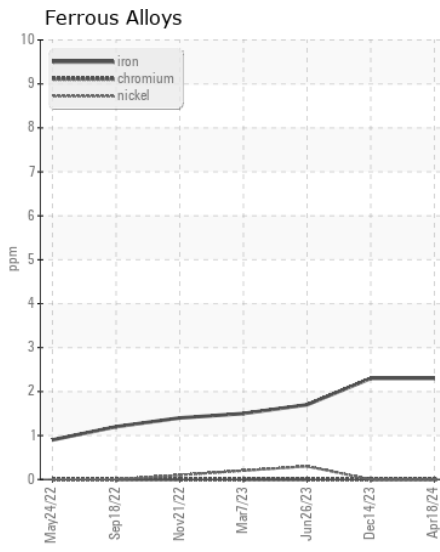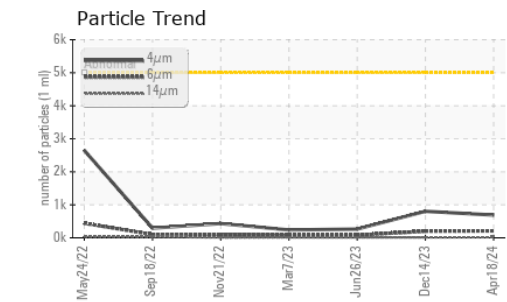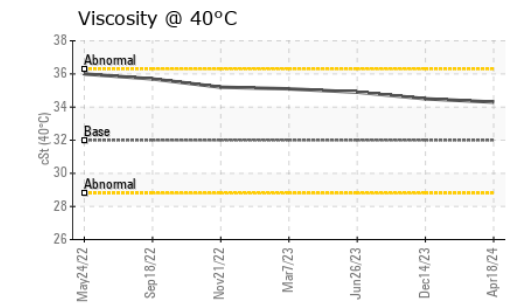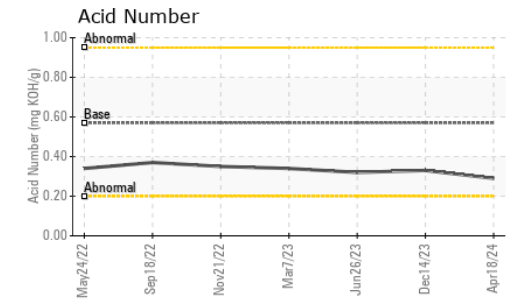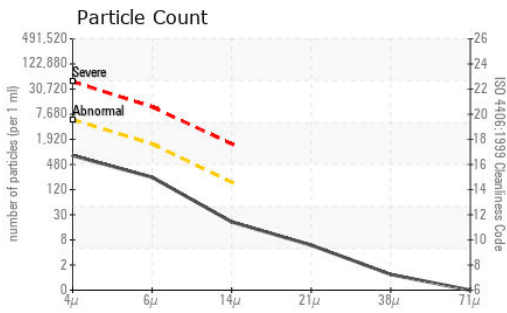

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP  
**Lab Number** : 02630192  
**Unique Number** : 5763324  
**Test Package** : IND 2

**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Wes Davis

**HIBERNIA MGMT & DEVELOPMENT CO. LTD**  
 SUITE 1000,, 100 NEW GOWER STREET  
 ST. JOHNS, NL  
 CA A1C 6K3  
 Contact: Sam Nash  
 samantha.m.nash@exxonmobil.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (709)722-3766