

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL

Machine Id **170831 HB (S/N GH-9142A)** Component Unknown Component

{not provided} (--- GAL)

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

Component wear rates appear to be normal (unconfirmed).


CONTAMINATION

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

FLUID CONDITION

Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP		
Sample Date		Client Info		18 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Filter Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Filter Changed		Client Info		N/A		
Sample Status				NORMAL		
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		6		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		6		
Tin	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)	NONE	0		
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Silicon	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	1-1-	WC Method		NEG		
Particles >4µm		ASTM D7647	>5000	141		
Particles >6µm		ASTM D7647	>1300	41		
Particles >14µm		ASTM D7647	>160	3		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/13/9		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
C a aliu un-				•		
Sodium	ppm	ASTM D5185(m)		0		
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		6		
Calcium	ppm	ASTM D5185(m)		41		
Phosphorus	ppm	ASTM D5185(m)		215		
Zinc	ppm	ASTM D5185(m)		249		
Sulfur	ppm	ASTM D5185(m)		2568		
Acid Number (AN) Visc @ 40°C	mg KOH/g cSt	ASTM D974* ASTM D7279(m)		0.29		
				33.6		

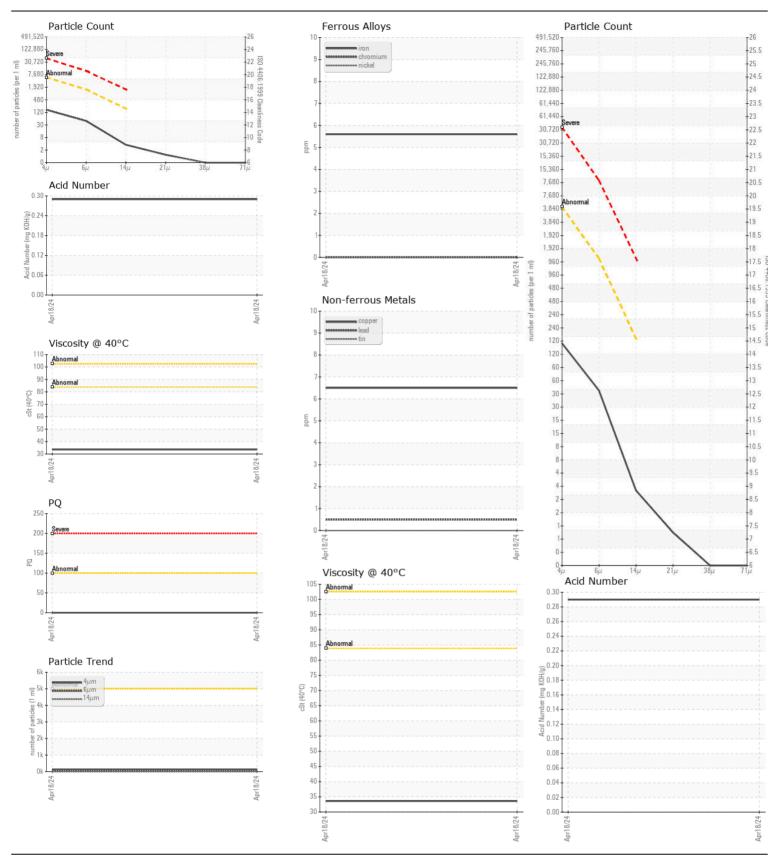

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **HIBERNIA MGMT & DEVELOPMENT CO. LTD** CALA Sample No. : PP SUITE 1000,, 100 NEW GOWER STREET Received : 19 Apr 2024 P Lab Number ST.JOHNS, NL : 02630200 Tested ISO 17025:2017 : 23 Apr 2024 Accredited CA A1C 6K3 Unique Number : 5763332 Diagnosed : 23 Apr 2024 - Kevin Marson Laboratory Test Package : IND 2 (Additional Tests: PQ, PRTCOUNT) Contact: Sam Nash samantha.m.nash@exxonmobil.com To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: F: (709)722-3766 Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Sam Nash - HIBSTJ Page 2 of 2