



Machine Id
733009
Component
Transmission (Auto)
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0025328	GFL0097127	---
Sample Date		Client Info		08 Apr 2024	15 Dec 2023	---
Machine Age	kms	Client Info		17221	12328	---
Oil Age	kms	Client Info		0	0	---
Filter Age	kms	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>220	44	47	---
Chromium	ppm	ASTM D5185(m)	>2	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	0	---
Aluminum	ppm	ASTM D5185(m)	>75	16	13	---
Lead	ppm	ASTM D5185(m)	>95	35	27	---
Copper	ppm	ASTM D5185(m)	>60	18	15	---
Tin	ppm	ASTM D5185(m)	>10	2	2	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>25	8	10	---
Potassium	ppm	ASTM D5185(m)	>20	4	5	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		5	5	---
Boron	ppm	ASTM D5185(m)		46	45	---
Barium	ppm	ASTM D5185(m)		<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		1	1	---
Magnesium	ppm	ASTM D5185(m)		1	1	---
Calcium	ppm	ASTM D5185(m)		128	124	---
Phosphorus	ppm	ASTM D5185(m)		203	205	---
Zinc	ppm	ASTM D5185(m)		19	18	---
Sulfur	ppm	ASTM D5185(m)		1389	1507	---
Visc @ 40°C	cSt	ASTM D7279(m)		32.6	32.9	---

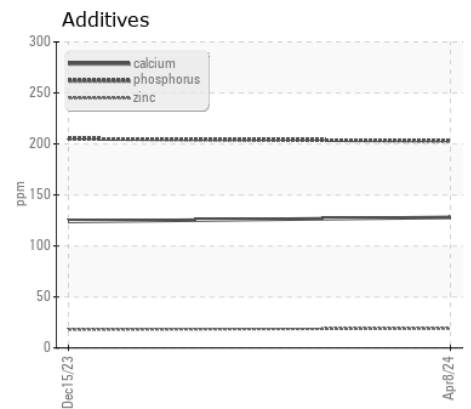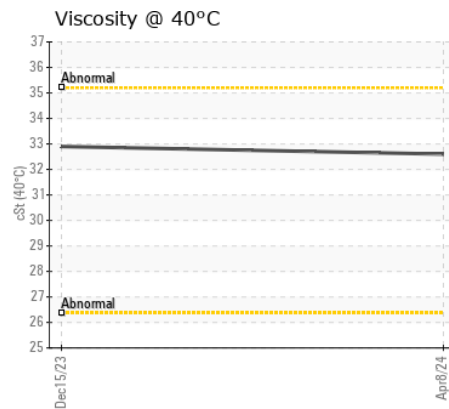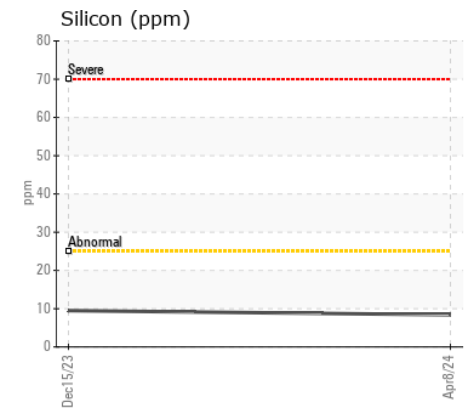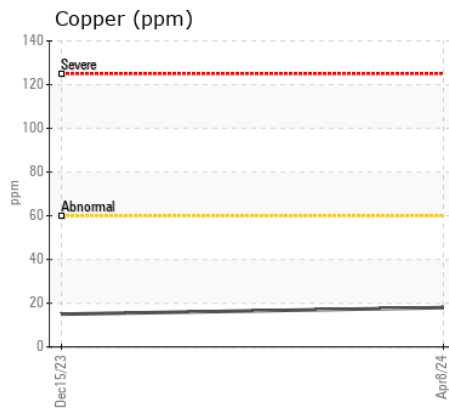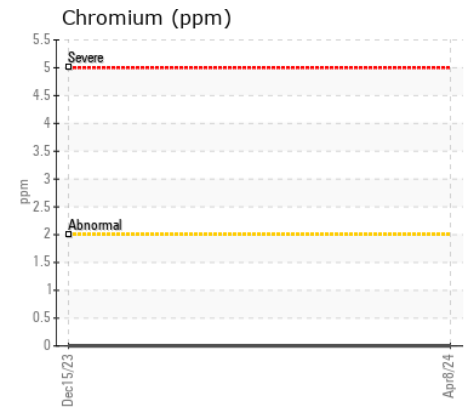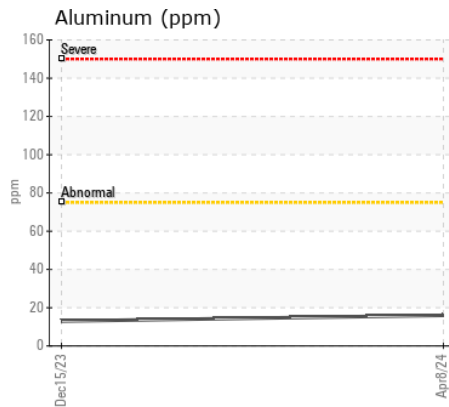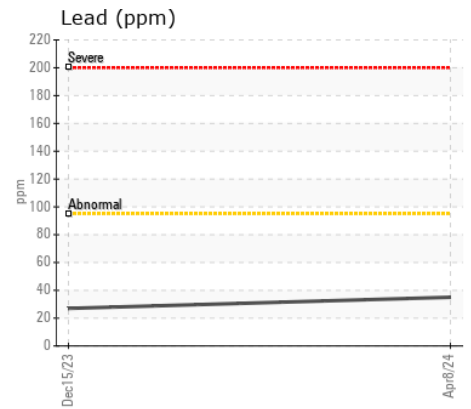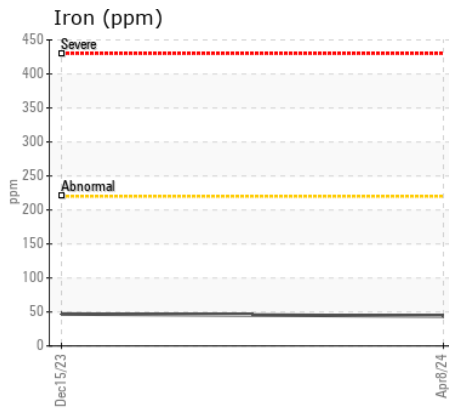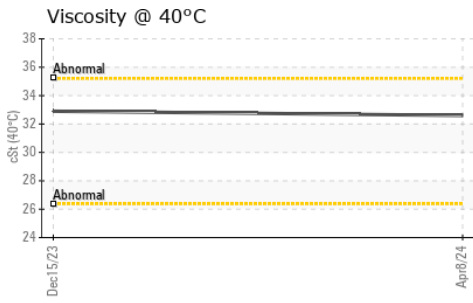

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0025328
Lab Number : 02630295
Unique Number : 5763427
Test Package : MOB 1

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.