



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DOOSAN 225 2310800
 Component
Right Final Drive
 Fluid
PETRO CANADA TRAXON 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084806	PC0071634	PC0043241
Sample Date		Client Info		03 Apr 2024	27 Mar 2023	19 Mar 2021
Machine Age	hrs	Client Info		12997	12421	11531
Oil Age	hrs	Client Info		800	1500	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	145	379	84
Chromium	ppm	ASTM D5185(m)	>10	<1	3	<1
Nickel	ppm	ASTM D5185(m)	>10	<1	3	<1
Titanium	ppm	ASTM D5185(m)		<1	1	<1
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	4	20	4
Lead	ppm	ASTM D5185(m)	>25	0	<1	<1
Copper	ppm	ASTM D5185(m)	>50	9	33	11
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	29	93	25
Potassium	ppm	ASTM D5185(m)	>20	2	0	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	LIGHT	VLITE	LTMOD
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	7	5
Boron	ppm	ASTM D5185(m)	243	240	193	238
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	3	<1
Magnesium	ppm	ASTM D5185(m)	2	6	27	7
Calcium	ppm	ASTM D5185(m)	6	30	109	37
Phosphorus	ppm	ASTM D5185(m)	987	1000	1004	975
Zinc	ppm	ASTM D5185(m)	1	12	25	15
Sulfur	ppm	ASTM D5185(m)	21530	17785	16764	18698
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	135	140	138
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	14.4	14.6	14.7
Viscosity Index (VI)	Scale	ASTM D2270*	108	105	103	106

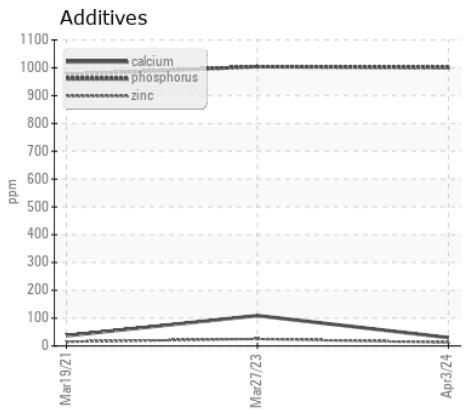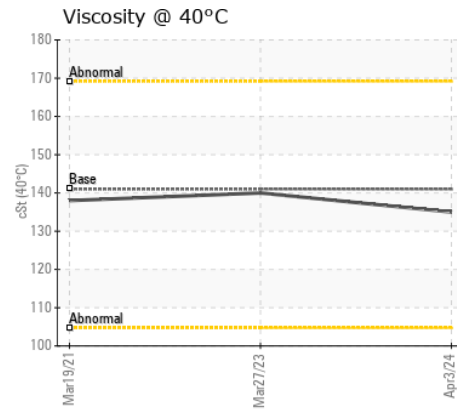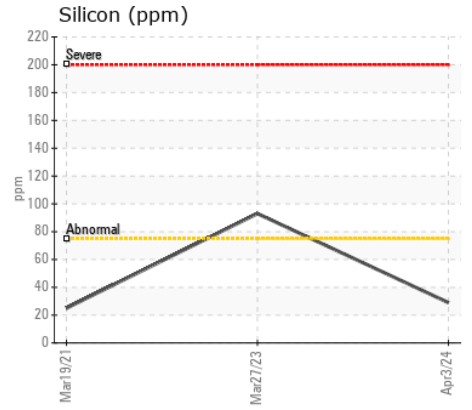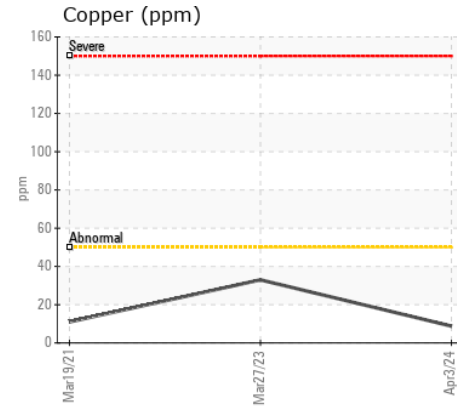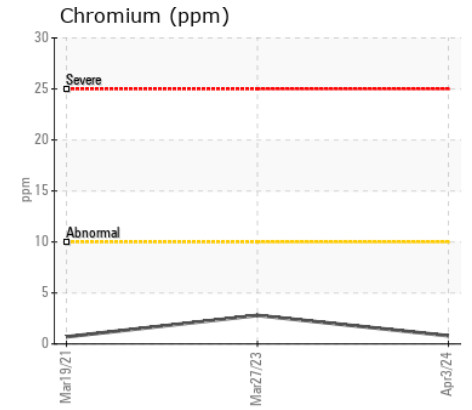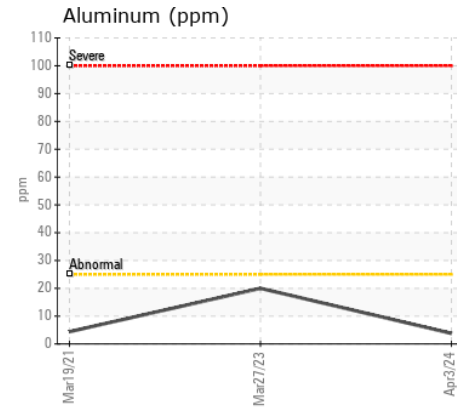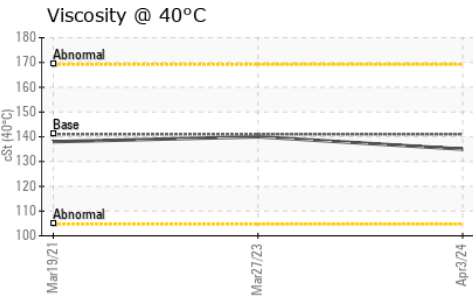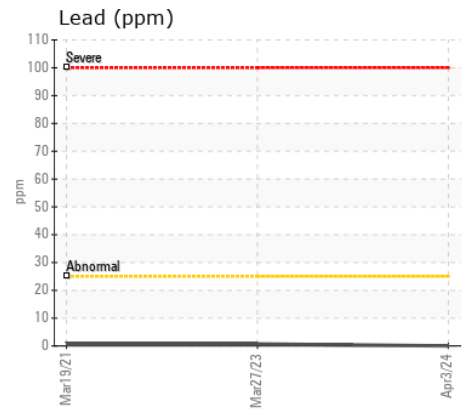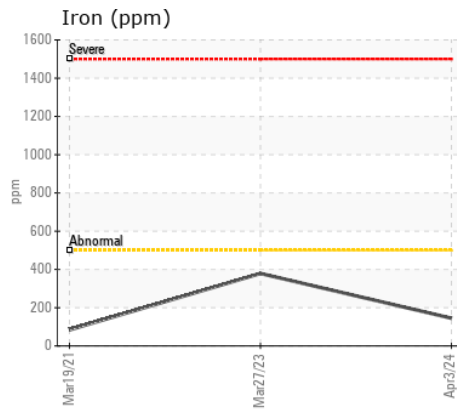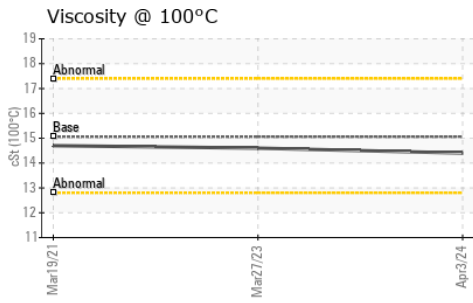

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084806 **Received** : 19 Apr 2024
Lab Number : 02630316 **Tested** : 22 Apr 2024
Unique Number : 5763448 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886