



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area

[413628262]

Machine Id

1000029391 CHAIN HOOKS TRIPE

Component

Gearbox

Fluid

KLUBER KLUBEROIL 4 UH1-460 N (--- GAL)

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

Lithium (Li) level abnormal 66ppm., indicates possible grease contamination.

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0881685	WC0884773	WC0848517
Sample Date		Client Info		11 Apr 2024	16 Jan 2024	18 Oct 2023
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Filter Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
PQ		ASTM D8184*		6	10	10
Iron	ppm	ASTM D5185(m)	>200	18	18	18
Chromium	ppm	ASTM D5185(m)	>15	0	0	0
Nickel	ppm	ASTM D5185(m)	>15	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	0	<1	0
Lead	ppm	ASTM D5185(m)	>100	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>200	12	8	6
Tin	ppm	ASTM D5185(m)	>25	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>50	16	18	19
Potassium	ppm	ASTM D5185(m)	>20	29	28	17
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)		25	25	15
Barium	ppm	ASTM D5185(m)		2	2	2
Molybdenum	ppm	ASTM D5185(m)		13	14	9
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	<1	0
Calcium	ppm	ASTM D5185(m)		33	35	38
Phosphorus	ppm	ASTM D5185(m)		563	595	611
Zinc	ppm	ASTM D5185(m)		18	18	19
Sulfur	ppm	ASTM D5185(m)		770	808	796
Acid Number (AN)	mg KOH/g	ASTM D974*		0.45	0.53	0.61
Visc @ 40°C	cSt	ASTM D7279(m)	460	441	432	426

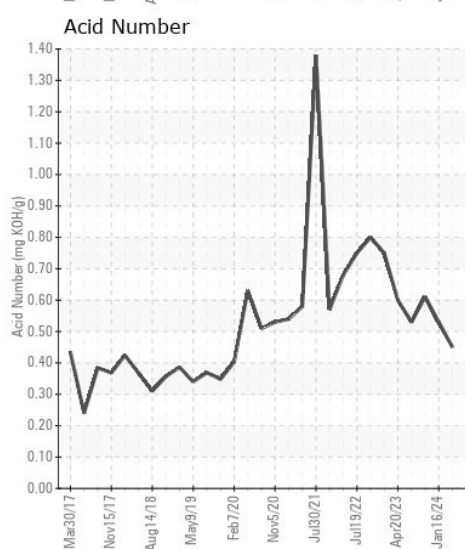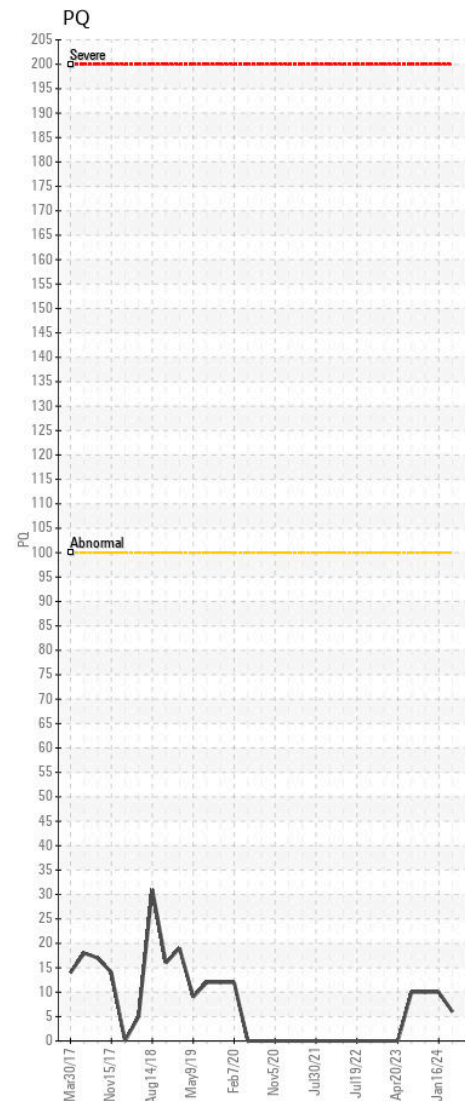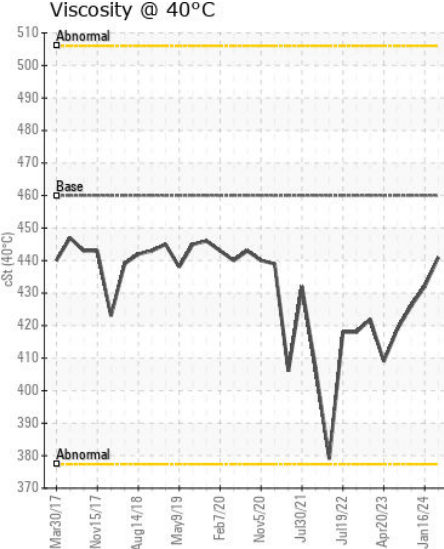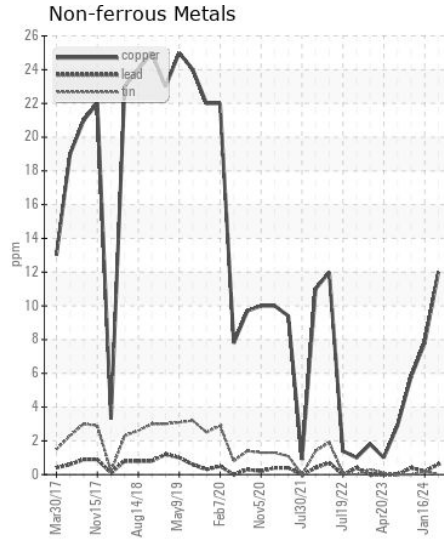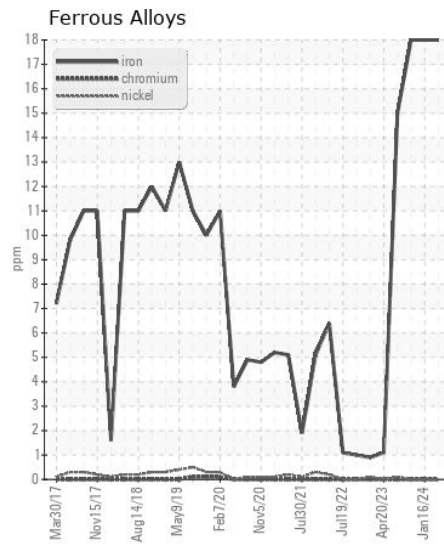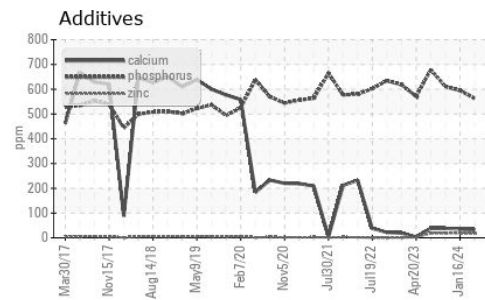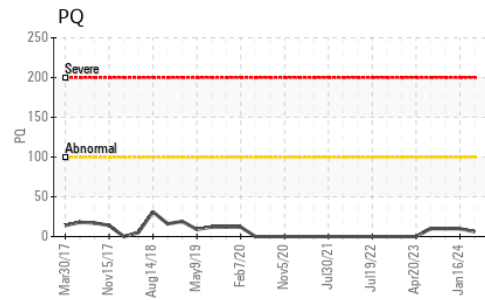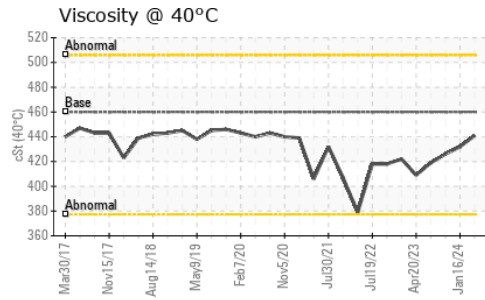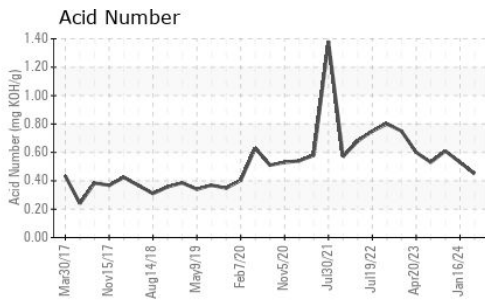

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0881685 **Received** : 19 Apr 2024
Lab Number : **02630397** **Tested** : 23 Apr 2024
Unique Number : 5763529 **Diagnosed** : 23 Apr 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: TAN Man)

Cargill Meat Solutions
 165 Dunlop Drive
 Guelph, ON
 CA N1L 1P4
 Contact: Jakub Posluszny
 jakub_posluszny@cargill.com
 T: (519)823-5200
 F: (519)823-5893

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.