



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	NORMAL

Machine Id
22127 STBD. MAIN ENGINE (S/N 3111)
 Component
Starboard Main Engine
 Fluid
PETRO CANADA DURON MARINE SAE 30 (755 LTR)

RECOMMENDATION




Confirm the source of the lubricant being utilized for top-up/fill.
 Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0867270	WC0905533	WC0635255
Sample Date		Client Info		09 Apr 2024	10 Mar 2024	05 Mar 2022
Machine Age	hrs	Client Info		0	0	93490
Oil Age	hrs	Client Info		1000	500	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

PQ		ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m)	>75	8	6	4
Chromium	ppm	ASTM D5185(m)	>8	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)	>3	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>18	0	0	<1
Copper	ppm	ASTM D5185(m)	>80	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>14	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Large Particles		DR-Ferr*		9.2	8.8	11.1
Small Particles		DR-Ferr*		6.9	5.6	4.6
Total Particles		DR-Ferr*	>---	16.1	14.4	15.7
Large Particles Percentage	%	DR-Ferr*		14.3	22.2	41.4
Severity Index		DR-Ferr*		21	28	72
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2	2	2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

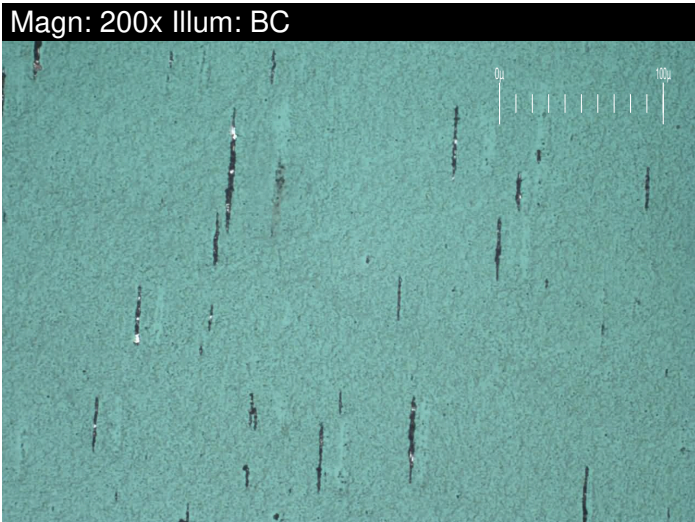

CONTAMINANTS

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>20	2	4	4
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*		0.6	0.4	0.1
Nitration	Abs/cm	ASTM D7624*	>20	5.0	4.5	5.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	15.2	14.2	15.9
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

OIL CONDITION


Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>75	1	1	1
Boron	ppm	ASTM D5185(m)	1.0	4	3	3
Barium	ppm	ASTM D5185(m)	1.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	1.0	<1	0	5
Manganese	ppm	ASTM D5185(m)	1	0	0	<1
Magnesium	ppm	ASTM D5185(m)	15	1007	992	993
Calcium	ppm	ASTM D5185(m)	2540	1107	1072	1240
Phosphorus	ppm	ASTM D5185(m)	1000	1132	1127	1185
Zinc	ppm	ASTM D5185(m)	1110	1302	1291	1324
Sulfur	ppm	ASTM D5185(m)	3700	2495	2600	2841
Oxidation	Abs/.1mm	ASTM D7414*	>25	7.6	7.1	8.0
Base Number (BN)	mg KOH/g	ASTM D2896*	7.9	8.99	9.05	9.09
Visc @ 100°C	cSt	ASTM D7279(m)	11.2	11.1	10.9	11.2
Lubricant Degradation	Scale 0-10	ASTM D7684*				


Ferrous Alloys

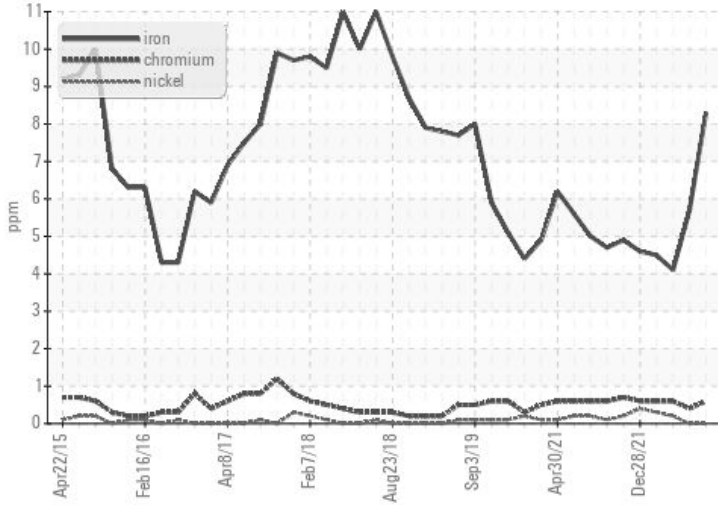


Non-ferrous Metals

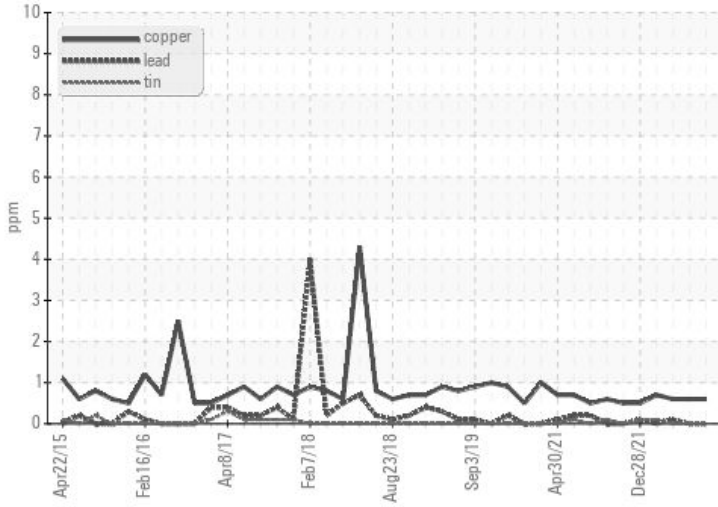


Viscosity @ 100°C

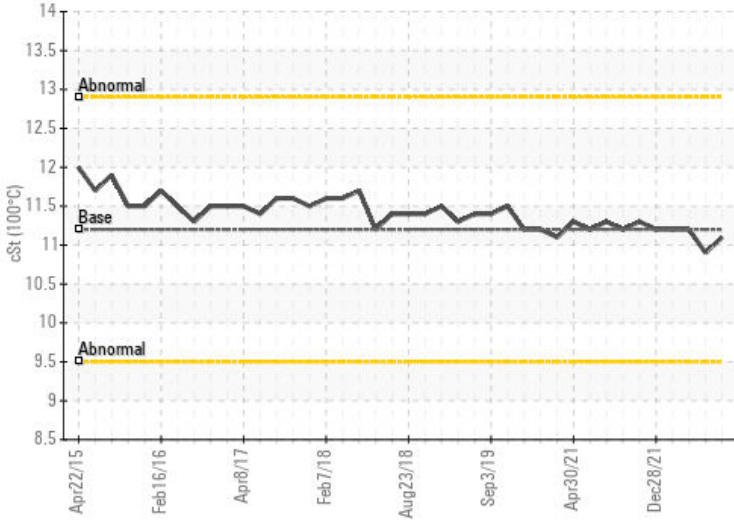

PQ

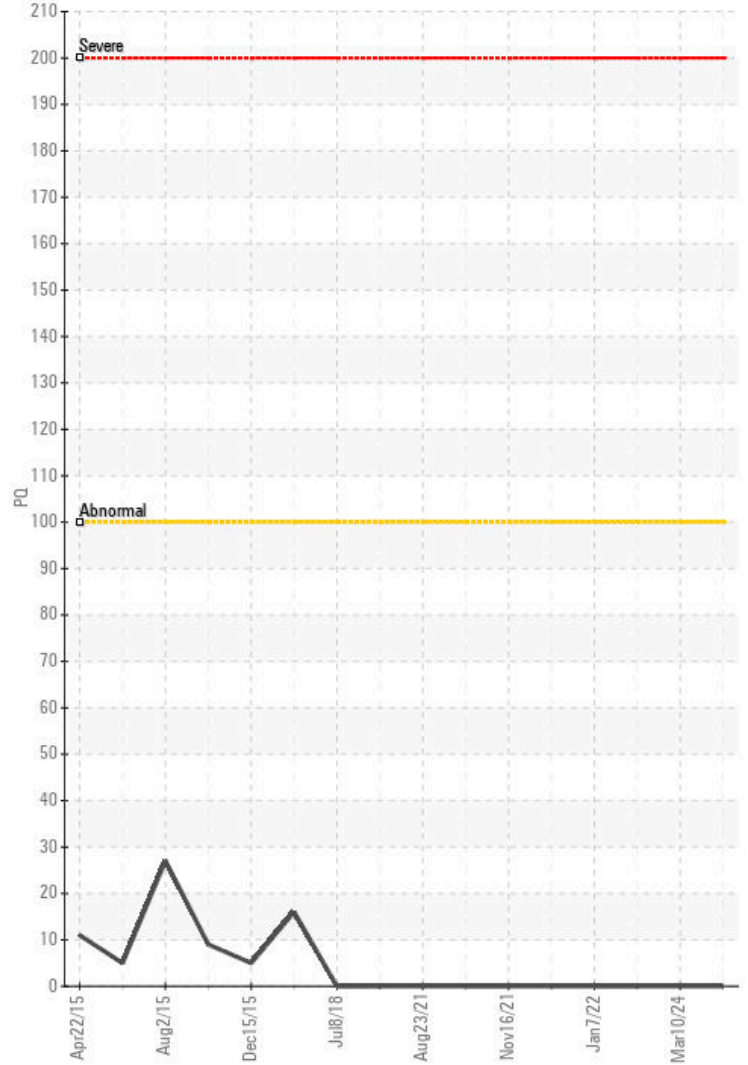

Base Number

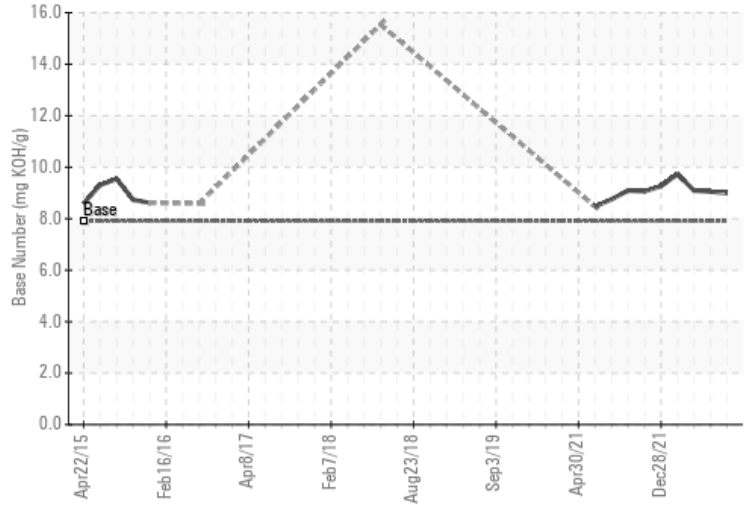

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0867270
Lab Number : 02630435
Unique Number : 5763567
Test Package : MAR 3

CCGS Cygnus - Fleet Tech Stores
 280 Southside Road., P.O. BOX 5667
 ST. JOHN'S, NL
 CA A1C 5X1
 Contact: Chief Engineer
 CygnusCE@CYG.ccgcs-ngcc.gc.ca
 T: x:
 F: (709)772-3652

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank