



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area
[2008506]
 Machine Id
T247
 Component
Diesel Engine
 Fluid
SAE 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033503	---	---
Sample Date		Client Info		18 Apr 2024	---	---
Machine Age	kms	Client Info		245516	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	11	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Fuel	%	ASTM D7593*	>3.0	0.8	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.3	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION


Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	2	---	---
Boron	ppm	ASTM D5185(m)		6	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		17	---	---
Calcium	ppm	ASTM D5185(m)		2197	---	---
Phosphorus	ppm	ASTM D5185(m)		808	---	---
Zinc	ppm	ASTM D5185(m)		977	---	---
Sulfur	ppm	ASTM D5185(m)		2766	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	11.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	▲ 12.1	---	---


▲ Viscosity @ 100°C




Iron (ppm)

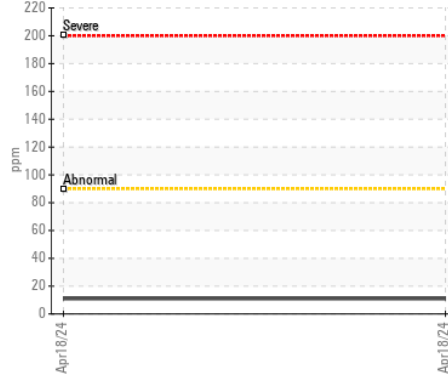


Lead (ppm)

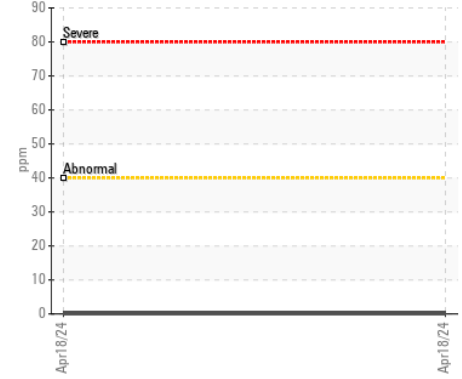


Fuel Dilution

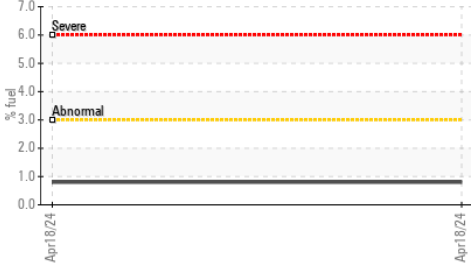


Aluminum (ppm)

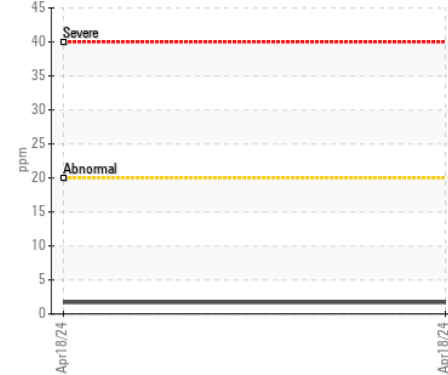


Chromium (ppm)

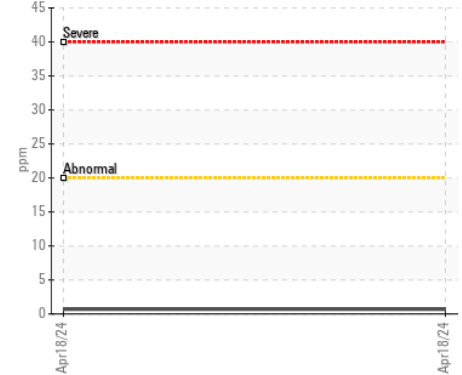


FT-IR (Direct Trend)

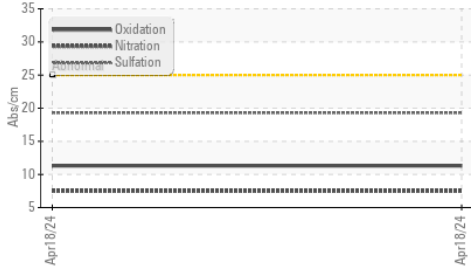


Copper (ppm)

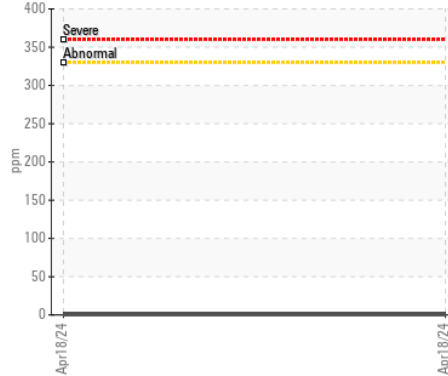


Silicon (ppm)

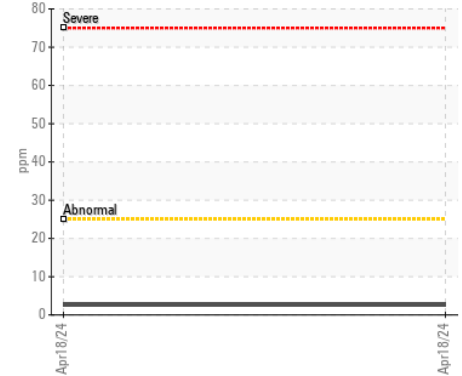

▲ Viscosity @ 100°C

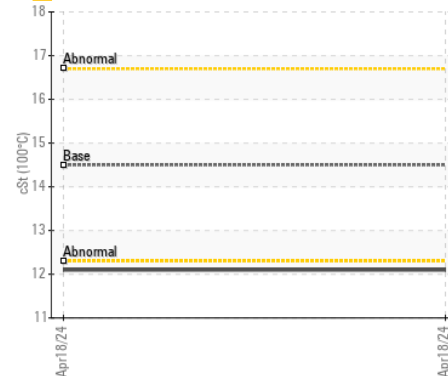

Soot %

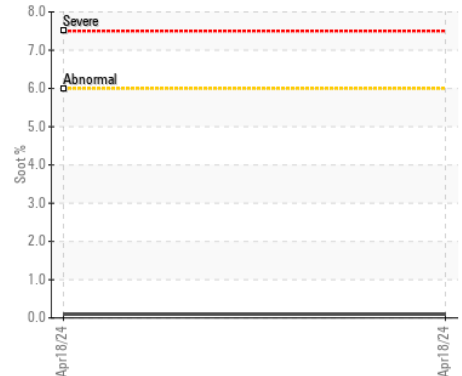

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : IL0033503

Lab Number : 02630455

Unique Number : 5763587

Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

Received : 22 Apr 2024

Tested : 23 Apr 2024

Diagnosed : 23 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

ALTRUCK IDEALEASE

2 ARROWSMITH ROAD

HAMILTON, ON

CA L8E 4H8

Contact: Kevin Pietracupa

hservice@altruck.com

T: (905)578-2211

F: (905)578-7436