



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ROADTEC 16-375
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0872152	WC0872160	---
Sample Date		Client Info		18 Apr 2024	16 Apr 2024	---
Machine Age	hrs	Client Info		3614	3600	---
Oil Age	hrs	Client Info		24	10	---
Filter Age	hrs	Client Info		24	10	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	2	1	---
Chromium	ppm	ASTM D5185(m)	>20	0	0	---
Nickel	ppm	ASTM D5185(m)	>4	0	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	---
Lead	ppm	ASTM D5185(m)	>40	0	0	---
Copper	ppm	ASTM D5185(m)	>330	<1	0	---
Tin	ppm	ASTM D5185(m)	>15	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<1	1	---
Potassium	ppm	ASTM D5185(m)	>20	0	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	4.5	4.4	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.6	17.8	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	---
Boron	ppm	ASTM D5185(m)	0	1	2	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	60	58	57	---
Manganese	ppm	ASTM D5185(m)	0	0	0	---
Magnesium	ppm	ASTM D5185(m)	1010	973	965	---
Calcium	ppm	ASTM D5185(m)	1070	1054	1049	---
Phosphorus	ppm	ASTM D5185(m)	1150	1008	996	---
Zinc	ppm	ASTM D5185(m)	1270	1165	1162	---
Sulfur	ppm	ASTM D5185(m)	2060	2615	2616	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.9	12.8	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.3	13.7	---

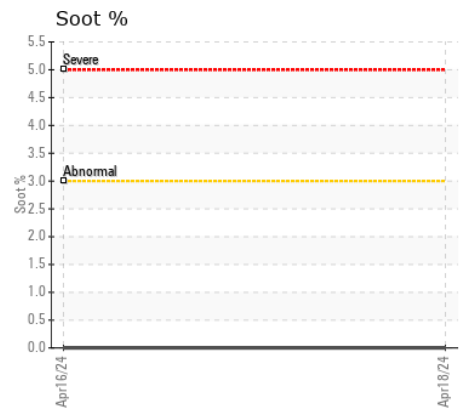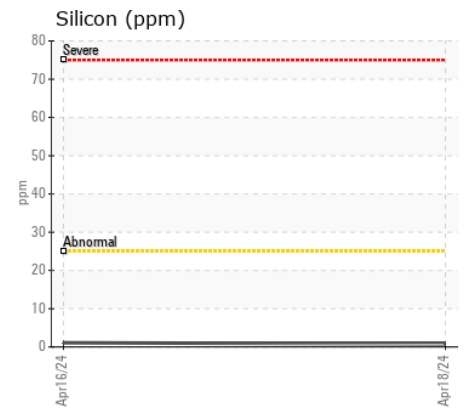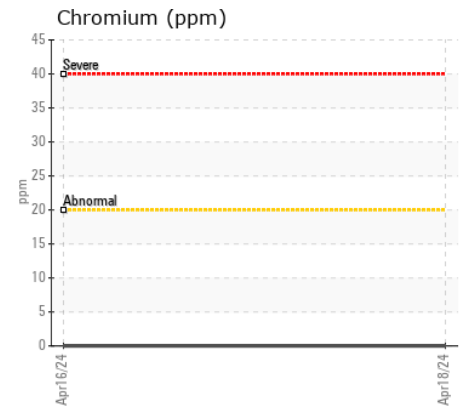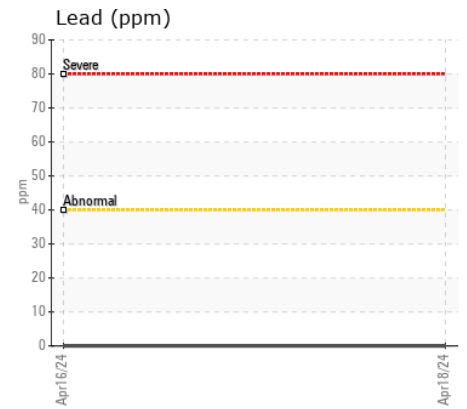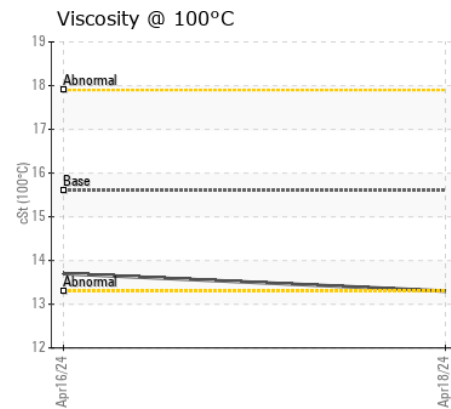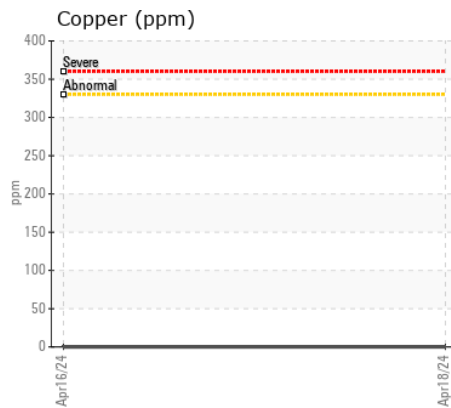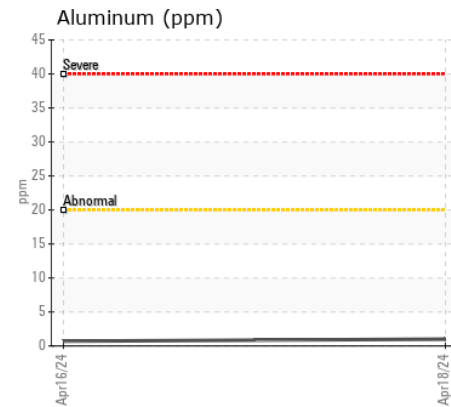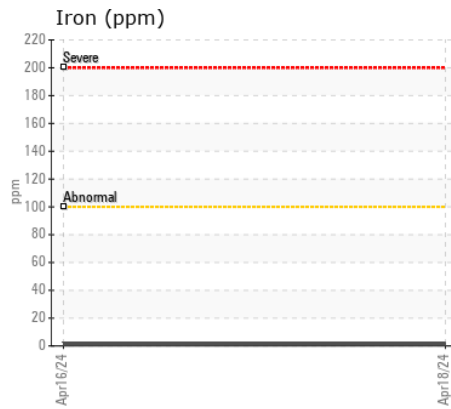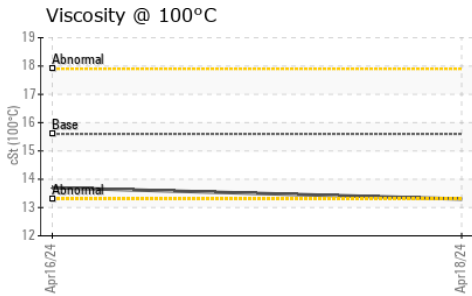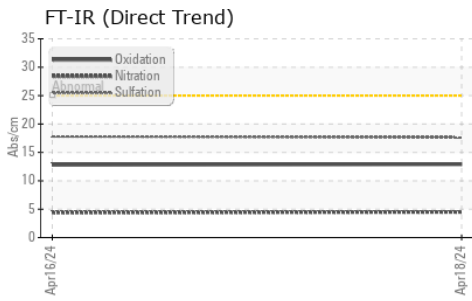

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0872152 **Received** : 22 Apr 2024
Lab Number : 02630486 **Tested** : 22 Apr 2024
Unique Number : 5763618 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : MOB 1

BRANTCO CONSTRUCTION
 1555 BISHOP STREET UNIT 1
 CAMBRIDGE, ON
 CA N1R 7J4
 Contact: Joe Cunha
 jcunha@brantco.ca
 T: (519)223-0397
 F: (519)622-2443

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.