



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**Locomotives**

Machine Id

**2001**

Component

**Railway diesel**

Fluid

**RAILWAY ENGINE OIL SAE 40 (11 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes BN to determine the suitability of the oil for continued use.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0891370</b>	WC0891367	WC0891363
Sample Date		Client Info		<b>08 Apr 2024</b>	01 Apr 2024	25 Mar 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>42	<b>16</b>	17	17
Chromium	ppm	ASTM D5185(m)	>6	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>4	<b>3</b>	3	3
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>95	<b>7</b>	7	7
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	<b>4</b>	4	4
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*		<b>0.2</b>	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.8</b>	12.1	12.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>14.8</b>	15.1	15.1
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service (unconfirmed).

Sodium	ppm	ASTM D5185(m)		<b>10</b>	11	12
Boron	ppm	ASTM D5185(m)	10	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	25	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	20	<b>17</b>	17	17
Calcium	ppm	ASTM D5185(m)	4500	<b>4706</b>	4762	4741
Phosphorus	ppm	ASTM D5185(m)	10	<b>4</b>	2	3
Zinc	ppm	ASTM D5185(m)	10	<b>5</b>	3	4
Sulfur	ppm	ASTM D5185(m)	5000	<b>2925</b>	3010	2967
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>9.2</b>	9.5	9.8
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>15.1</b>	14.9	15.1

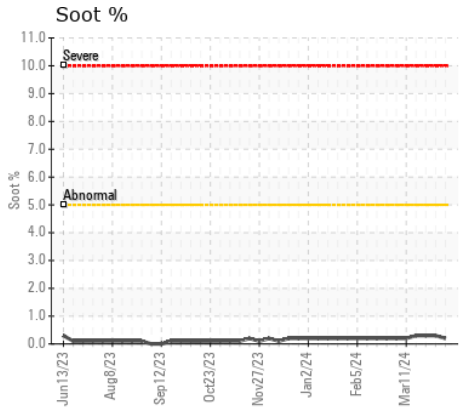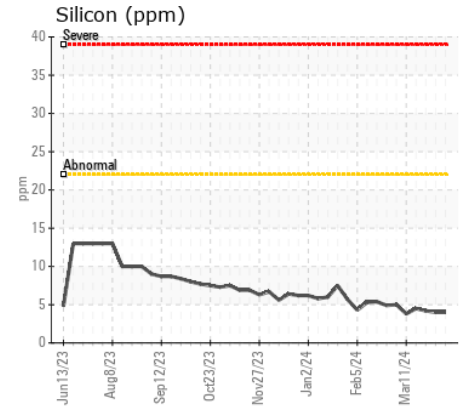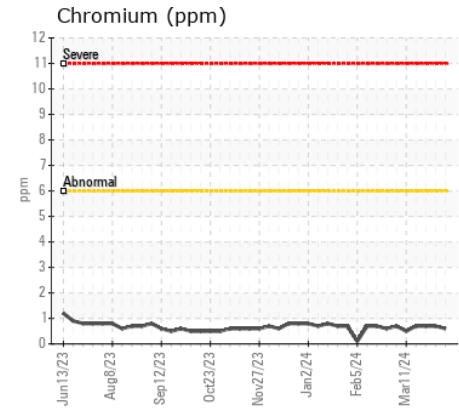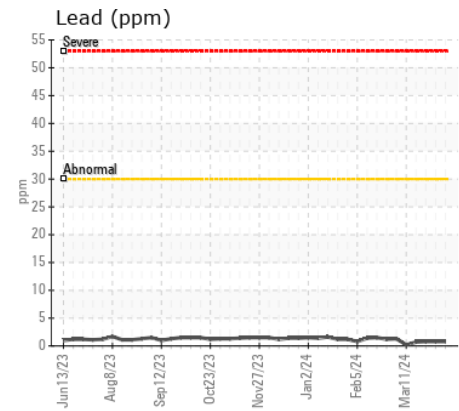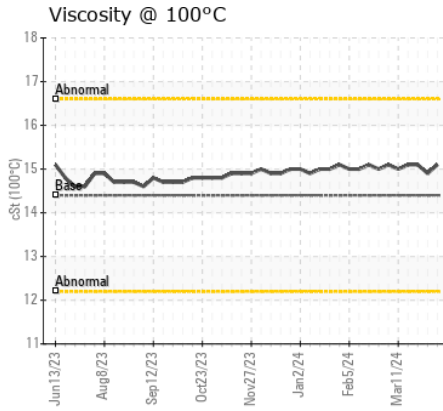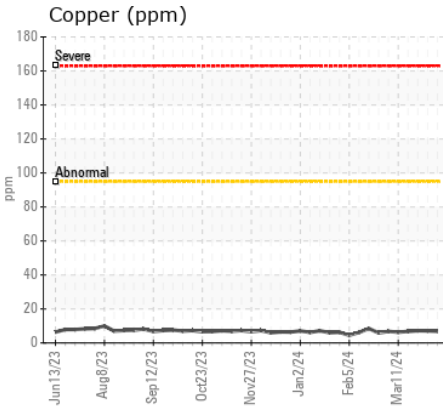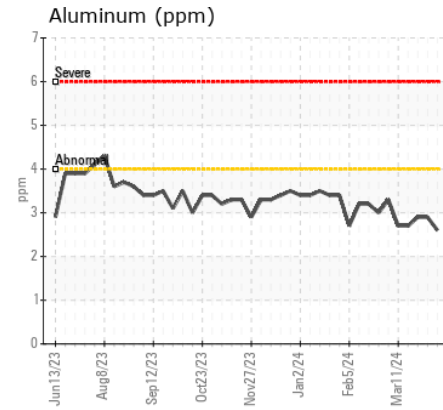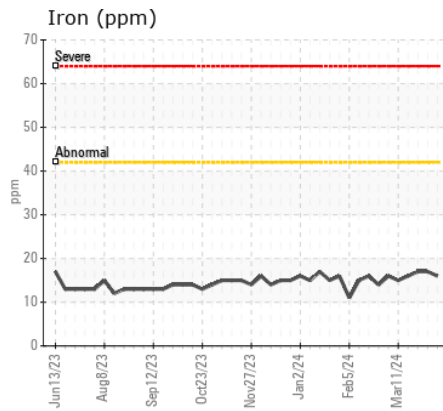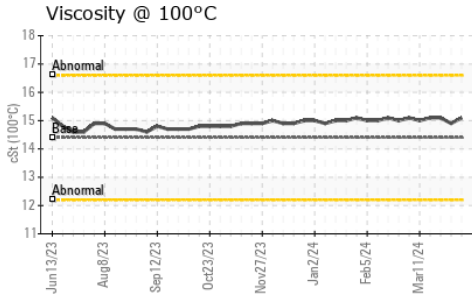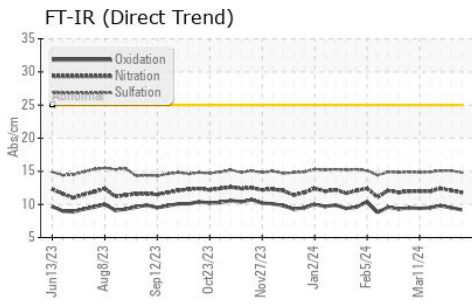

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

**Sample No.** : WC0891370

**Lab Number** : 02630512

**Unique Number** : 5763644

**Test Package** : MOB 1 ( Additional Tests: Visual )

**Received** : 22 Apr 2024

**Tested** : 22 Apr 2024

**Diagnosed** : 22 Apr 2024 - Kevin Marson

**Vale - Transportation (Mobile Equipment)**

Transportation Department, (Services - Mobile Equipment)

COPPER CLIFF, ON

CA P0M 1N0

Contact: Richard Rochon

richard.rochon@vale.com

T: (705)682-6014

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.