



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 144578-1253

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0278708	LH0278615	LH
Sample Date		Client Info		05 Apr 2024	15 Jan 2024	04 Oct 2023
Machine Age	hrs	Client Info		1300	1200	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	21	21	20
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>2	<1	1	<1
Lead	ppm	ASTM D5185(m)	>4	0	<1	1
Copper	ppm	ASTM D5185(m)	>10	5	5	6
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION









The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>17	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	4893	8061	28895
Particles >6µm		ASTM D7647	>5000	666	2087	11613
Particles >14µm		ASTM D7647	>640	44	136	888
Particles >21µm		ASTM D7647	>160	11	21	123
Particles >38µm		ASTM D7647	>40	1	1	1
Particles >71µm		ASTM D7647	>10	0	0	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/17/13	20/18/14	22/21/17
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	.5%

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	0	<1	<1	1
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	<1	0	0
Magnesium	ppm	ASTM D5185(m)	0	3	3	3
Calcium	ppm	ASTM D5185(m)	100	1097	1108	1211
Phosphorus	ppm	ASTM D5185(m)	670	609	639	614
Zinc	ppm	ASTM D5185(m)	850	707	712	714
Sulfur	ppm	ASTM D5185(m)	1600	3172	3417	3430
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	44.0	44.0	44.2

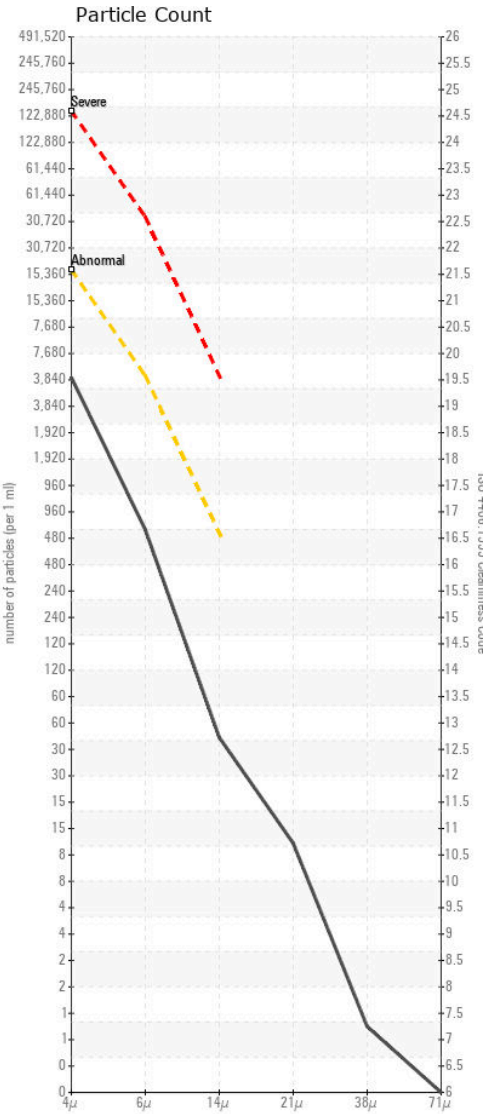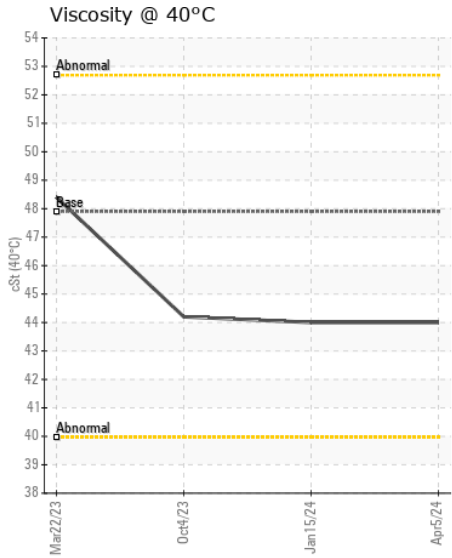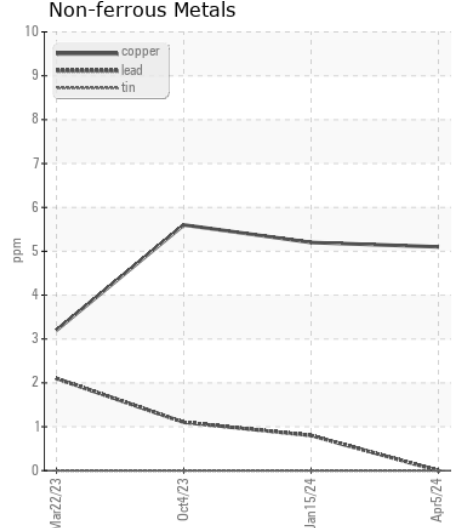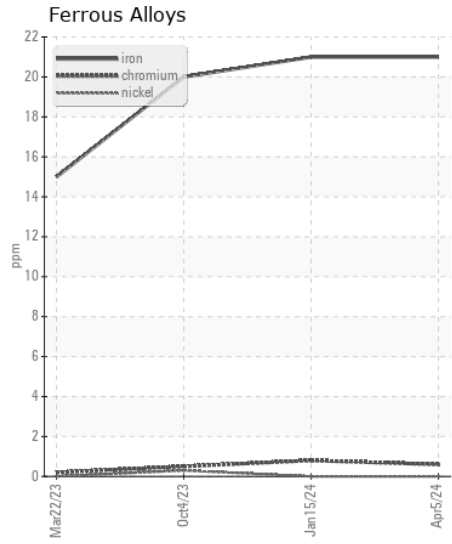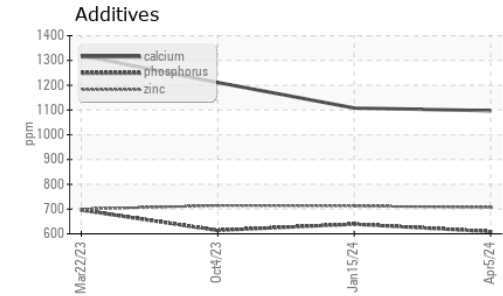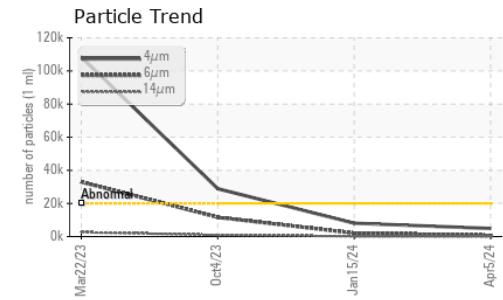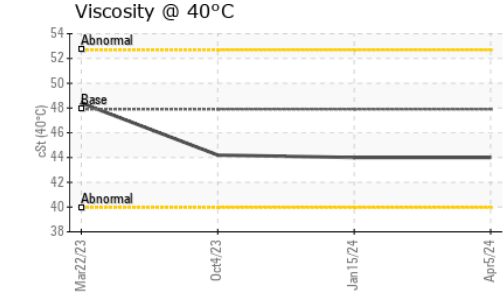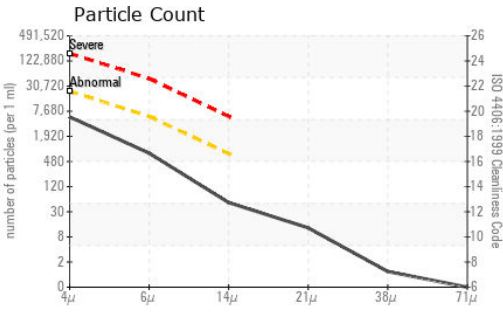

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0278708 **Received** : 22 Apr 2024
Lab Number : 02630621 **Tested** : 23 Apr 2024
Unique Number : 5763753 **Diagnosed** : 23 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PrtCount)

Industrial Metals
 550 Messier St.
 Winnipeg, MB
 CA R2J 0G5
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: