



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**KYNOCKS [8000401564]**

Machine Id  
**VOLVO E380EL 315163**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP391656	---	---
Sample Date		Client Info		18 Apr 2024	---	---
Machine Age	hrs	Client Info		2203	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	3	---	---
Chromium	ppm	ASTM D5185(m)	>10	2	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Copper	ppm	ASTM D5185(m)	>75	18	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	2952	---	---
Particles >6µm		ASTM D7647	>1300	249	---	---
Particles >14µm		ASTM D7647	>160	20	---	---
Particles >21µm		ASTM D7647	>40	6	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/15/11	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	5	0	---	---
Barium	ppm	ASTM D5185(m)	5	0	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	25	<1	---	---
Calcium	ppm	ASTM D5185(m)	200	65	---	---
Phosphorus	ppm	ASTM D5185(m)	300	383	---	---
Zinc	ppm	ASTM D5185(m)	370	453	---	---
Sulfur	ppm	ASTM D5185(m)	2500	886	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	46	40.9	---	---

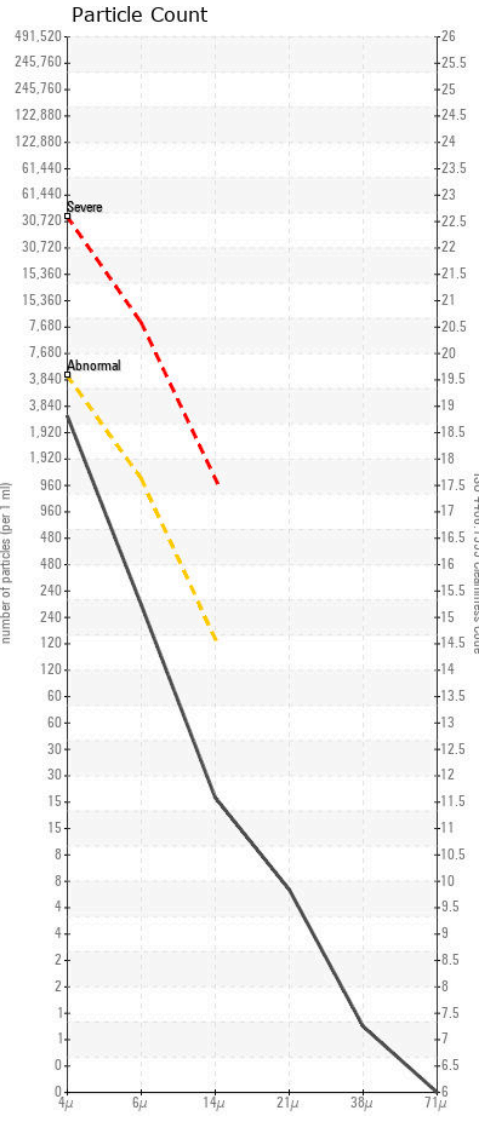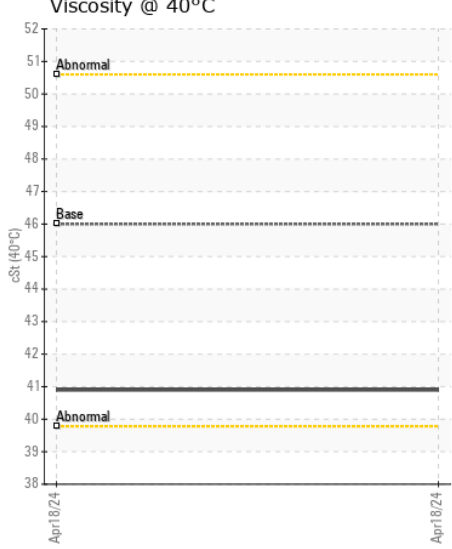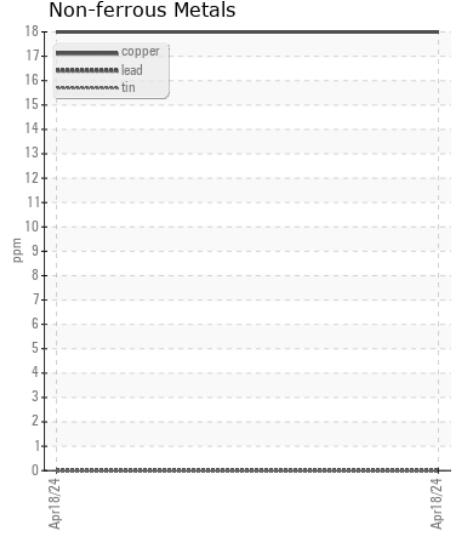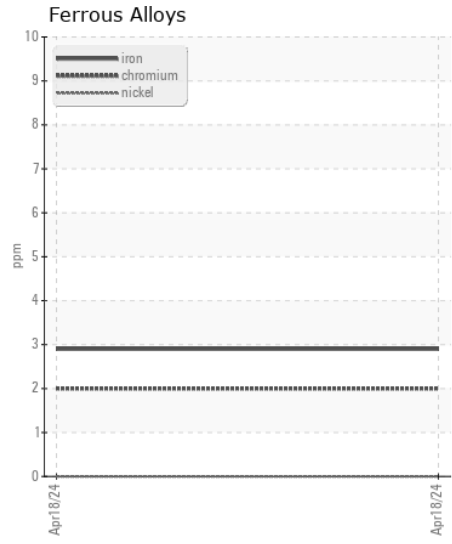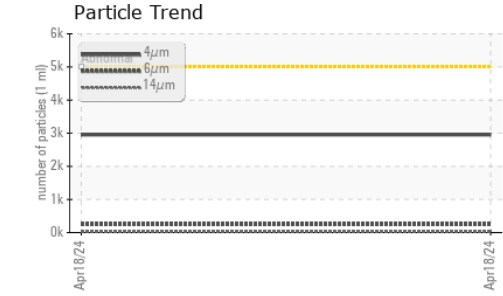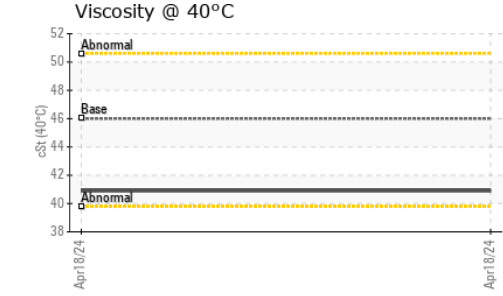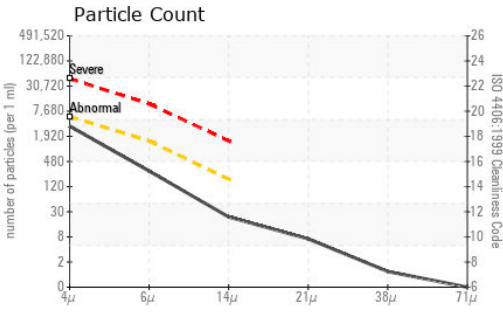

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP391656 **Received** : 22 Apr 2024  
**Lab Number** : 02630631 **Tested** : 23 Apr 2024  
**Unique Number** : 5763763 **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )

**STRONGCO EQUIPMENT INC.**  
 55 ISNOR DRIVE, BURNSIDE INDUSTRIALPARK  
 DARTMOUTH, NS  
 CA B3B 1N6  
 Contact: Lindsay Downs  
 ldowns@strongco.com  
 T: (902)468-5010  
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.