

Machine Id  
**1216**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

**WEAR**

All component wear rates are normal.











**CONTAMINATION**

There is no indication of any contamination in the fluid.

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0085225</b>	PC0078262	PC0070838
Sample Date		Client Info		<b>21 Apr 2024</b>	25 Jul 2023	16 Apr 2023
Machine Age	hrs	Client Info		<b>7901</b>	6889	6386
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>160	<b>41</b>	129	119
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>9</b>	27	25
Lead	ppm	ASTM D5185(m)	>50	<b>7</b>	28	28
Copper	ppm	ASTM D5185(m)	>225	<b>8</b>	15	12
Tin	ppm	ASTM D5185(m)	>10	<b>1</b>	5	4
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	<b>4</b>	8	8
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	3	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	VLITE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	.2%	NEG
Sodium	ppm	ASTM D5185(m)		<b>3</b>	5	6
Boron	ppm	ASTM D5185(m)		<b>68</b>	65	68
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	2
Magnesium	ppm	ASTM D5185(m)		<b>3</b>	1	<1
Calcium	ppm	ASTM D5185(m)		<b>115</b>	92	96
Phosphorus	ppm	ASTM D5185(m)		<b>205</b>	231	241
Zinc	ppm	ASTM D5185(m)		<b>7</b>	22	20
Sulfur	ppm	ASTM D5185(m)		<b>1264</b>	1015	1068
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>33.1</b>	32.6	32.8
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	<b>6.5</b>	6.4	6.4
Viscosity Index (VI)	Scale	ASTM D2270*	155	<b>154</b>	152	150

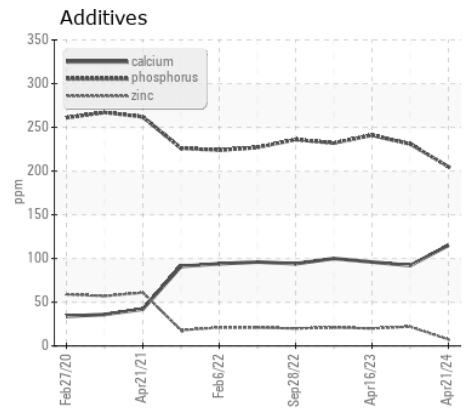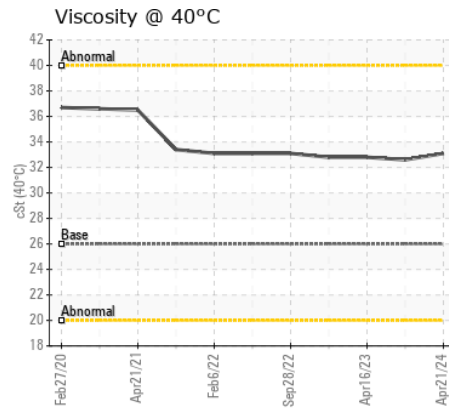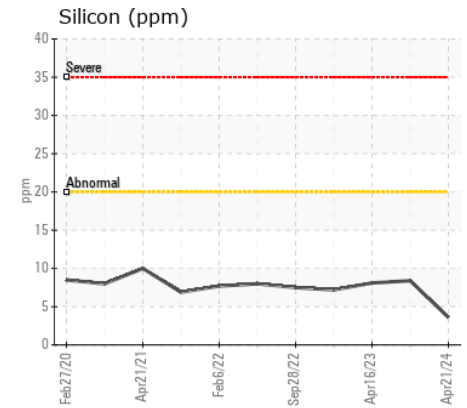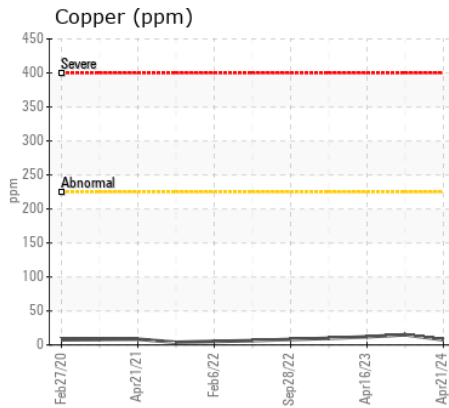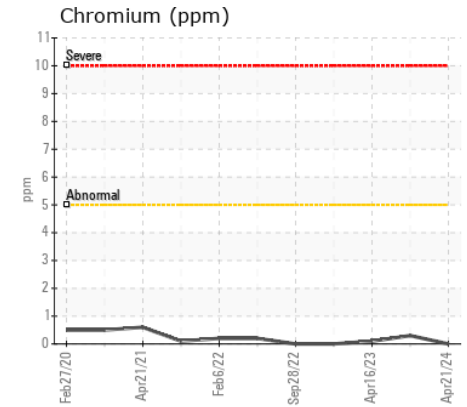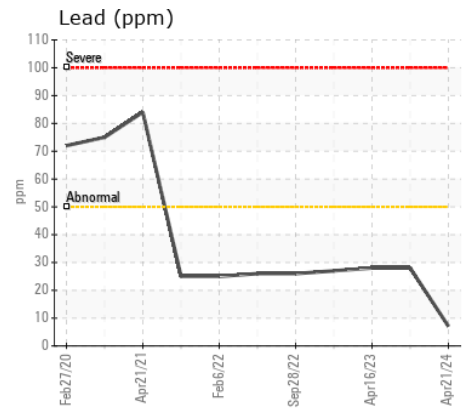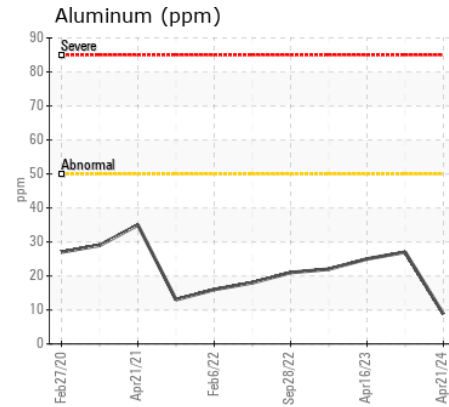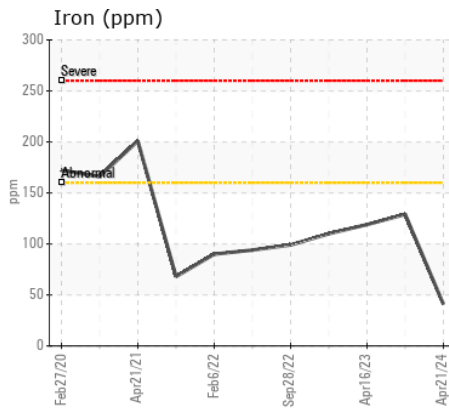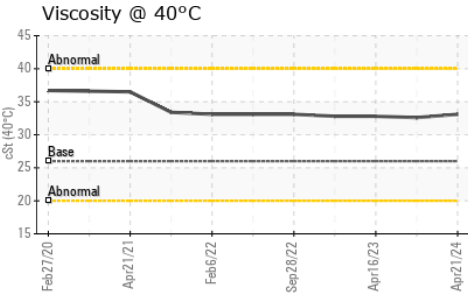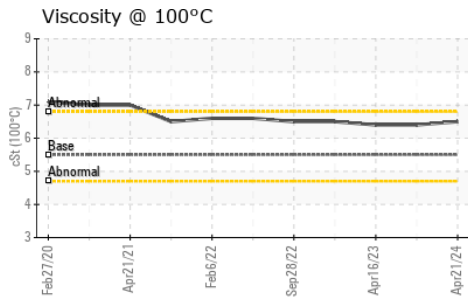

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0085225  
**Lab Number** : 02630645  
**Unique Number** : 5763777  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )  
**Received** : 22 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Wes Davis

**LES ENTREPRISES MICHAUVILLE INC.**  
 270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: