



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
8416
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0117085	GFL0089682	GFL0089673
Sample Date		Client Info		04 Apr 2024	05 Oct 2023	08 Aug 2023
Machine Age	hrs	Client Info		16922	16546	16346
Oil Age	hrs	Client Info		13074	6000	13074
Filter Age	hrs	Client Info		13074	6000	13074
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>300	29	103	94
Chromium	ppm	ASTM D5185(m)	>2	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>3	0	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>70	16	59	56
Lead	ppm	ASTM D5185(m)	>85	3	21	21
Copper	ppm	ASTM D5185(m)	>90	5	26	24
Tin	ppm	ASTM D5185(m)	>10	<1	5	5
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	7	10	10
Potassium	ppm	ASTM D5185(m)	>20	<1	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		12	27	26
Boron	ppm	ASTM D5185(m)		96	118	116
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		<1	0	0
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		<1	<1	1
Calcium	ppm	ASTM D5185(m)		115	71	71
Phosphorus	ppm	ASTM D5185(m)		301	299	310
Zinc	ppm	ASTM D5185(m)		4	5	6
Sulfur	ppm	ASTM D5185(m)		2822	952	872
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	37.0	36.6	36.3

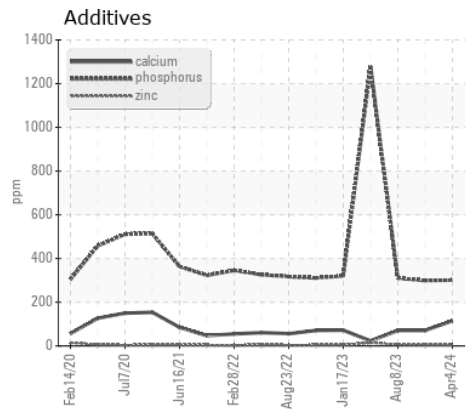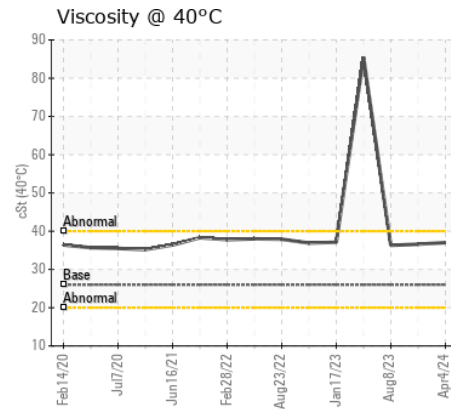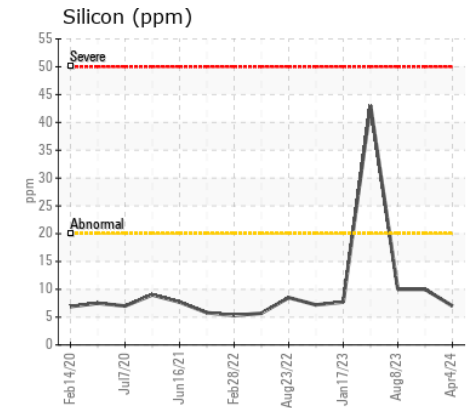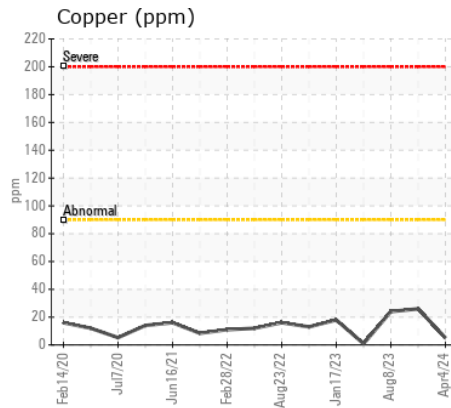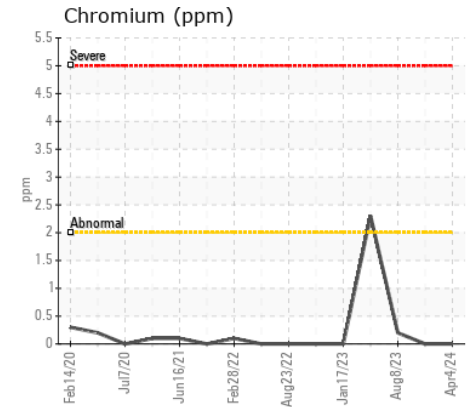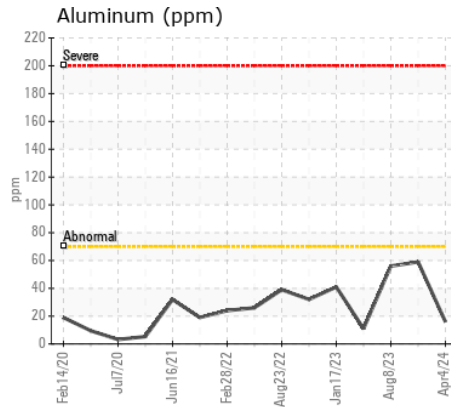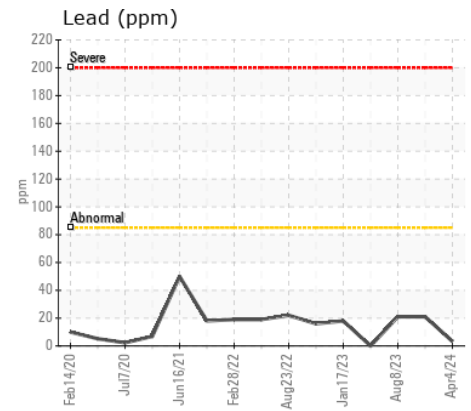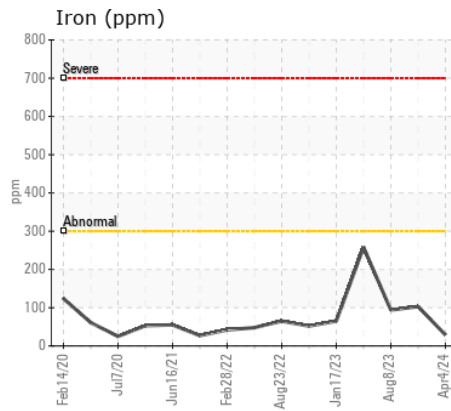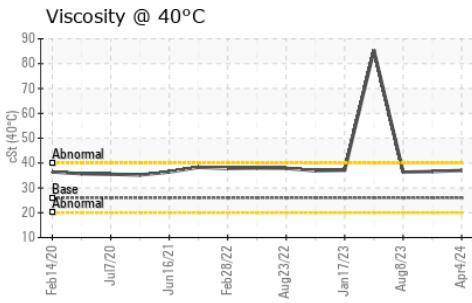

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0117085
Lab Number : 02630663
Unique Number : 5763795
Test Package : MOB 1
Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

GFL Environmental - 732 - Beauce - Hauling - Solid Waste
 139, 181 Street,
 Beauceville, QC
 CA G5X 2S9
 Contact: Denis Bedard

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (418)774-5275
 F: