



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

KYNOCKS [401654]

Machine Id

VOLVO E380EL 315163

Component

Rear Right Final Drive

Fluid

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP391654	---	---
Sample Date		Client Info		21 Apr 2024	---	---
Machine Age	hrs	Client Info		2203	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184*		861	---	---
Iron	ppm	ASTM D5185(m)	>500	1107	---	---
Chromium	ppm	ASTM D5185(m)	>10	20	---	---
Nickel	ppm	ASTM D5185(m)	>10	1	---	---
Titanium	ppm	ASTM D5185(m)		5	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	76	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	378	---	---
Potassium	ppm	ASTM D5185(m)	>20	27	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	LIGHT	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	16	---	---
Boron	ppm	ASTM D5185(m)	400	119	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<1	---	---
Manganese	ppm	ASTM D5185(m)		11	---	---
Magnesium	ppm	ASTM D5185(m)	12	10	---	---
Calcium	ppm	ASTM D5185(m)	150	43	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	830	---	---
Zinc	ppm	ASTM D5185(m)	125	8	---	---
Sulfur	ppm	ASTM D5185(m)	22500	20456	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	145	---	---

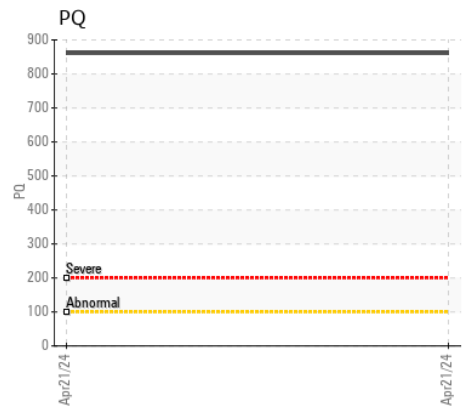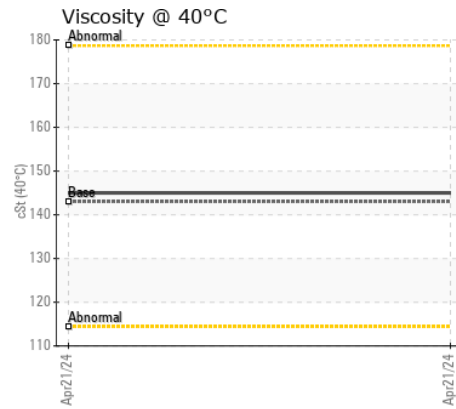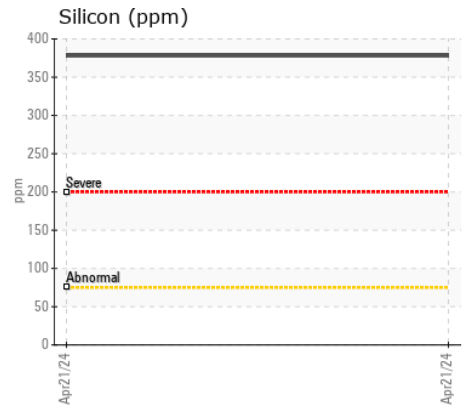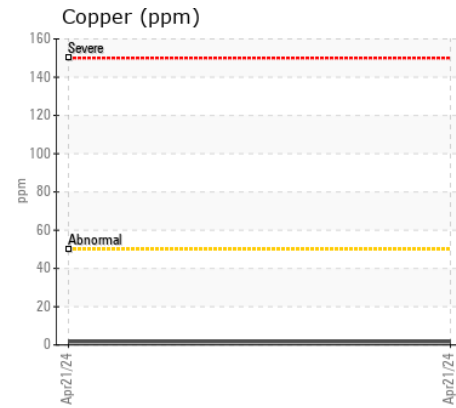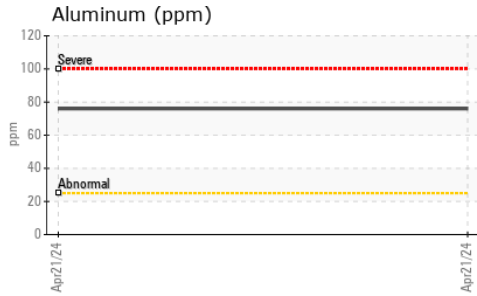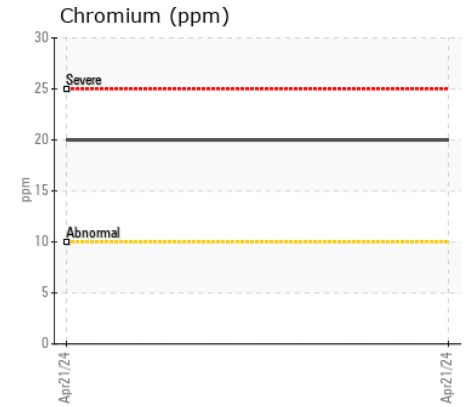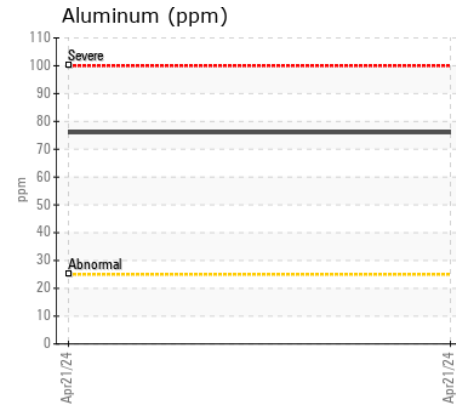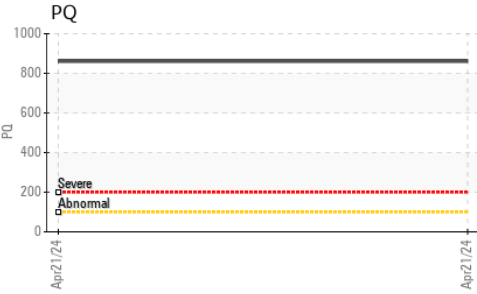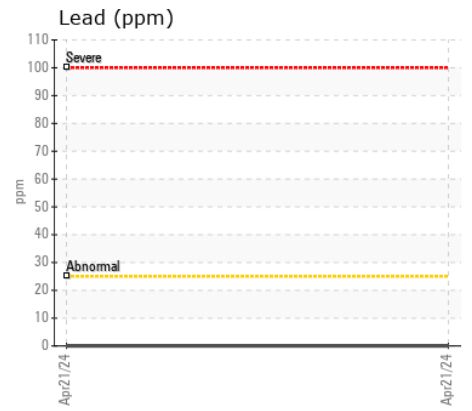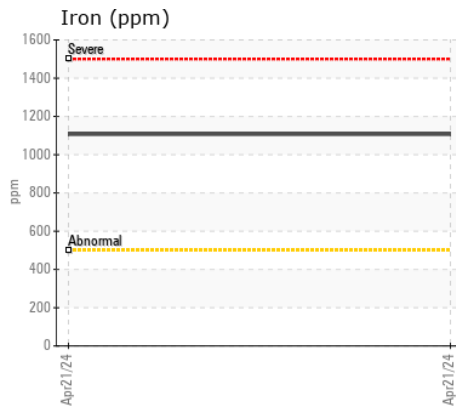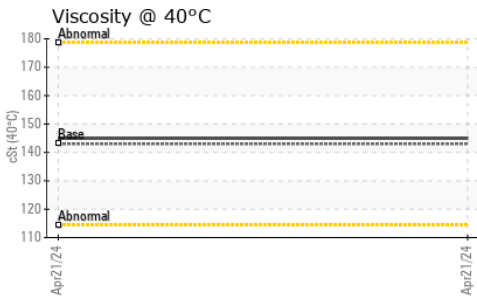

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP391654 **Received** : 22 Apr 2024
Lab Number : 02630667 **Tested** : 23 Apr 2024
Unique Number : 5763799 **Diagnosed** : 23 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)

STRONGCO EQUIPMENT INC.
 55 ISNOR DRIVE, BURNSIDE INDUSTRIALPARK
 DARTMOUTH, NS
 CA B3B 1N6
 Contact: Lindsay Downs
 ldowns@strongco.com
 T: (902)468-5010
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.