



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[5480]
 Machine Id
352150
 Component
Unknown Component
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

WEAR

Component wear rates appear to be normal (unconfirmed).










CONTAMINATION

There is no indication of any contamination in the sample.

FLUID CONDITION

The condition of the sample is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP394997	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		5936	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)		52	---	---
Chromium	ppm	ASTM D5185(m)		1	---	---
Nickel	ppm	ASTM D5185(m)		4	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		2	---	---
Lead	ppm	ASTM D5185(m)		2	---	---
Copper	ppm	ASTM D5185(m)		125	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)		19	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method		NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		104	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)		20	---	---
Calcium	ppm	ASTM D5185(m)		3736	---	---
Phosphorus	ppm	ASTM D5185(m)		1129	---	---
Zinc	ppm	ASTM D5185(m)		1434	---	---
Sulfur	ppm	ASTM D5185(m)		3702	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		49.3	---	---

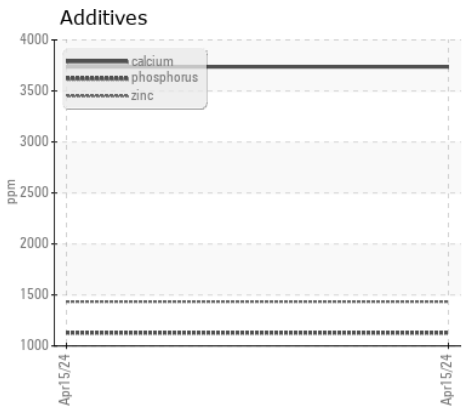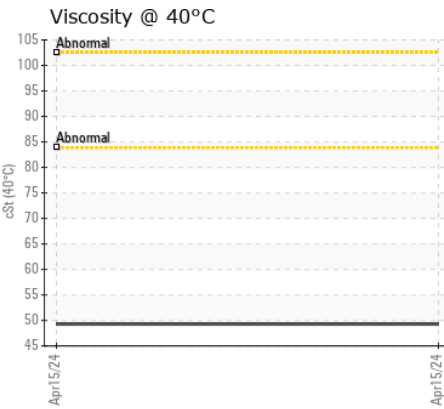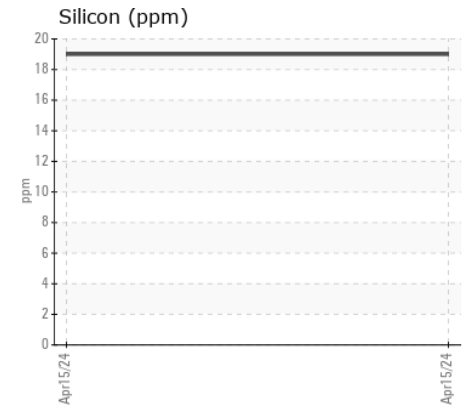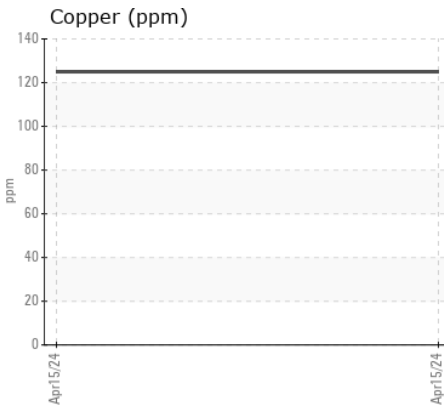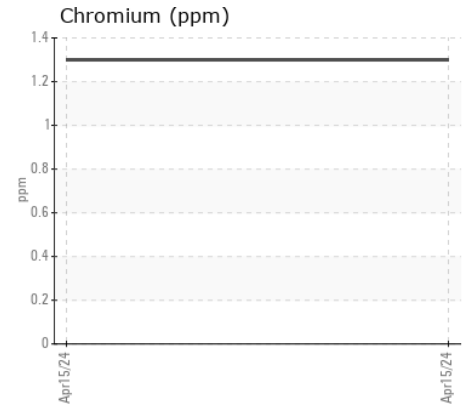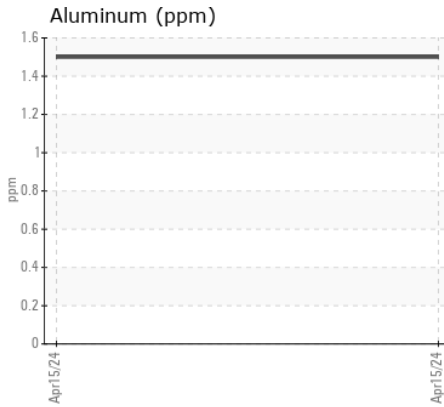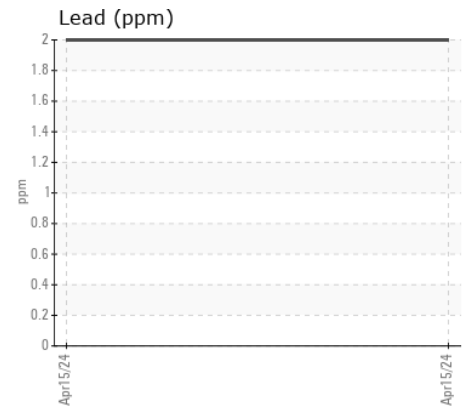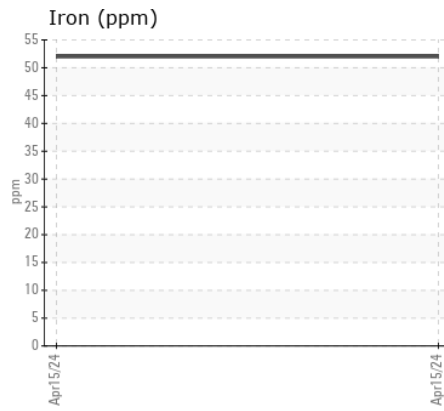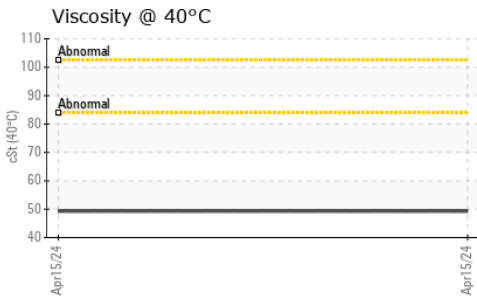

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP394997
Lab Number : 02630680
Unique Number : 5763812
Test Package : MOB 1

Received : 22 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Kevin Marson

GREAT WEST EQUIPMENT
 1600 KOSMINA ROAD, 123 L&A CROSS RD
 VERNON, BC
 CA V1T 8T2

Contact: Sarah Lawrence
 slawrence@gwequipment.com
 T: (866)627-2357
 F: (250)549-3397

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.