



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area

[5480]

Machine Id

352150

Component

Drop Box

Fluid

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a moderate concentration of dirt present in the oil.

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP392994	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		5936	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185(m)	>500	211	---	---
Chromium	ppm	ASTM D5185(m)	>20	3	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	8	---	---
Lead	ppm	ASTM D5185(m)	>30	0	---	---
Copper	ppm	ASTM D5185(m)	>30	8	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>50	▲ 159	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>170	2	---	---
Boron	ppm	ASTM D5185(m)	400	142	---	---
Barium	ppm	ASTM D5185(m)	200	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	12	12	---	---
Manganese	ppm	ASTM D5185(m)		4	---	---
Magnesium	ppm	ASTM D5185(m)	12	3	---	---
Calcium	ppm	ASTM D5185(m)	150	23	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1035	---	---
Zinc	ppm	ASTM D5185(m)	125	33	---	---
Sulfur	ppm	ASTM D5185(m)	22500	23898	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	125	---	---

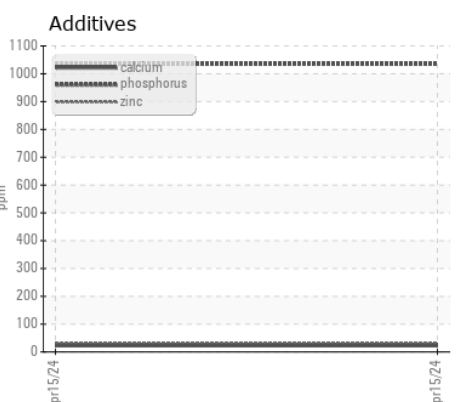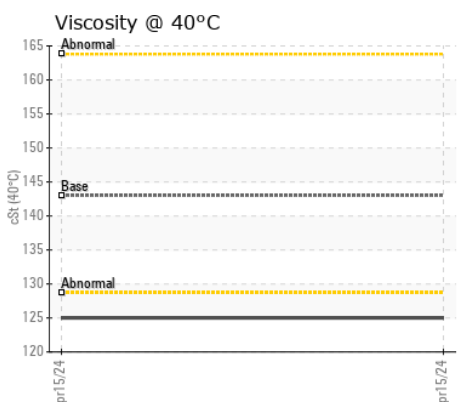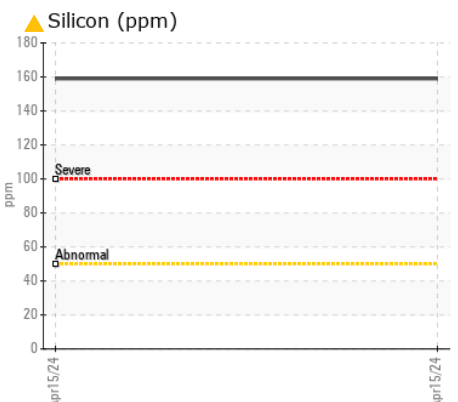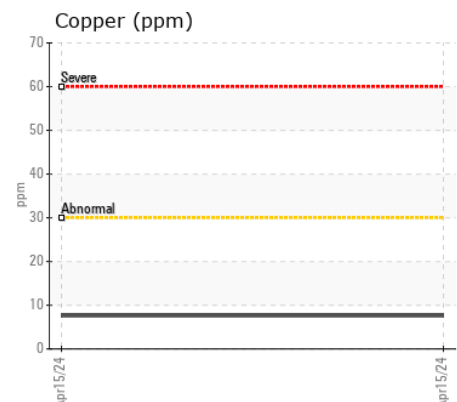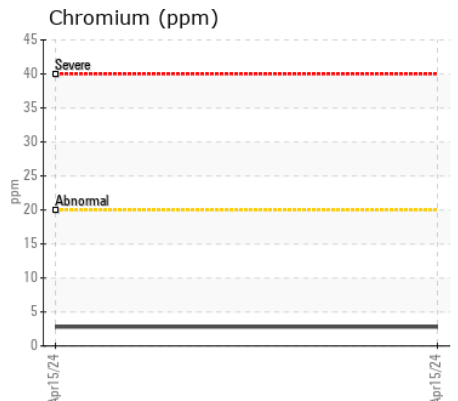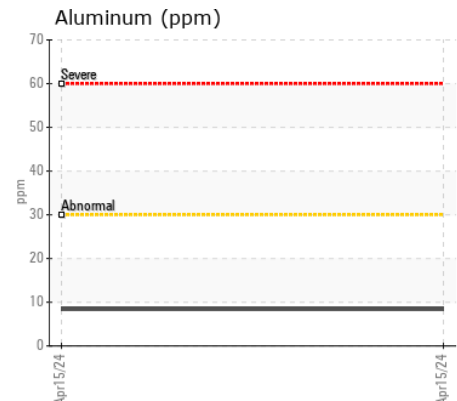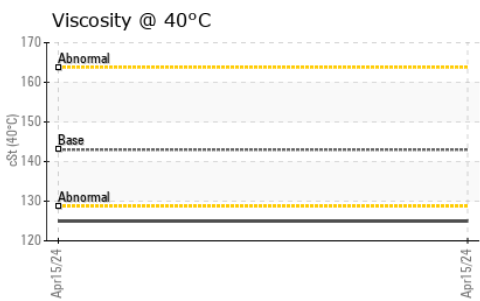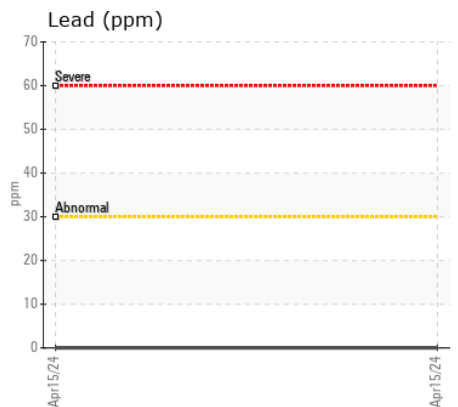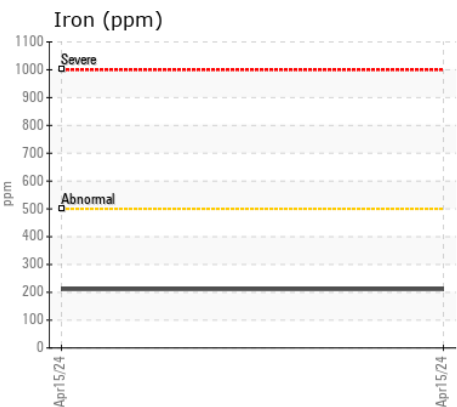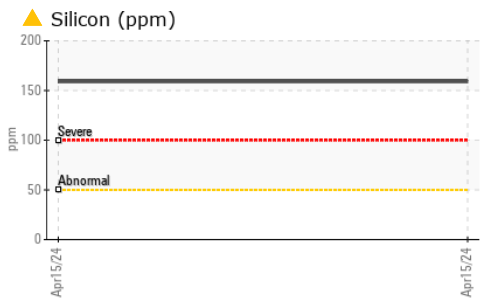

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP392994
Lab Number : 02630711
Unique Number : 5763843
Test Package : MOB 1

GREAT WEST EQUIPMENT
 1600 KOSMINA ROAD, 123 L&A CROSS RD
 VERNON, BC
 CA V1T 8T2
 Contact: Sarah Lawrence
 slawrence@gwequipment.com
 T: (866)627-2357
 F: (250)549-3397

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.