



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KMB EXCAVATION
Machine Id
JOHN DEERE 250D ART03 (S/N DW250DT611595)
Component
Center Left Final Drive
Fluid
APRIL SUPERFLO MULTIGRADE GEAR FLUID 80W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASF0000311	ASF0000296	WC0523664
Sample Date		Client Info		10 Apr 2024	10 Apr 2024	21 Oct 2021
Machine Age	hrs	Client Info		14526	14526	11320
Oil Age	hrs	Client Info		995	995	2000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	N/A	Changed
Filter Changed		Client Info		Not Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>750	23	20	44
Chromium	ppm	ASTM D5185(m)	>9	0	0	<1
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>40	<1	<1	2
Lead	ppm	ASTM D5185(m)	>15	0	0	<1
Copper	ppm	ASTM D5185(m)	>40	6	3	9
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>75	1	<1	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.075	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>51	<1	3	0
Boron	ppm	ASTM D5185(m)		8	7	50
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		3	5	9
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		4	6	5
Calcium	ppm	ASTM D5185(m)		11	62	20
Phosphorus	ppm	ASTM D5185(m)		852	757	1188
Zinc	ppm	ASTM D5185(m)		16	35	33
Sulfur	ppm	ASTM D5185(m)		14461	14478	15548
Visc @ 40°C	cSt	ASTM D7279(m)	152.5	130	128	132

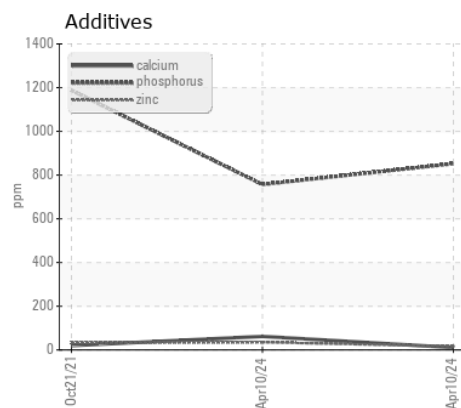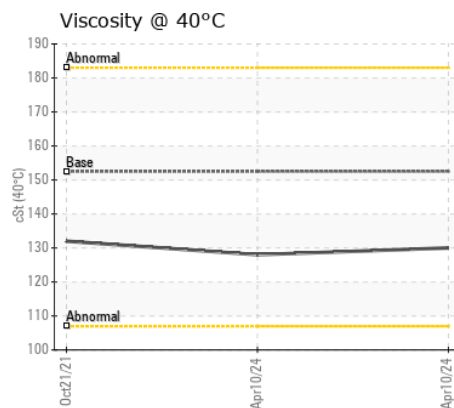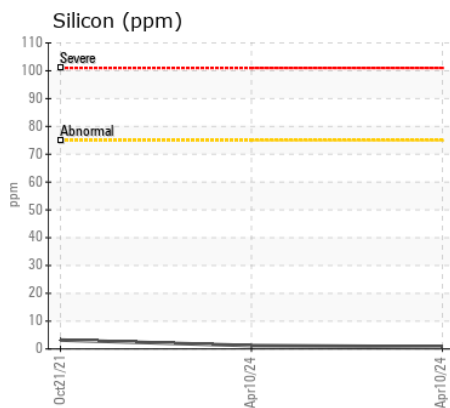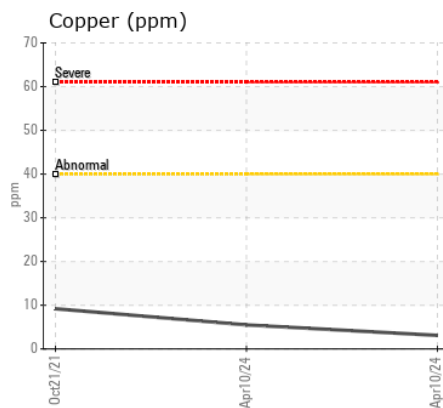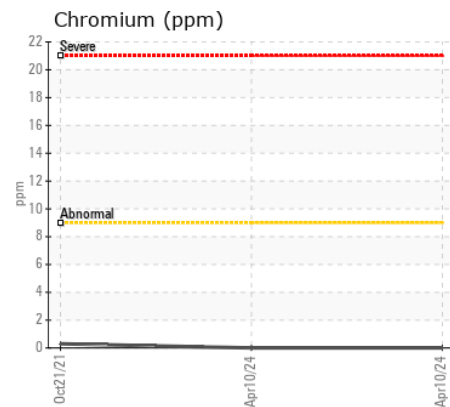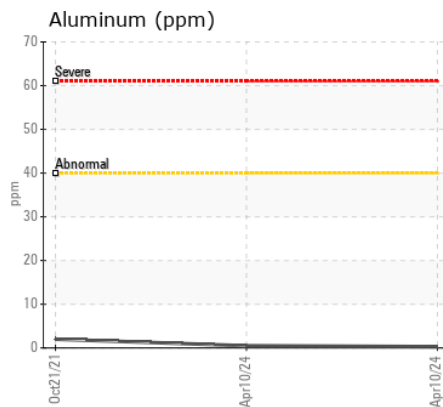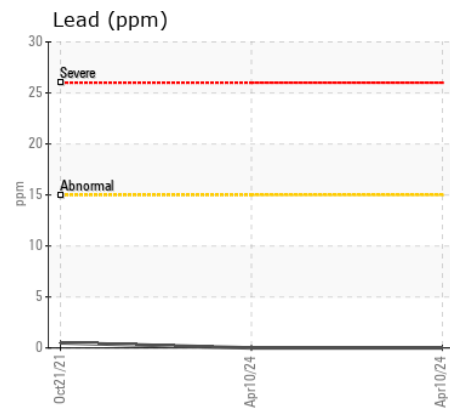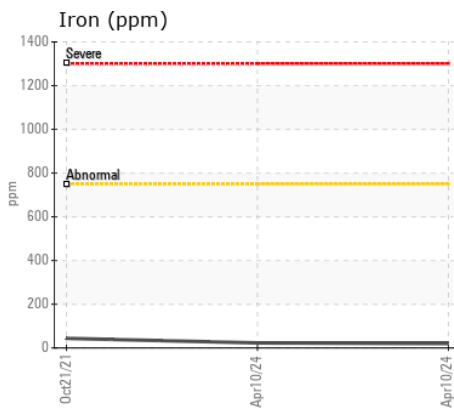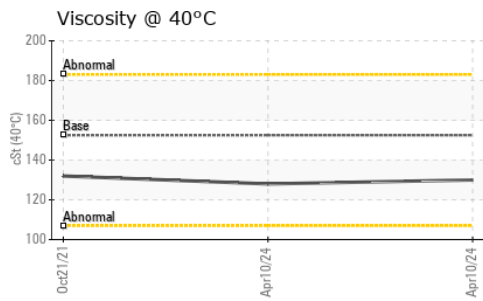

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000311 **Received** : 22 Apr 2024
Lab Number : 02630733 **Tested** : 22 Apr 2024
Unique Number : 5763865 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : MOB 1

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Michel Jalbert
 mjalbert@aprilsuperflo.com
 T:
 F: (418)898-2192

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.