



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**WL0052**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113161</b>	---	---
Sample Date		Client Info		<b>12 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>9987</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>20</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>9</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

**CONTAMINATION**












There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Fuel	%	ASTM D7593*	>5	<b>▲ 5.4</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.6</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)	0	<b>6</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	60	<b>62</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	1010	<b>916</b>	---	---
Calcium	ppm	ASTM D5185(m)	1070	<b>1157</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>960</b>	---	---
Zinc	ppm	ASTM D5185(m)	1270	<b>1163</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2060	<b>2413</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.9</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>▲ 11.4</b>	---	---

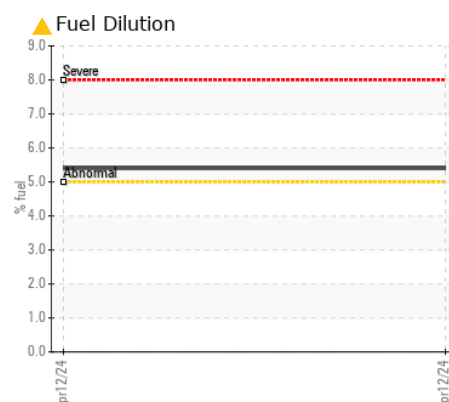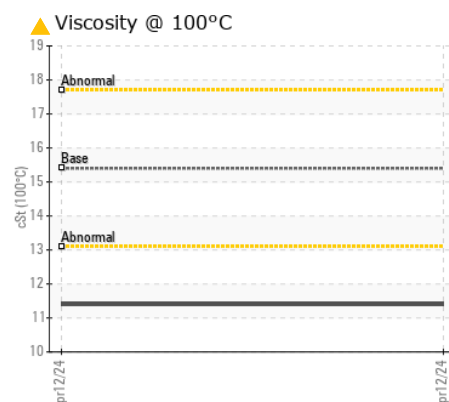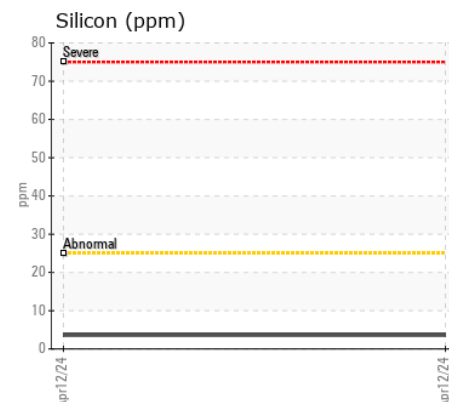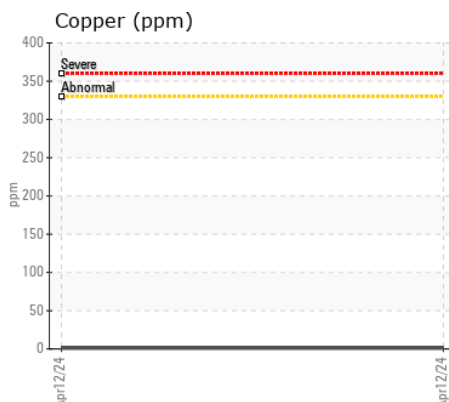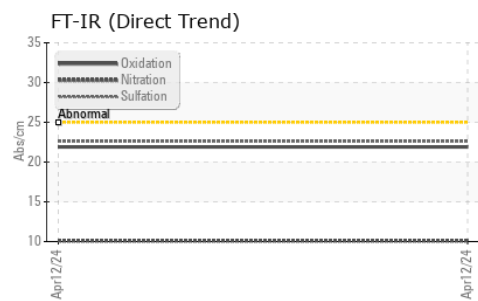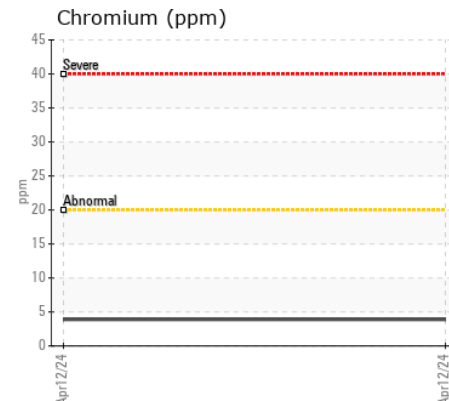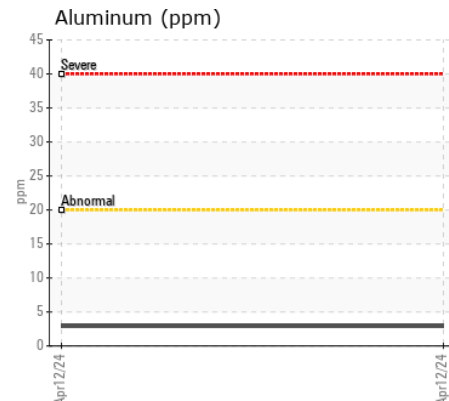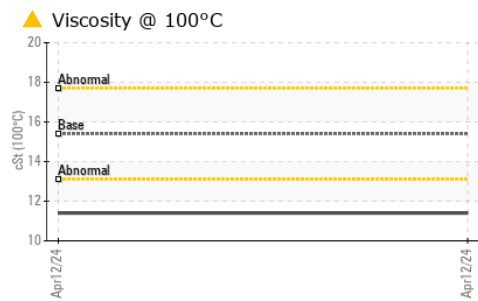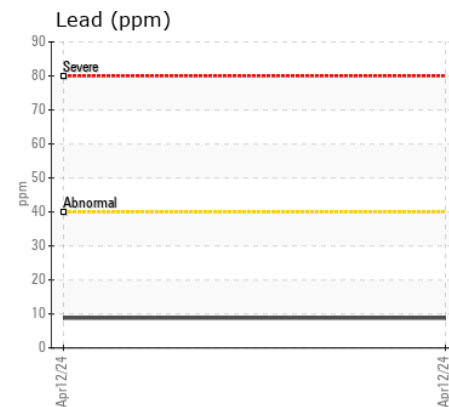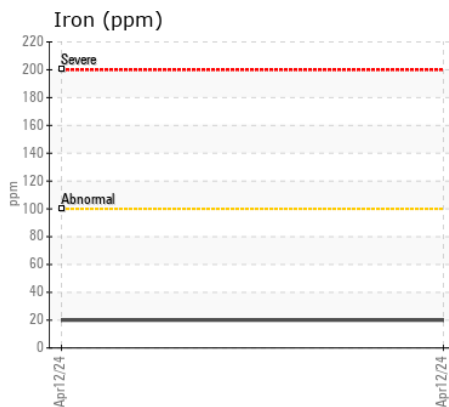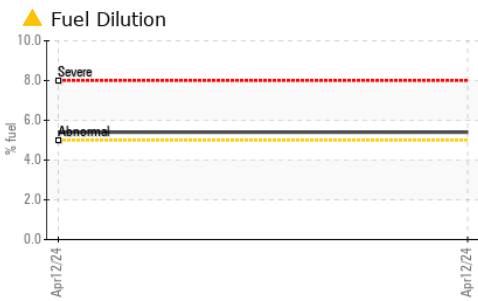

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113161 **Received** : 23 Apr 2024  
**Lab Number** : 02630901 **Tested** : 24 Apr 2024  
**Unique Number** : 5772054 **Diagnosed** : 24 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 582 - Nanaimo**  
 3469 Aqua Terra Rd.,  
 Cassidy, BC  
 CA V0R 1H0  
 Contact: GFL Tech  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.