



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(344443)

Machine Id
LIEBHERR LH24 118108-1251

Component
Front Right Wheel Hub

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0250456	LH0260607	LH0250353
Sample Date		Client Info		04 Apr 2024	21 Sep 2023	14 May 2023
Machine Age	hrs	Client Info		7662	6390	5211
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	35	86	33
Chromium	ppm	ASTM D5185(m)	>4	0	<1	0
Nickel	ppm	ASTM D5185(m)	>2	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>4	0	0	<1
Copper	ppm	ASTM D5185(m)	>75	4	7	6
Tin	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	LIGHT	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	LIGHT	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	2	6	5
Potassium	ppm	ASTM D5185(m)	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	5	5
Boron	ppm	ASTM D5185(m)	328	202	45	93
Barium	ppm	ASTM D5185(m)	1	0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1	1	2	<1
Calcium	ppm	ASTM D5185(m)	7	50	102	171
Phosphorus	ppm	ASTM D5185(m)	1145	1054	809	1134
Zinc	ppm	ASTM D5185(m)	3	31	37	49
Sulfur	ppm	ASTM D5185(m)	17909	19714	20768	22696
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	101	101	100

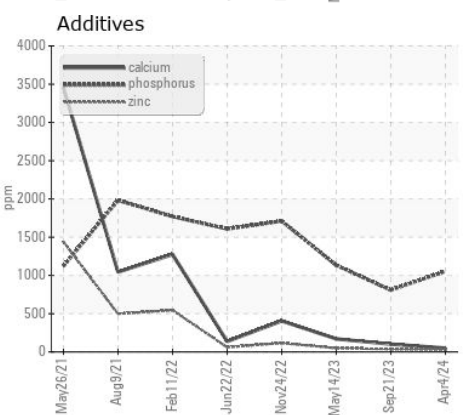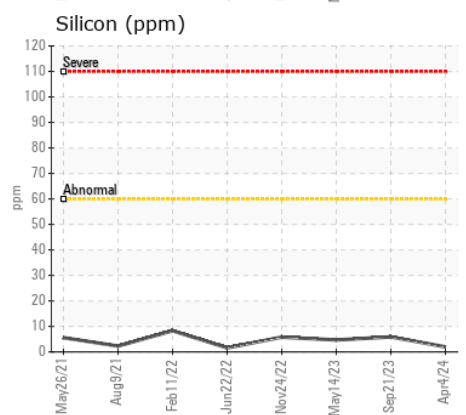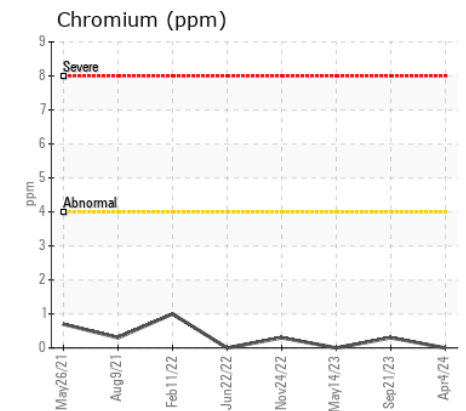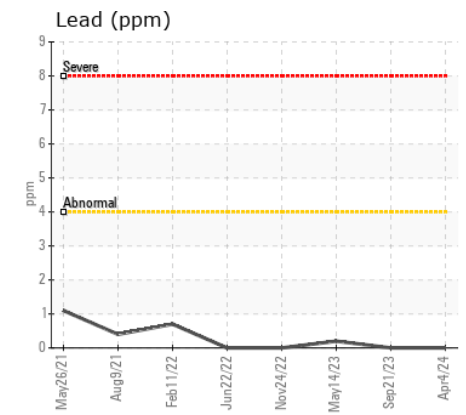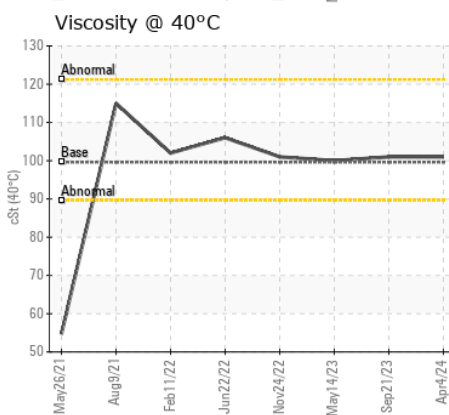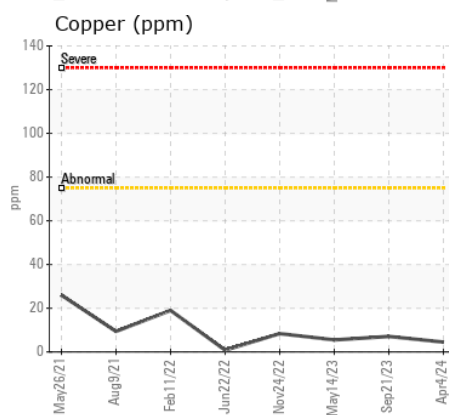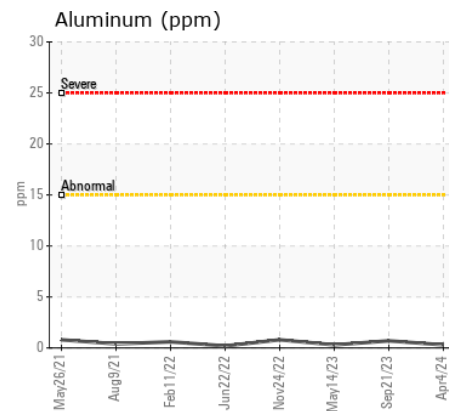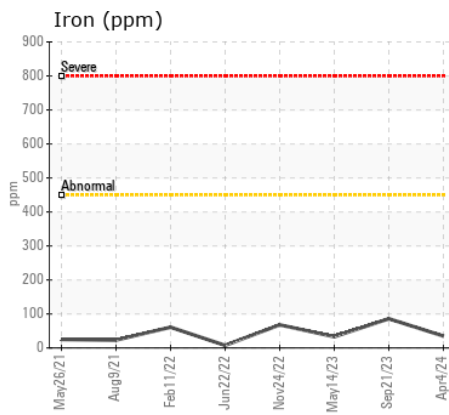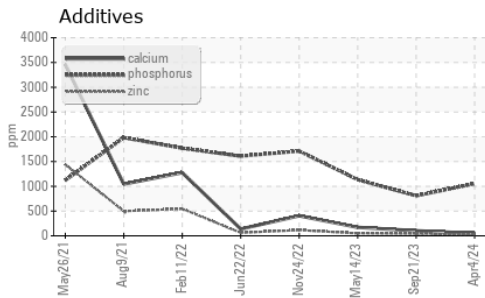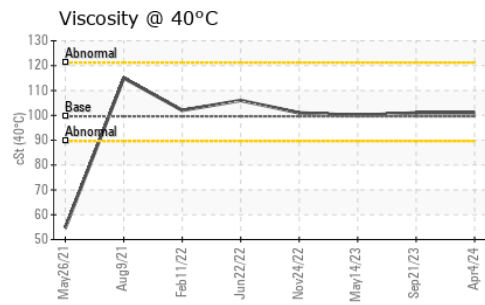

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0250456
Lab Number : 02631006
Unique Number : 5772159
Test Package : MOB 1
Received : 23 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

ABC RECYCLING
 8081 MEADOW AVE.
 BURNABY, BC
 CA V3N 2V9
 Contact: John Anderson
 john.anderson@abcrcycling.com
 T: (778)988-9944
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.