



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
OJ028374
 Component
Front Diesel Engine
 Fluid
SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0617259	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		300	---	---
Oil Age	hrs	Client Info		30	---	---
Filter Age	hrs	Client Info		30	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	4	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		85	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	3	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.9	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>57	4	---	---
Boron	ppm	ASTM D5185(m)		122	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		4	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		392	---	---
Calcium	ppm	ASTM D5185(m)		1771	---	---
Phosphorus	ppm	ASTM D5185(m)		990	---	---
Zinc	ppm	ASTM D5185(m)		1129	---	---
Sulfur	ppm	ASTM D5185(m)		3169	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		9.65	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.3	---	---

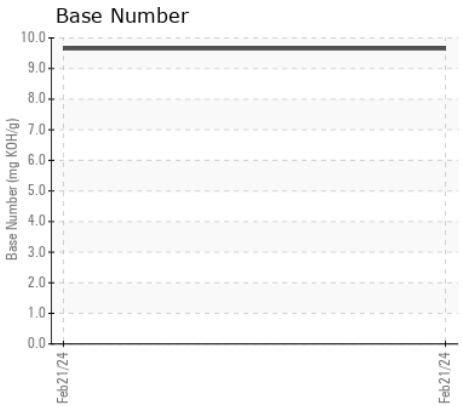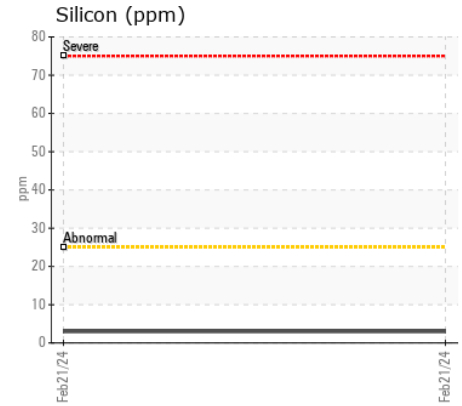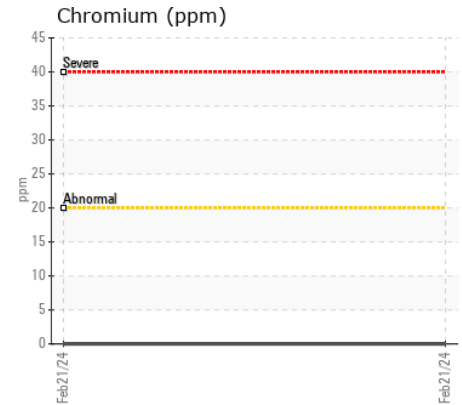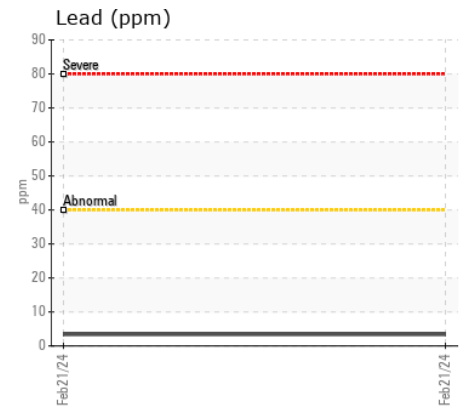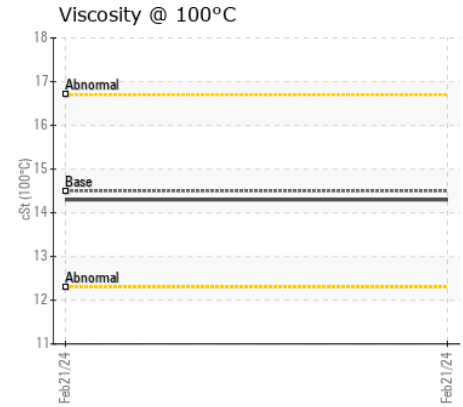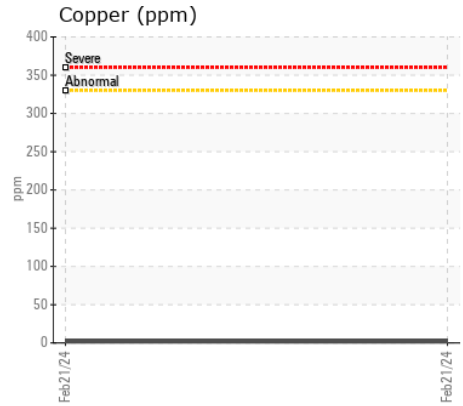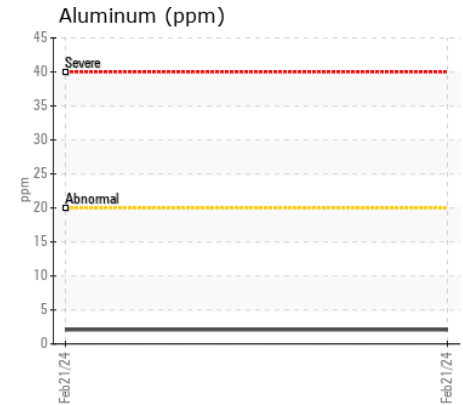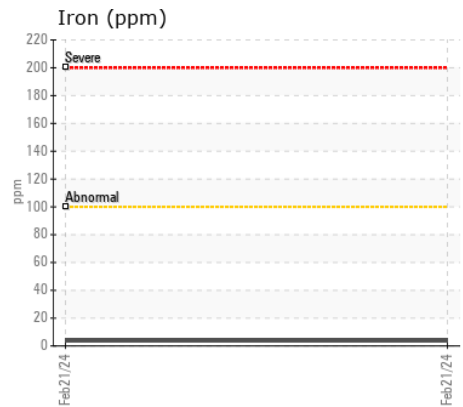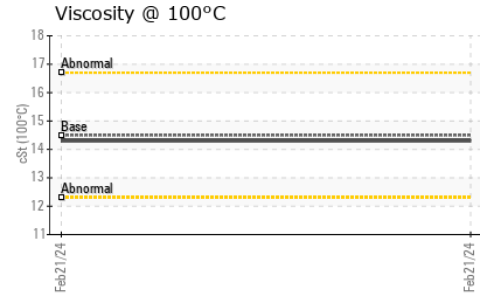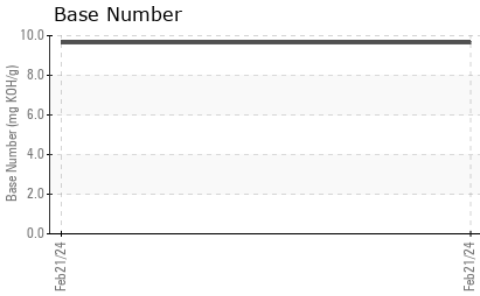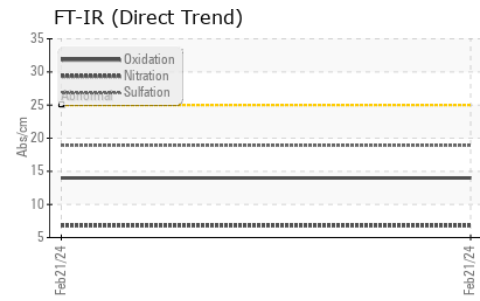

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0617259
Lab Number : 02631092
Unique Number : 5772245
Test Package : MOB 2

Received : 24 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GENREP LIMITED
 25 GIFFORD STREET
 NEPEAN, ON
 CA K2E 7S3
 Contact: Carmen Lavryssen
 servicedesk@genrep.com
 T: (613)225-9244
 F: (613)225-4690