



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
901099
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.
 Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096777	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	31	---	---
Chromium	ppm	ASTM D5185(m)	>20	3	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		2	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	4	---	---
Copper	ppm	ASTM D5185(m)	>330	4	---	---
Tin	ppm	ASTM D5185(m)	>15	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0.6	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.0	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>216	23	---	---
Boron	ppm	ASTM D5185(m)	250	4	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	63	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)	450	1013	---	---
Calcium	ppm	ASTM D5185(m)	3000	1124	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1029	---	---
Zinc	ppm	ASTM D5185(m)	1350	1228	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2505	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.7	---	---

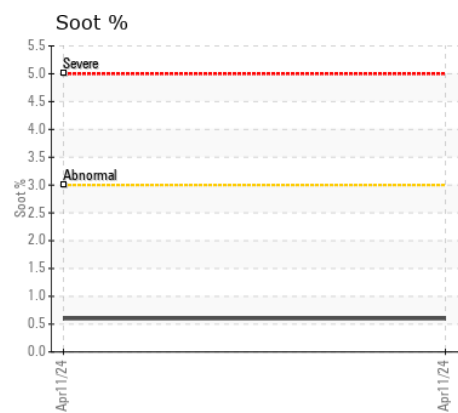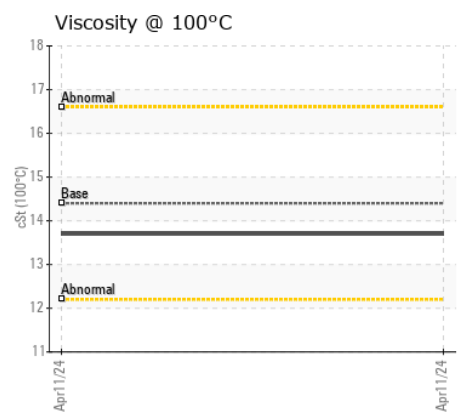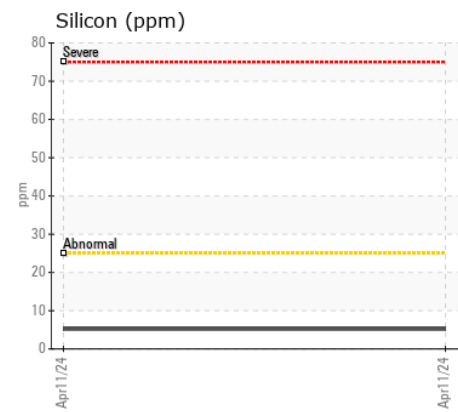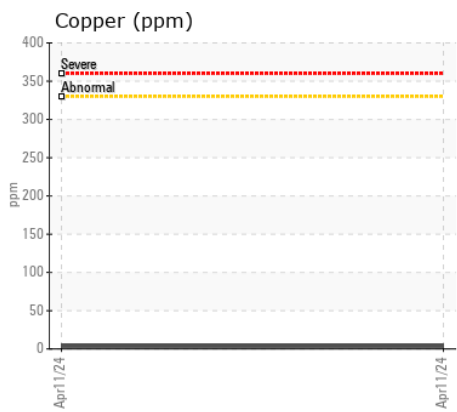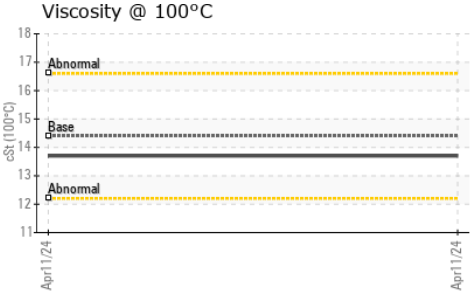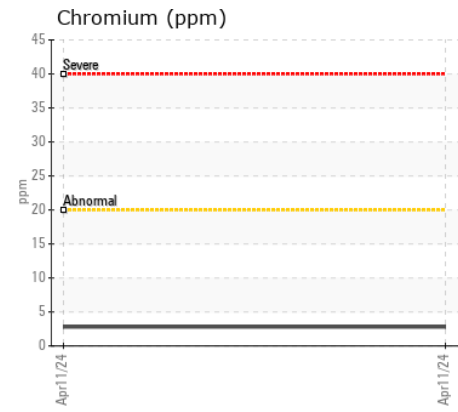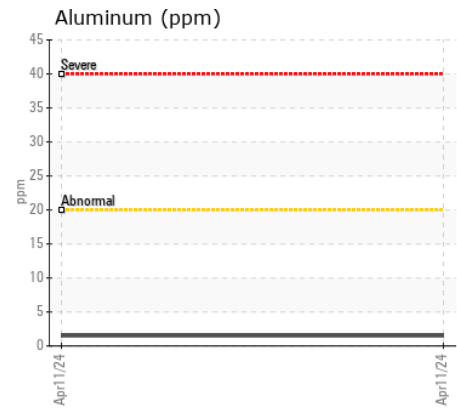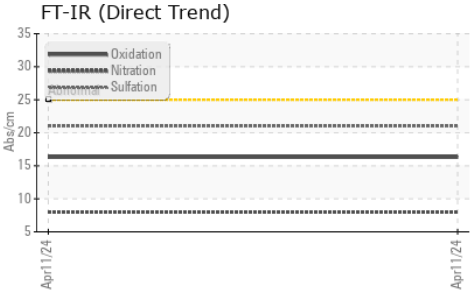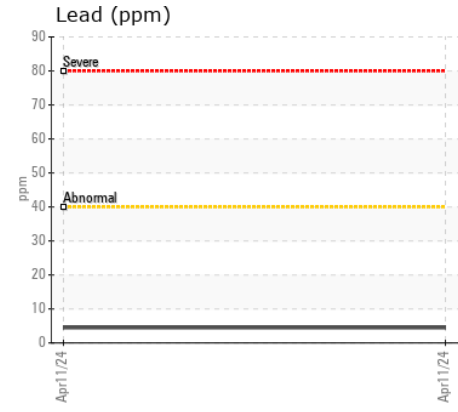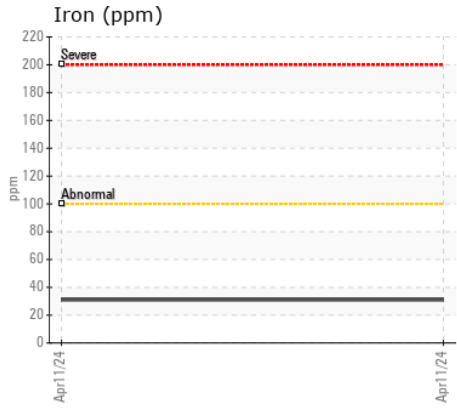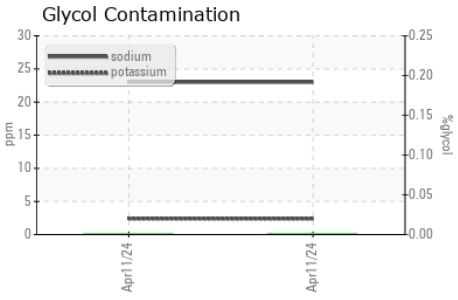

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096777 **Received** : 24 Apr 2024
Lab Number : 02631112 **Tested** : 25 Apr 2024
Unique Number : 5772265 **Diagnosed** : 25 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

GFL Environmental - 574 - Vancouver Fleet
 70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Sanjay Kisun
 skisun@gflenv.com
 T: (604)529-4030
 F: (604)529-4026

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.