



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
801126
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096771	---	---
Sample Date		Client Info		25 Mar 2024	---	---
Machine Age	hrs	Client Info		12295	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		1200	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	26	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	4	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	14	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.5	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		11	---	---
Boron	ppm	ASTM D5185(m)	50	16	---	---
Barium	ppm	ASTM D5185(m)	5	2	---	---
Molybdenum	ppm	ASTM D5185(m)	50	51	---	---
Manganese	ppm	ASTM D5185(m)	0	2	---	---
Magnesium	ppm	ASTM D5185(m)	560	544	---	---
Calcium	ppm	ASTM D5185(m)	1510	1556	---	---
Phosphorus	ppm	ASTM D5185(m)	780	697	---	---
Zinc	ppm	ASTM D5185(m)	870	889	---	---
Sulfur	ppm	ASTM D5185(m)	2040	1988	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.8	---	---

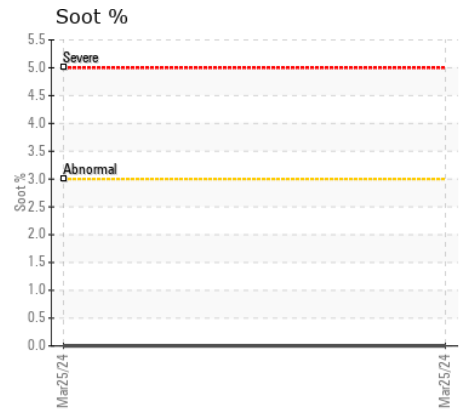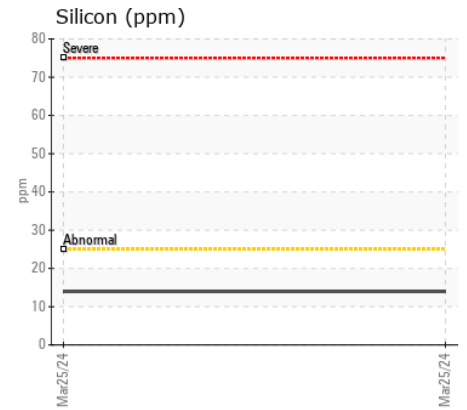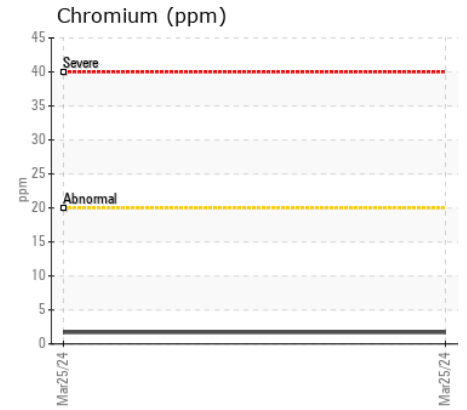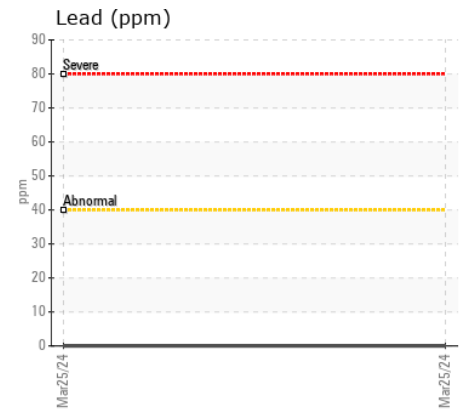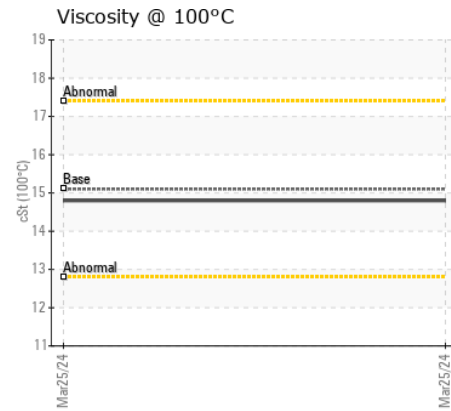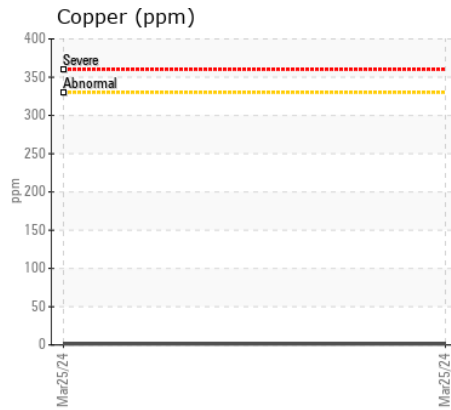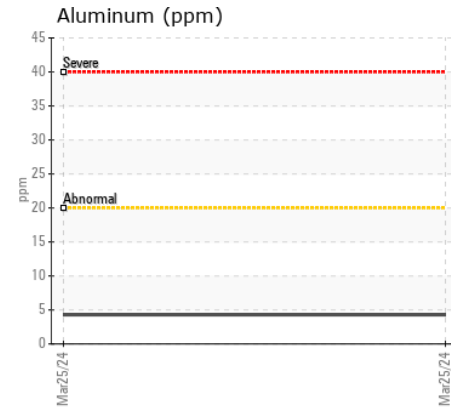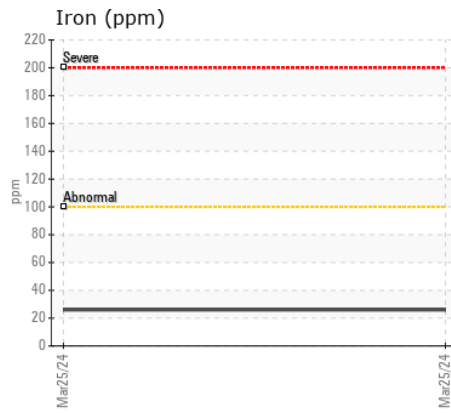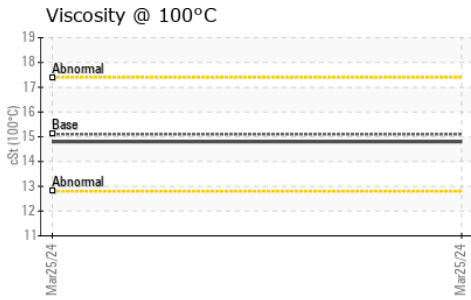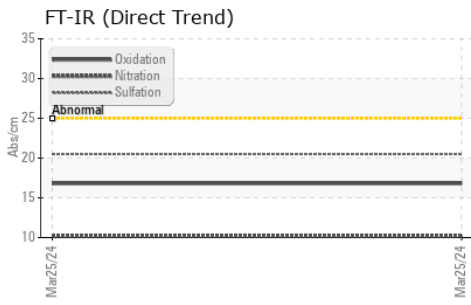

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096771
Lab Number : 02631114
Unique Number : 5772267
Test Package : MOB 1
Received : 24 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

GFL Environmental - 574 - Vancouver Fleet
 70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Sanjay Kisun
 skisun@gflenv.com
 T: (604)529-4030
 F: (604)529-4026

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.