

Machine Id  
**713072**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX MV 32 (--- GAL)**

**RECOMMENDATION**

Nous recommandons le remplacement des filtres de ce composant. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0114820</b>	GFL0114878	GFL0114916
Sample Date		Client Info		<b>19 Apr 2024</b>	16 Apr 2024	02 Apr 2024
Machine Age	kms	Client Info		<b>51419</b>	50976	49489
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	SEVERE	SEVERE

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>20	<b>5</b>	5	5
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>75	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








Il y a une quantité modérée de particules (de 4 à 14 microns) dans l'huile.

Silicon	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>▲ 38335</b>	▲ 52202	▲ 59352
Particles >6µm		ASTM D7647	>1300	<b>▲ 4255</b>	▲ 9691	▲ 6848
Particles >14µm		ASTM D7647	>160	<b>● 231</b>	▲ 551	● 235
Particles >21µm		ASTM D7647	>40	<b>55</b>	▲ 99	● 67
Particles >38µm		ASTM D7647	>10	<b>5</b>	4	9
Particles >71µm		ASTM D7647	>3	<b>1</b>	1	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 22/19/15</b>	▲ 23/20/16	▲ 23/20/15
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	3
Boron	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	0	<b>2</b>	2	2
Calcium	ppm	ASTM D5185(m)	50	<b>290</b>	291	297
Phosphorus	ppm	ASTM D5185(m)	330	<b>278</b>	276	273
Zinc	ppm	ASTM D5185(m)	430	<b>266</b>	271	257
Sulfur	ppm	ASTM D5185(m)	760	<b>899</b>	906	925
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	<b>30.5</b>	30.9	30.6

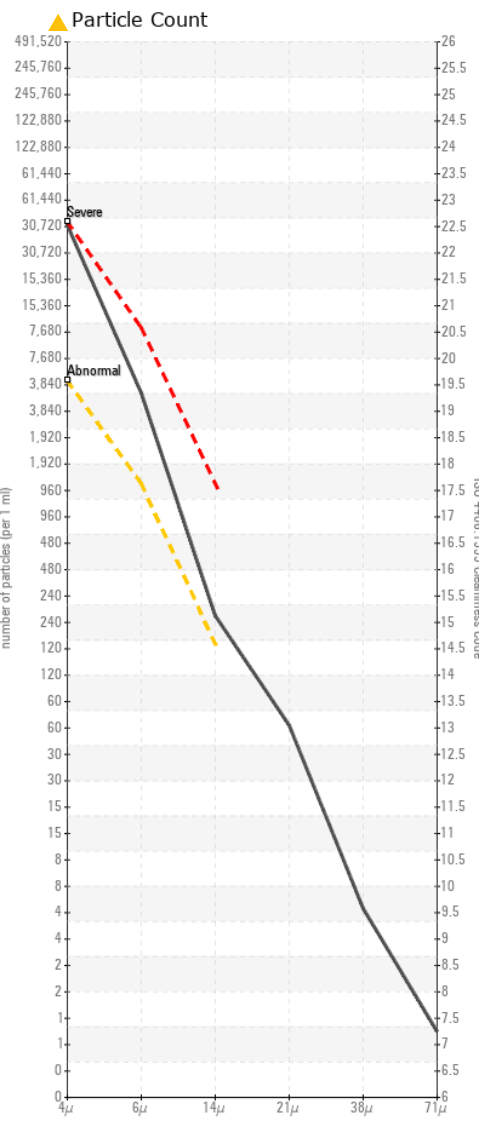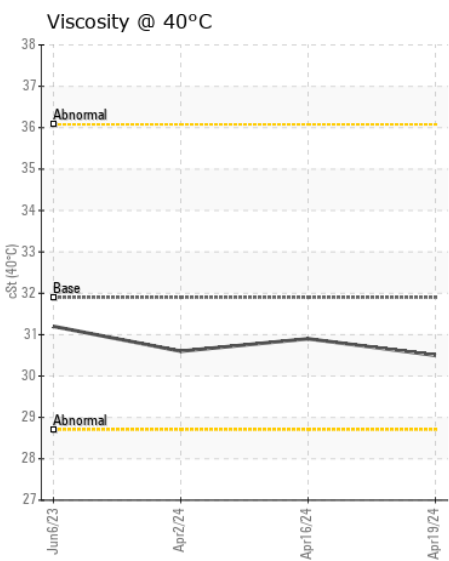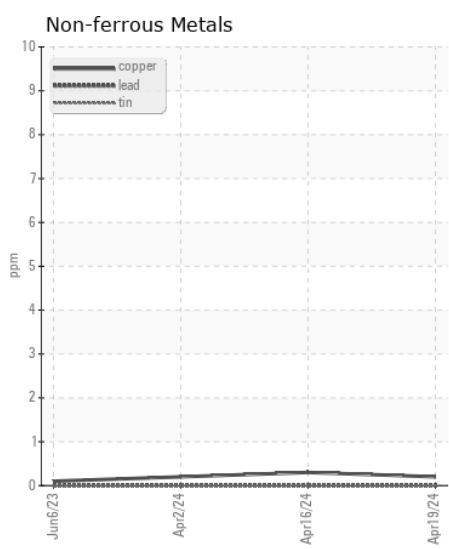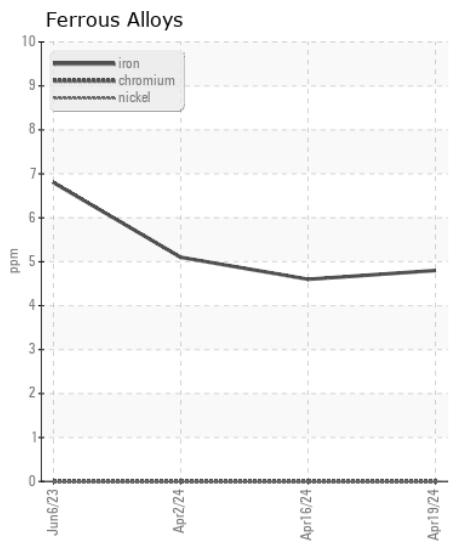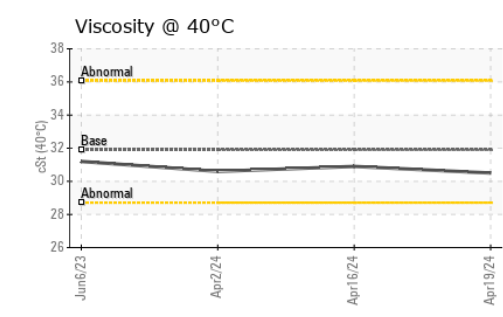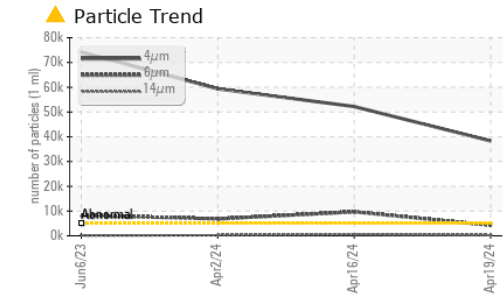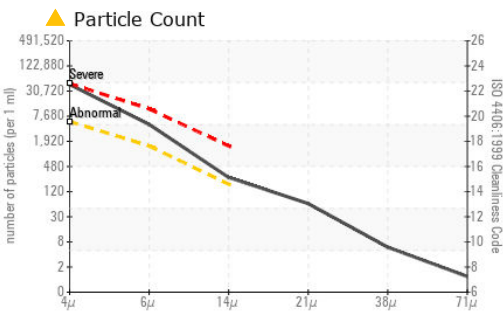

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0114820  
**Lab Number** : 02631190  
**Unique Number** : 5772343  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )  
**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**GFL Environmental - 780 - GMA - ICI - Solid Waste**  
 4365 boul. St-Elzear Ouest,  
 Laval, QC  
 CA H7P 4J3  
 Contact: Pieces Laval  
 pieces.laval@gflenv.com  
 T: (450)687-3838  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.