

Machine Id  
**7231**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

**WEAR**

Les taux d'usure de tous les composants sont normaux.











**CONTAMINATION**

Il n'y a aucun indice de contamination dans le fluide.

**FLUID CONDITION**

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0088183</b>	PC0075496	PC0073196
Sample Date		Client Info		<b>22 Apr 2024</b>	28 Aug 2023	15 May 2023
Machine Age	hrs	Client Info		<b>161304</b>	152387	147215
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>160	<b>41</b>	▲ 208	▲ 177
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>10</b>	▲ 56	47
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	7	4
Copper	ppm	ASTM D5185(m)	>225	<b>14</b>	46	43
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	4	4
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	10	9
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>2</b>	11	6
Boron	ppm	ASTM D5185(m)		<b>74</b>	86	96
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	2
Magnesium	ppm	ASTM D5185(m)		<b>1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>115</b>	61	58
Phosphorus	ppm	ASTM D5185(m)		<b>215</b>	268	291
Zinc	ppm	ASTM D5185(m)		<b>8</b>	18	16
Sulfur	ppm	ASTM D5185(m)		<b>1563</b>	691	693
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>34.3</b>	32.8	36.0
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	<b>6.7</b>	7	7
Viscosity Index (VI)	Scale	ASTM D2270*	155	<b>156</b>	182	159

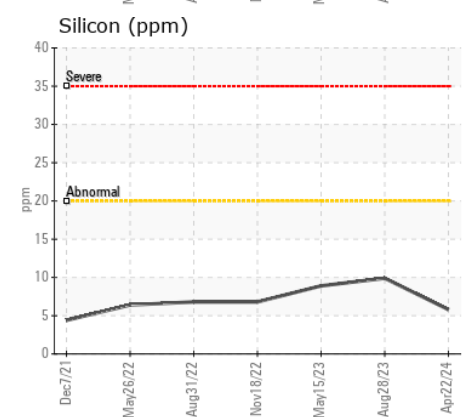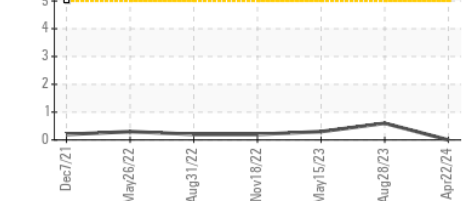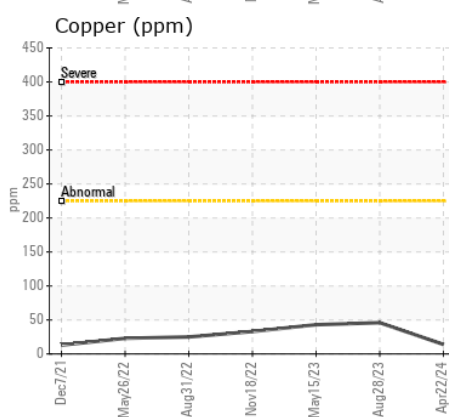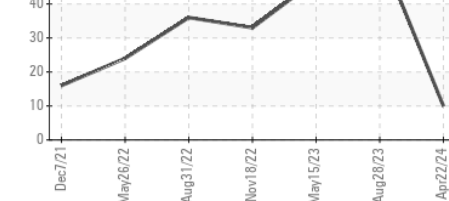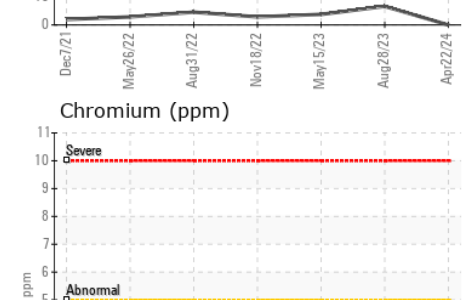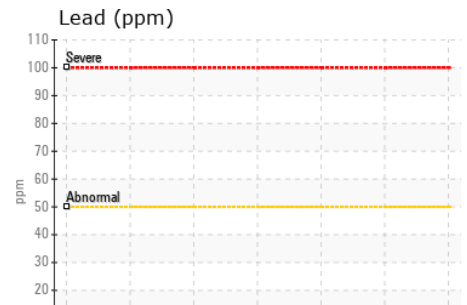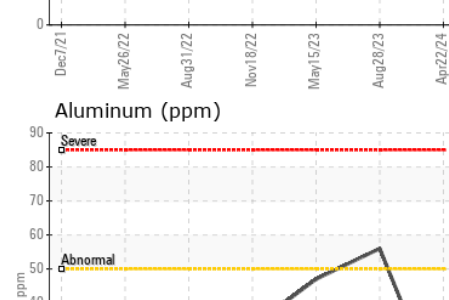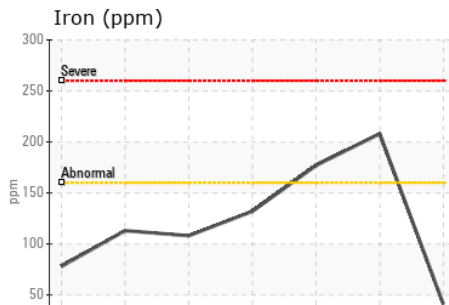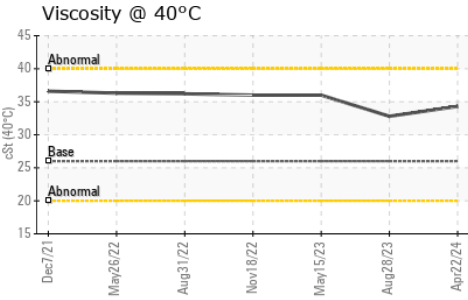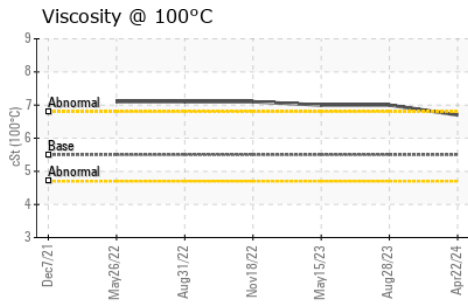

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0088183  
**Lab Number** : 02631204  
**Unique Number** : 5772357  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )  
**Received** : 24 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**GFL Environmental - 737 - Quebec City Hauling**  
 6205 Boul. Wilfrid Hamel,  
 Quebec City, QC  
 CA G2E 5G8  
 Contact: Dave Beaulieu  
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: