



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
370410/5726
 Component
Diesel Engine
 Fluid
 {not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0890770	---	---
Sample Date		Client Info		24 Apr 2024	---	---
Machine Age	hrs	Client Info		2055	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	13	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	11	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	3	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	8	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.6	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		51	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		118	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		629	---	---
Calcium	ppm	ASTM D5185(m)		1408	---	---
Phosphorus	ppm	ASTM D5185(m)		750	---	---
Zinc	ppm	ASTM D5185(m)		864	---	---
Sulfur	ppm	ASTM D5185(m)		2660	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		12.9	---	---

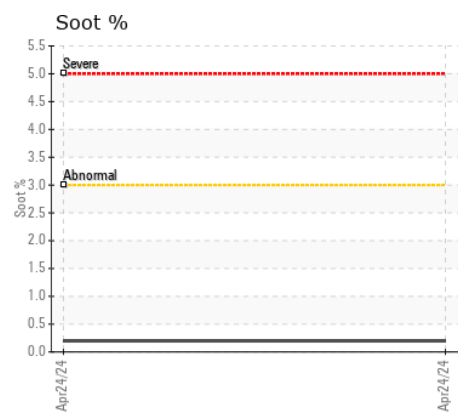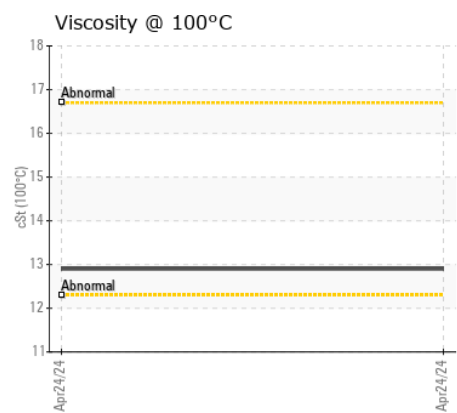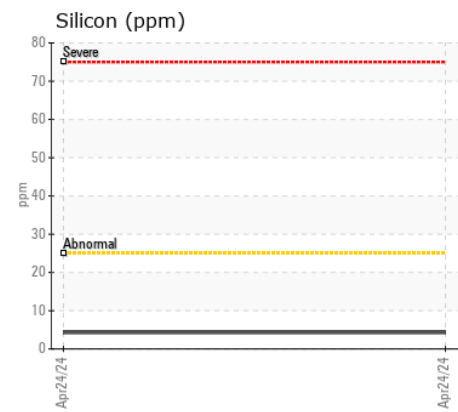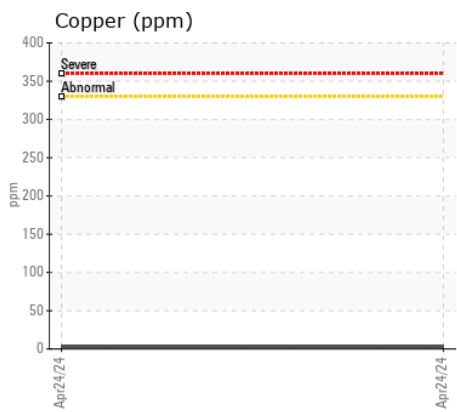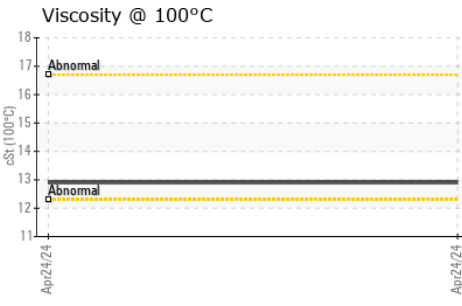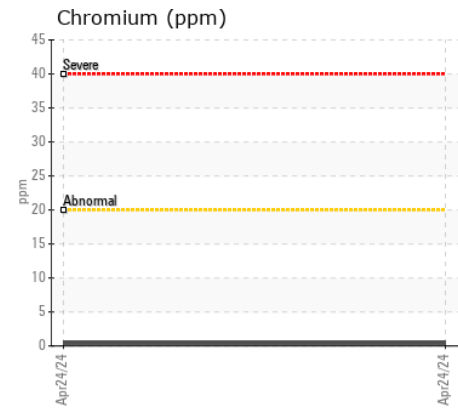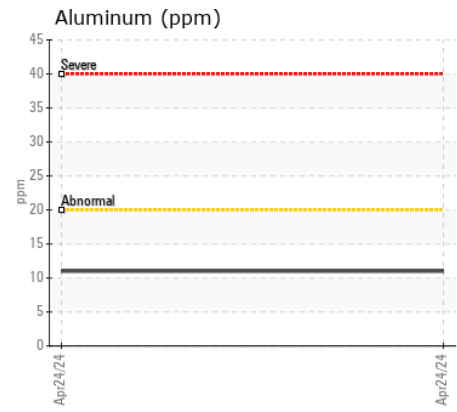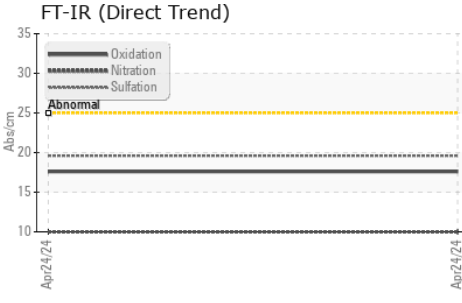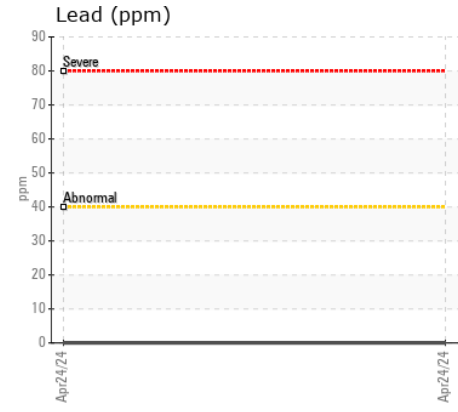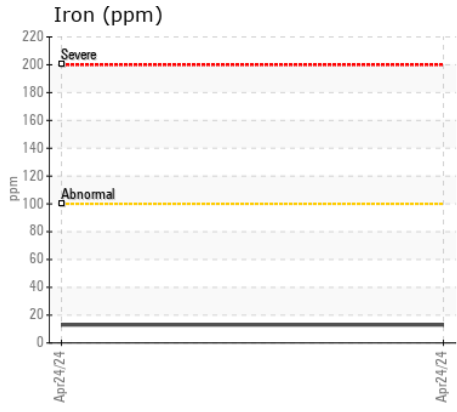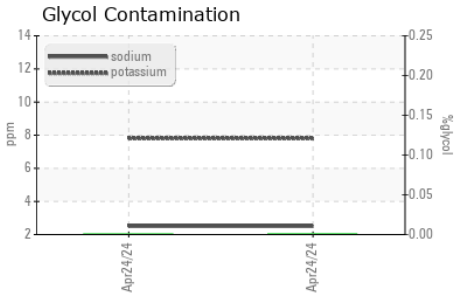

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0890770 **Received** : 25 Apr 2024
Lab Number : 02631267 **Tested** : 25 Apr 2024
Unique Number : 5772420 **Diagnosed** : 25 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

C.G. EQUIPMENT
 7367 Wellington Rd. 30, Unit A
 Guelph, ON
 CA N0M 2T0
 Contact: CG Equipment CG Guelph
 cory@cgequipment.com
 T: (519)826-0550
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.