



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Area
[8000402176]
 Machine Id
VOLVO A25G 752803
 Component
Diesel Engine
 Fluid
SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP391648	---	---
Sample Date		Client Info		23 Apr 2024	---	---
Machine Age	hrs	Client Info		442	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	29	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	1	---	---
Aluminum	ppm	ASTM D5185(m)	>25	3	---	---
Lead	ppm	ASTM D5185(m)	>40	8	---	---
Copper	ppm	ASTM D5185(m)	>330	356	---	---
Tin	ppm	ASTM D5185(m)	>15	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	37	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Fuel	%	ASTM D7593*	>6.0	0.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	5	---	---
Boron	ppm	ASTM D5185(m)		40	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		81	---	---
Manganese	ppm	ASTM D5185(m)		5	---	---
Magnesium	ppm	ASTM D5185(m)		12	---	---
Calcium	ppm	ASTM D5185(m)		2202	---	---
Phosphorus	ppm	ASTM D5185(m)		996	---	---
Zinc	ppm	ASTM D5185(m)		1147	---	---
Sulfur	ppm	ASTM D5185(m)		3273	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	▲ 10.9	---	---

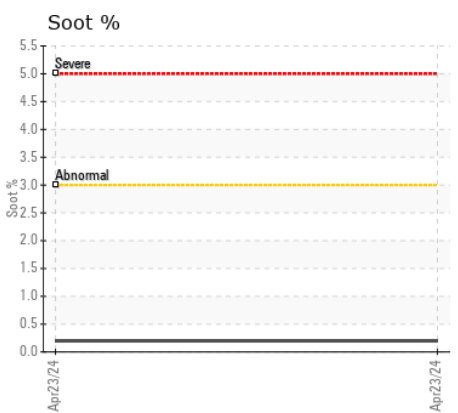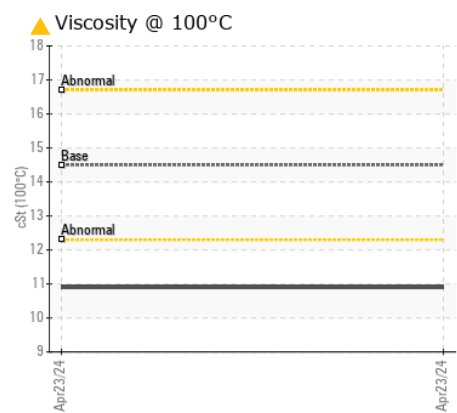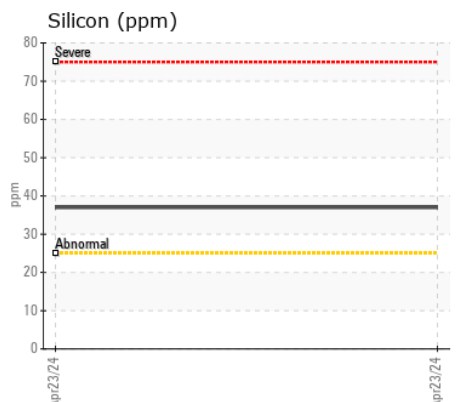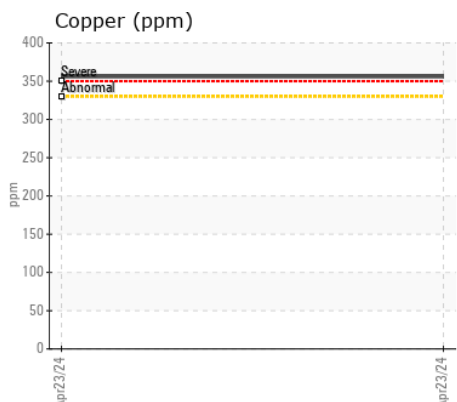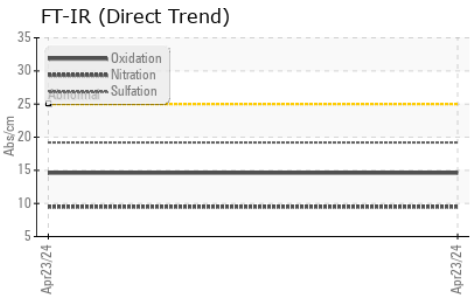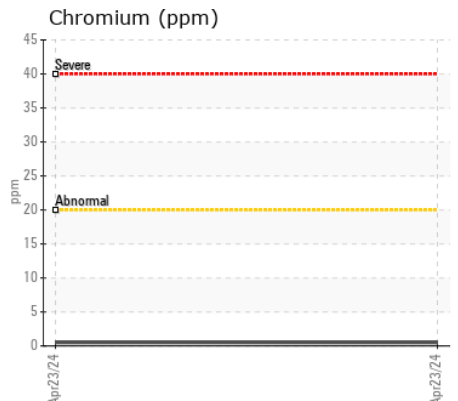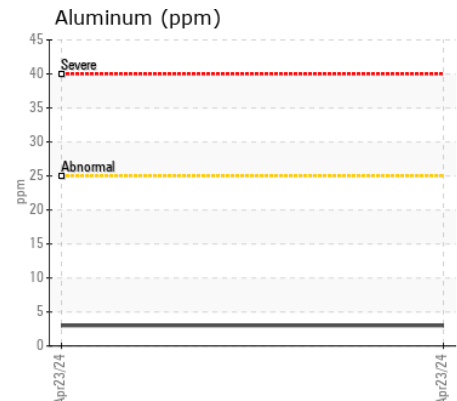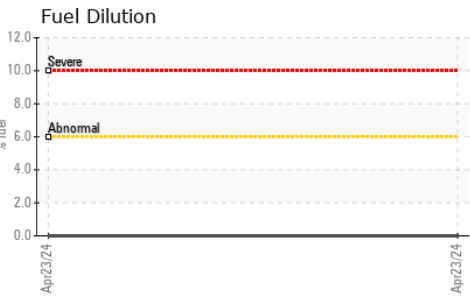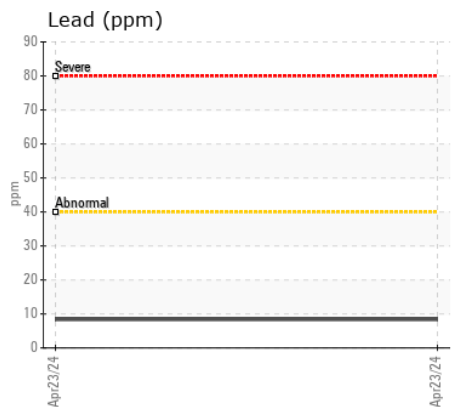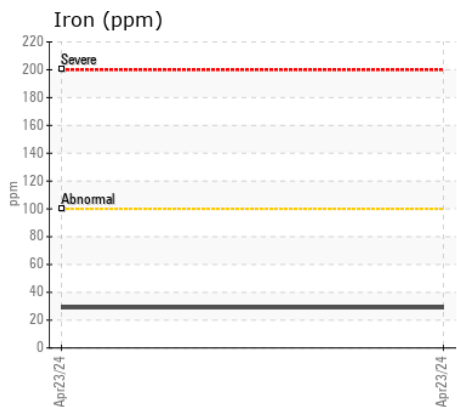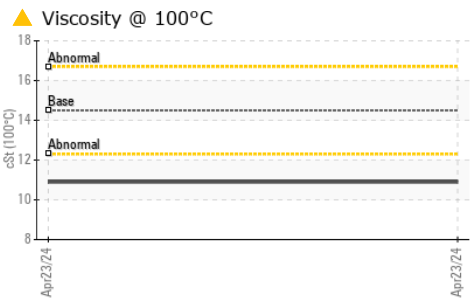

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP391648 **Received** : 25 Apr 2024
Lab Number : 02631271 **Tested** : 26 Apr 2024
Unique Number : 5772424 **Diagnosed** : 26 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FUELDILUTION, PercentFuel)

STRONGCO EQUIPMENT INC.
 55 ISNOR DRIVE, BURNSIDE INDUSTRIALPARK
 DARTMOUTH, NS
 CA B3B 1N6
 Contact: Lindsay Downs
 ldowns@strongco.com
 T: (902)468-5010
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.