



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CROISIERES LACHANCE [6100271121]

Machine Id
5JM426
Component
Transmission (Manual)
Fluid
SAE 30W (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0021539	WA0019732	---
Sample Date		Client Info		17 Apr 2024	27 Apr 2023	---
Machine Age	hrs	Client Info		11476	11476	---
Oil Age	hrs	Client Info		800	400	---
Filter Age	hrs	Client Info		800	400	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>200	22	18	---
Chromium	ppm	ASTM D5185(m)	>5	<1	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	0	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>7	0	0	---
Aluminum	ppm	ASTM D5185(m)	>25	2	1	---
Lead	ppm	ASTM D5185(m)	>45	9	6	---
Copper	ppm	ASTM D5185(m)	>225	7	5	---
Tin	ppm	ASTM D5185(m)	>10	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION













Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>125	6	5	---
Potassium	ppm	ASTM D5185(m)	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*		4.4	---	---
Sulfation	Abs/.1mm	ASTM D7415*		16.6	---	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

Le AN est acceptable pour ce fluide. L'état de le fluide permet d'en prolonger l'utilisation.

Sodium	ppm	ASTM D5185(m)		1	1	---
Boron	ppm	ASTM D5185(m)		2	2	---
Barium	ppm	ASTM D5185(m)		<1	0	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)		19	17	---
Calcium	ppm	ASTM D5185(m)		3226	3380	---
Phosphorus	ppm	ASTM D5185(m)		1078	1170	---
Zinc	ppm	ASTM D5185(m)		1263	1272	---
Sulfur	ppm	ASTM D5185(m)		9952	10140	---
Oxidation	Abs/.1mm	ASTM D7414*		3.3	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		2.23	2.42	---
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	93.7	94.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.5	11.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	109	102	---	---

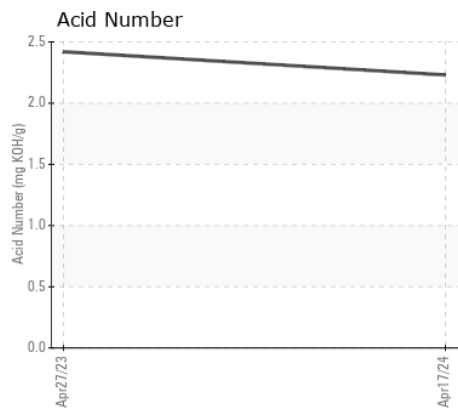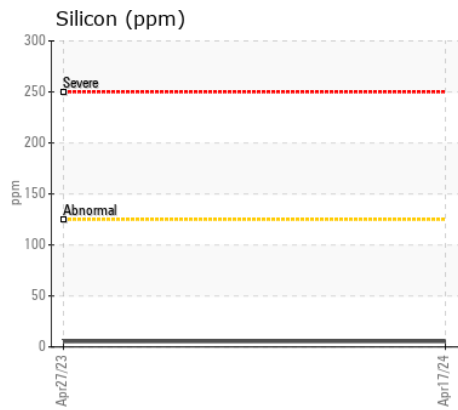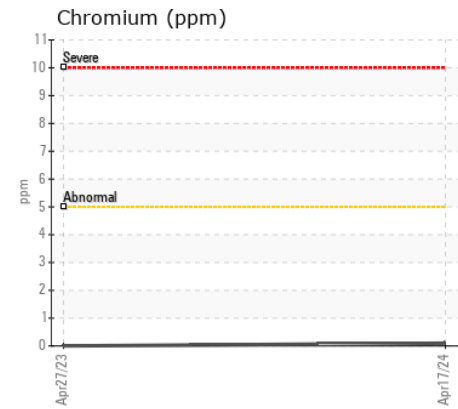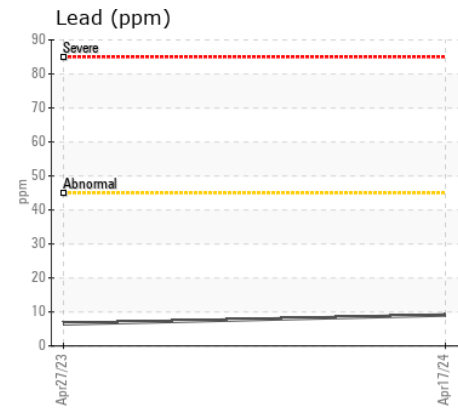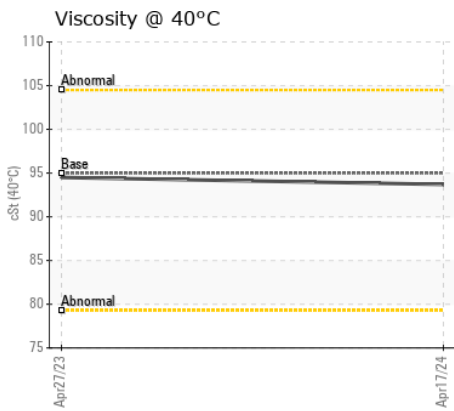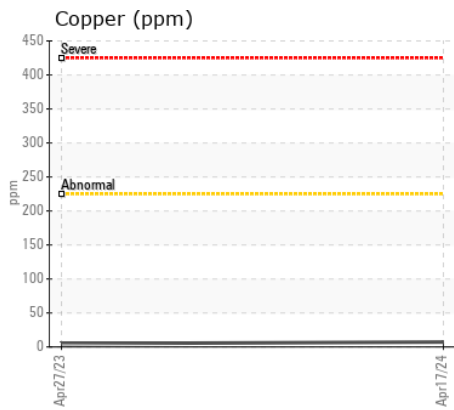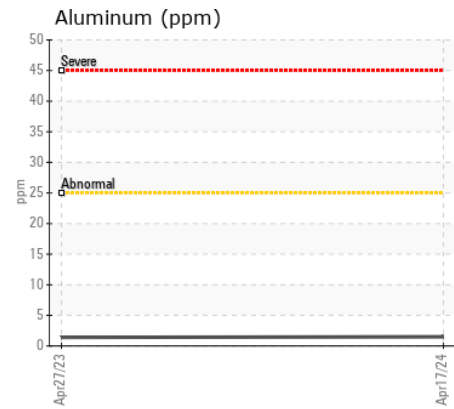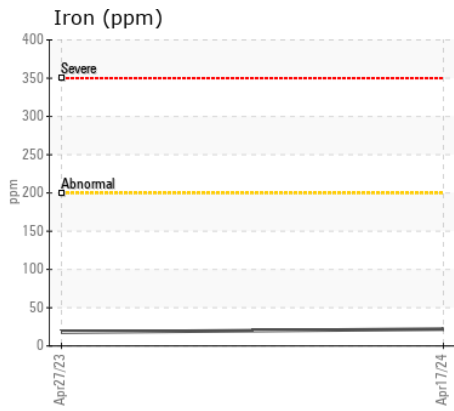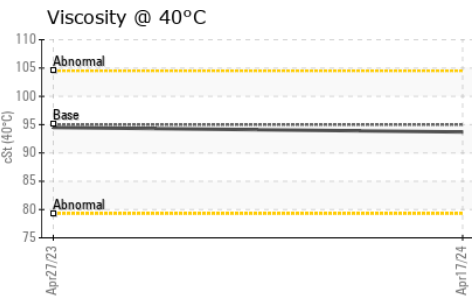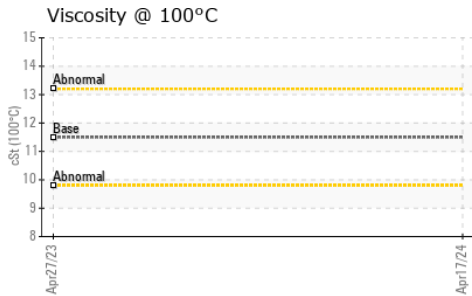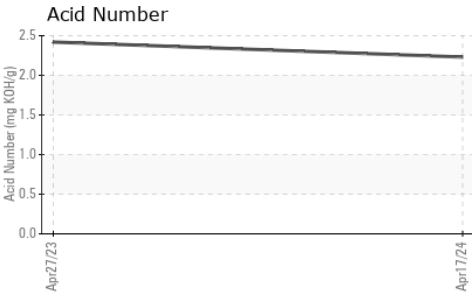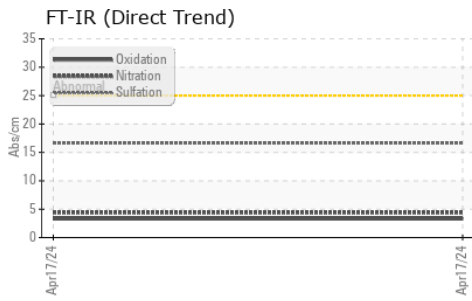

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0021539 **Received** : 25 Apr 2024
Lab Number : 02631307 **Tested** : 25 Apr 2024
Unique Number : 5772460 **Diagnosed** : 25 Apr 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: FT-IR, KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Wajax Limited
 2997 AV. WATT
 Quebec, QC
 CA G1X 3W1
 Contact: Steve Racine
 sracine@wajax.com
 T:
 F: (418)651-4448