



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[401372]**

Machine Id  
**16-8003**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP430072</b>	VCP393831	VCP394795
Sample Date		Client Info		<b>24 Apr 2024</b>	18 Jan 2024	29 Oct 2023
Machine Age	hrs	Client Info		<b>21500</b>	21000	20492
Oil Age	hrs	Client Info		<b>500</b>	500	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>8</b>	9	12
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	1
Copper	ppm	ASTM D5185(m)	>15	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>4</b>	4	7
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.6</b>	0.6	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.3</b>	7.8	8.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.0</b>	23.5	24.2
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	3
Boron	ppm	ASTM D5185(m)	2.5	<b>32</b>	26	19
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0.7	<b>40</b>	40	40
Manganese	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	256	<b>507</b>	501	499
Calcium	ppm	ASTM D5185(m)	2057	<b>1692</b>	1718	1714
Phosphorus	ppm	ASTM D5185(m)	935	<b>895</b>	920	893
Zinc	ppm	ASTM D5185(m)	1223	<b>1058</b>	1063	1067
Sulfur	ppm	ASTM D5185(m)	4079	<b>2352</b>	2512	2289
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.6</b>	20.1	20.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	<b>13.4</b>	13.0	13.1

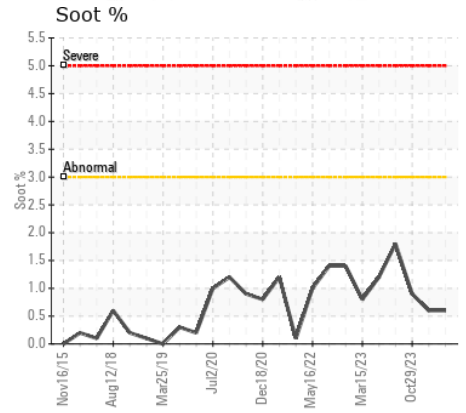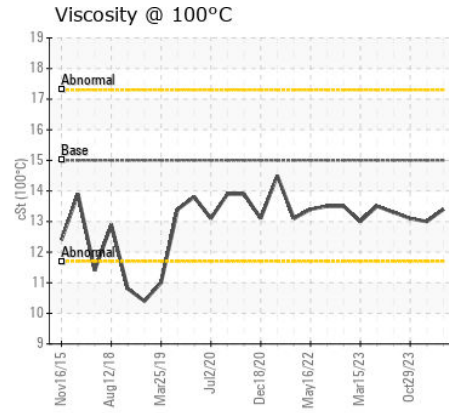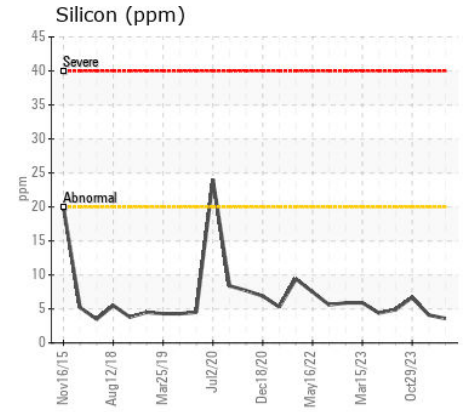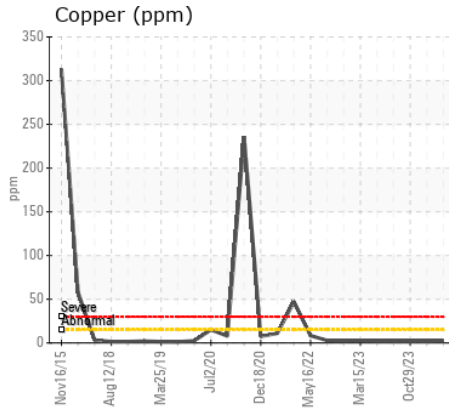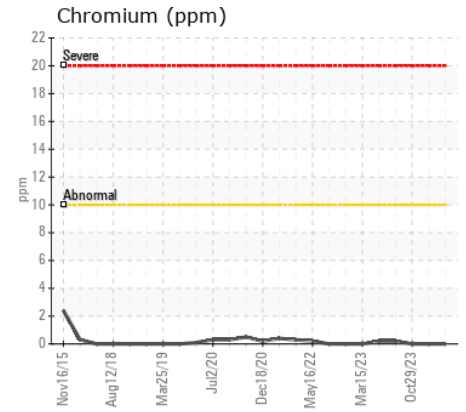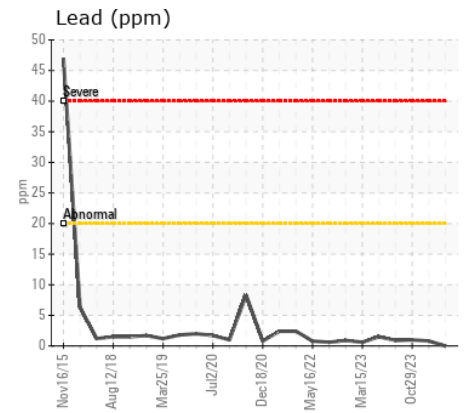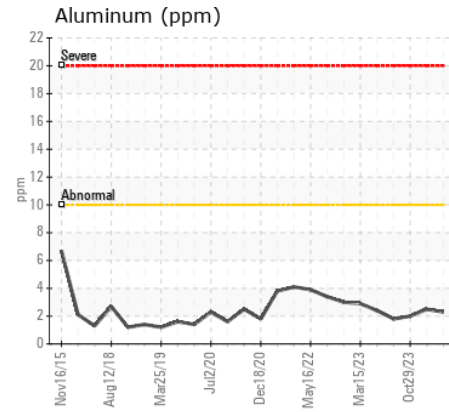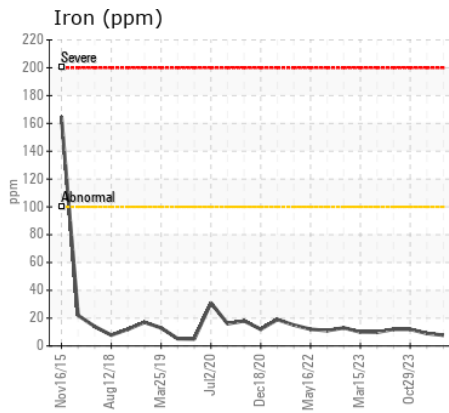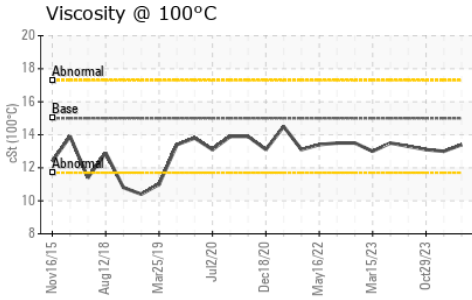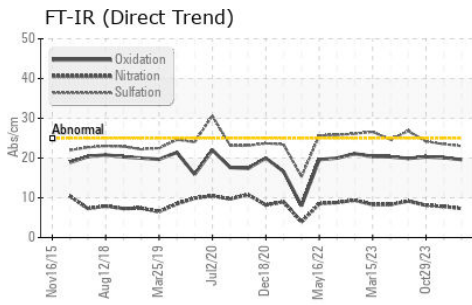

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP430072  
**Lab Number** : 02631311  
**Unique Number** : 5772464  
**Test Package** : MOB 1  
**Received** : 25 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**CRH CANADA GROUP INC.**  
 P.O. BOX 5400  
 CONCORD, ON  
 CA L4K 1B6  
 Contact: Dan Brown  
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.