



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[402213]

Machine Id
16-8019

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP352984	VCP448079	VCP381535
Sample Date		Client Info		23 Apr 2024	05 Apr 2024	29 Oct 2023
Machine Age	hrs	Client Info		11549	11500	11000
Oil Age	hrs	Client Info		3500	3500	3000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

PQ		ASTM D8184*	>60	0	0	0
Iron	ppm	ASTM D5185(m)	>140	▲ 204	▲ 205	▲ 181
Chromium	ppm	ASTM D5185(m)	>2	1	1	1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	1	1	1
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>100	5	5	4
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185(m)	>20	3	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION


Additive levels indicate the addition of a different brand, or type of fluid. The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	187	79	80	77
Barium	ppm	ASTM D5185(m)	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0.0	4	4	3
Magnesium	ppm	ASTM D5185(m)	6.8	<1	1	<1
Calcium	ppm	ASTM D5185(m)	215	70	71	72
Phosphorus	ppm	ASTM D5185(m)	445	190	191	195
Zinc	ppm	ASTM D5185(m)	56	17	17	16
Sulfur	ppm	ASTM D5185(m)	1336	1656	1686	1654
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	27.5	27.4	27.5


▲ Ferrous Alloys

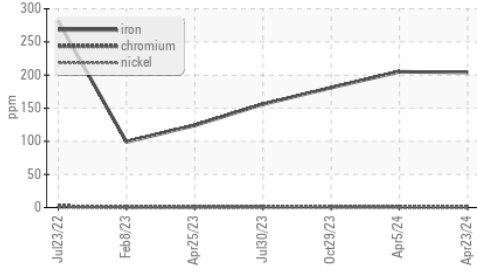


▲ Iron (ppm)

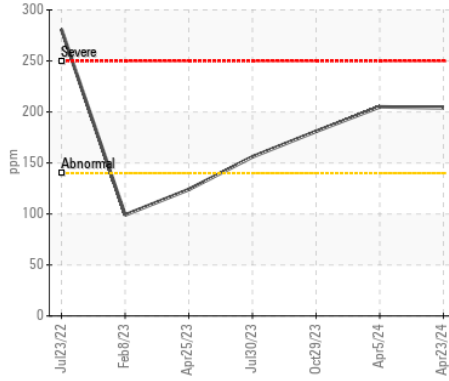


Lead (ppm)

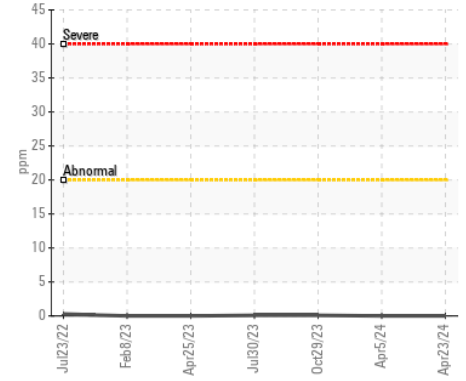


Viscosity @ 40°C

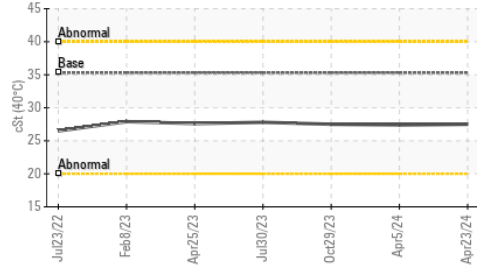


Aluminum (ppm)

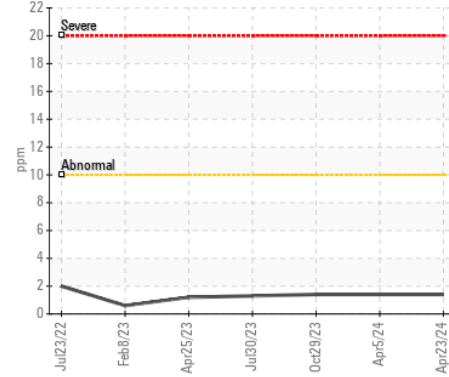


Chromium (ppm)

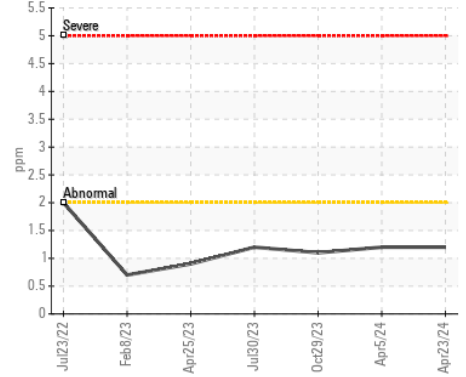


PQ

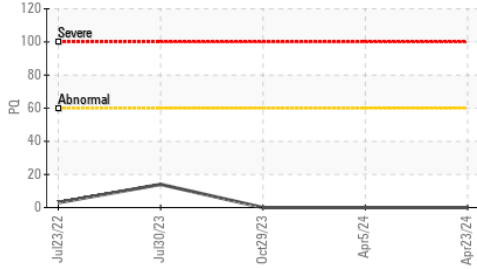


Copper (ppm)

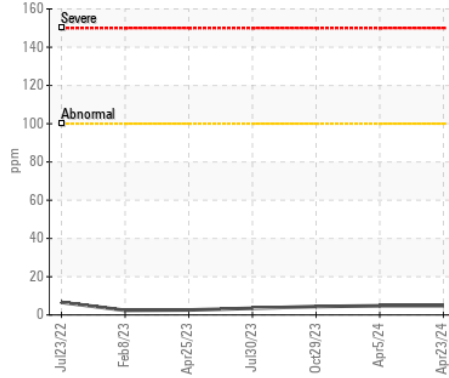


Silicon (ppm)

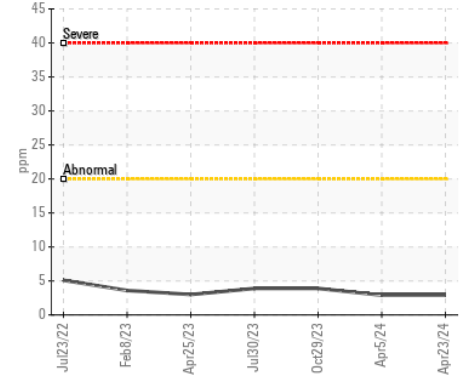


Additives

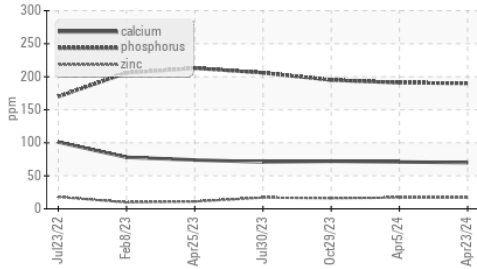

Viscosity @ 40°C

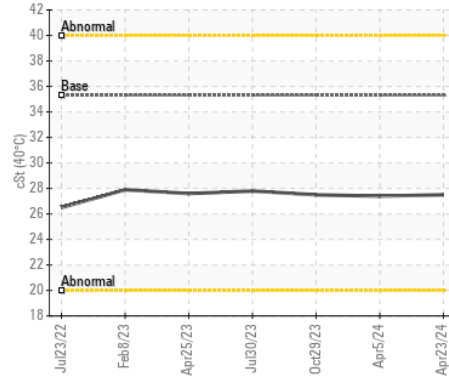

PQ

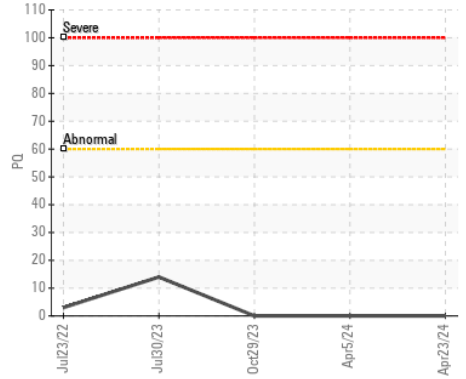

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : VCP352984

Lab Number : 02631359

Unique Number : 5772512

Test Package : MOB 1 (Additional Tests: PQ)

Received : 25 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 26 Apr 2024 - Kevin Marson

CRH CANADA GROUP INC.

P.O. BOX 5400

CONCORD, ON

CA L4K 1B6

Contact: Dan Brown

dan.brown@ca.crh.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.