



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**370410/5726**  
 Component  
**Front Left Wheel Hub**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0890772	---	---
Sample Date		Client Info		22 Apr 2024	---	---
Machine Age	hrs	Client Info		2055	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>500	83	---	---
Chromium	ppm	ASTM D5185(m)	>8	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	---	---
Lead	ppm	ASTM D5185(m)	>5	0	---	---
Copper	ppm	ASTM D5185(m)	>50	16	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>25	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)	>170	5	---	---
Boron	ppm	ASTM D5185(m)	400	61	---	---
Barium	ppm	ASTM D5185(m)	200	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)	12	118	---	---
Calcium	ppm	ASTM D5185(m)	150	13	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	2196	---	---
Zinc	ppm	ASTM D5185(m)	125	20	---	---
Sulfur	ppm	ASTM D5185(m)	22500	21573	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	145	---	---

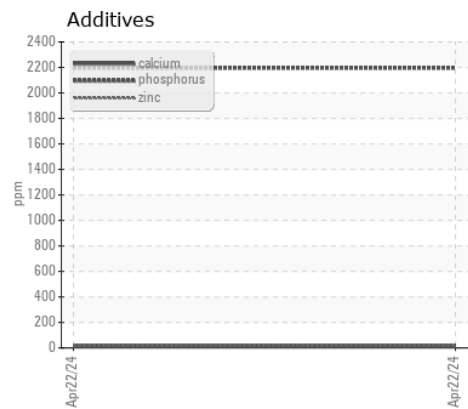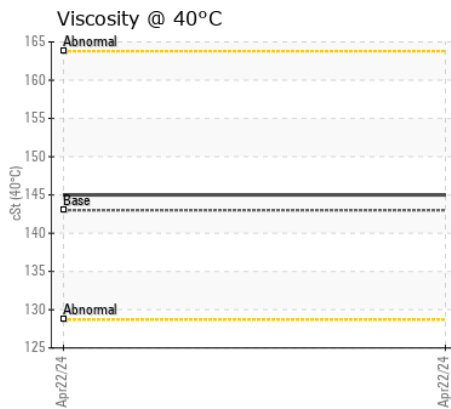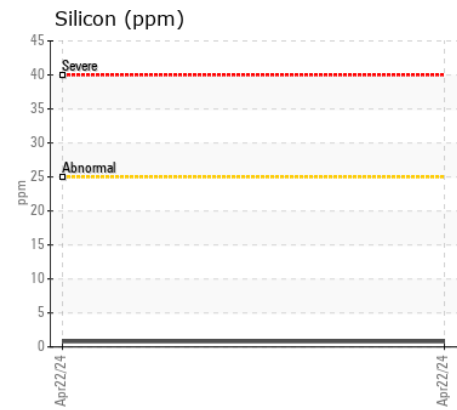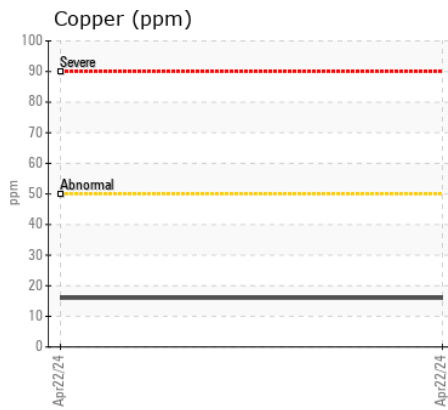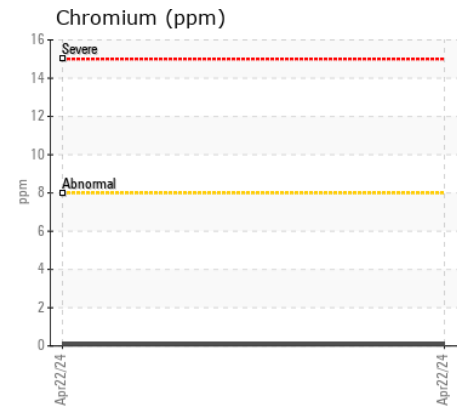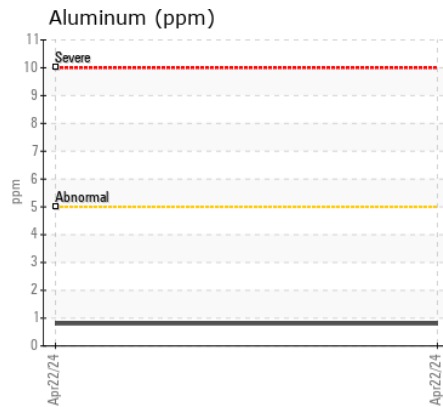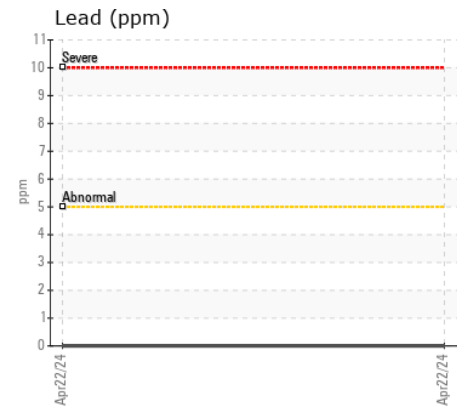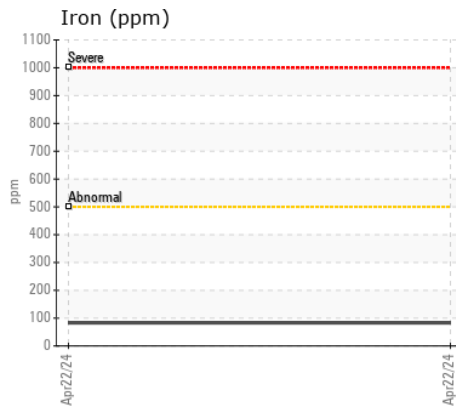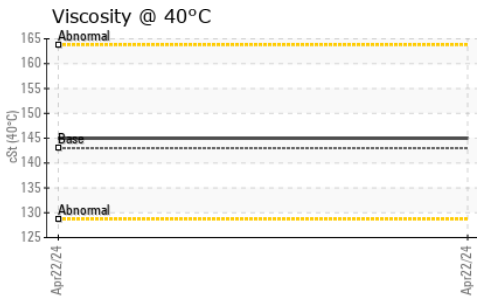

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0890772  
**Lab Number** : 02631376  
**Unique Number** : 5772529  
**Test Package** : MOB 1  
**Received** : 25 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**C.G. EQUIPMENT**  
 7367 Wellington Rd. 30, Unit A  
 Guelph, ON  
 CA N0M 2T0  
 Contact: CG Equipment CG Guelph  
 cory@cgequipment.com  
 T: (519)826-0550  
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.