



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
370410/5726

Component
Transmission (Manual)

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0890771	---	---
Sample Date		Client Info		22 Apr 2024	---	---
Machine Age	hrs	Client Info		2055	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>200	14	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	0	---	---
Lead	ppm	ASTM D5185(m)	>45	0	---	---
Copper	ppm	ASTM D5185(m)	>225	17	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>125	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>170	3	---	---
Boron	ppm	ASTM D5185(m)	400	19	---	---
Barium	ppm	ASTM D5185(m)	200	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)	12	33	---	---
Calcium	ppm	ASTM D5185(m)	150	11	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	2331	---	---
Zinc	ppm	ASTM D5185(m)	125	8	---	---
Sulfur	ppm	ASTM D5185(m)	22500	21970	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	140	---	---

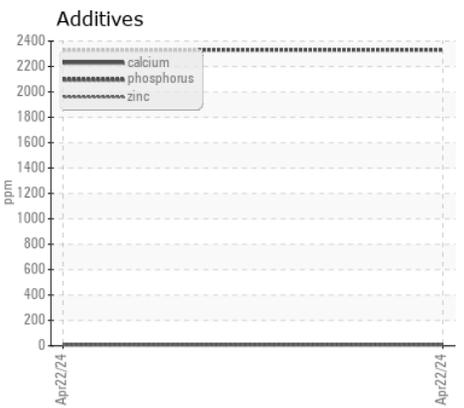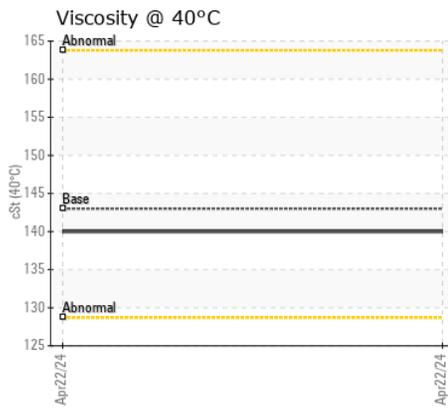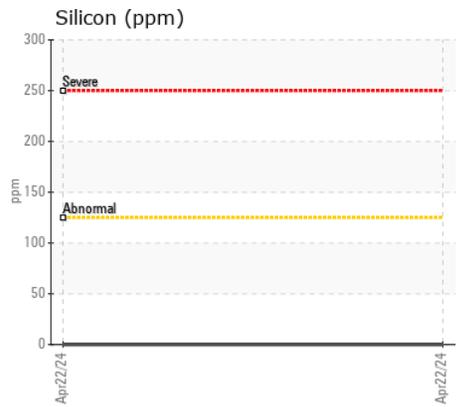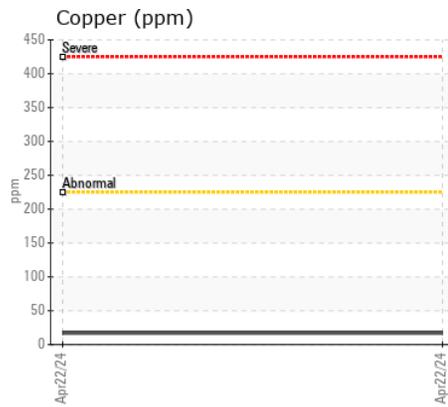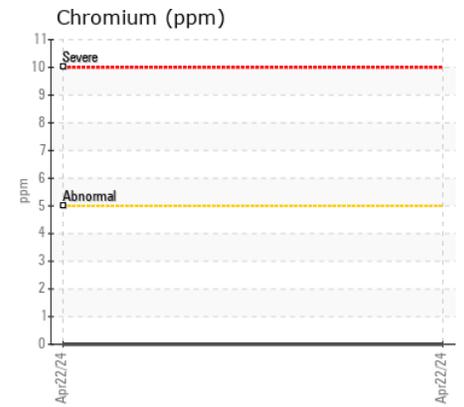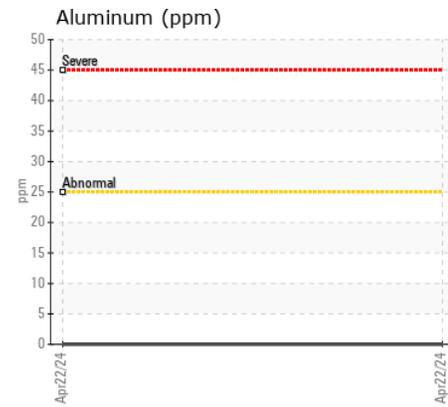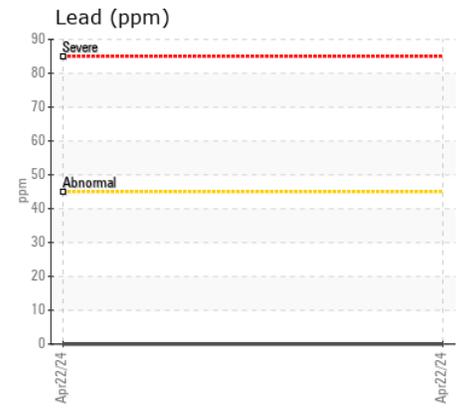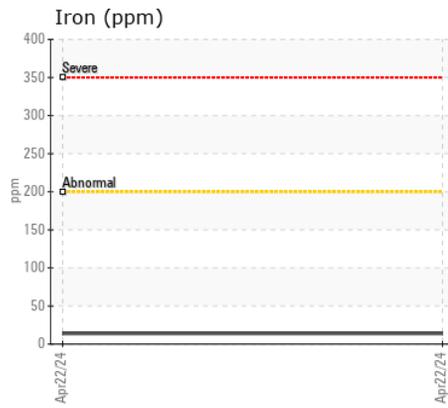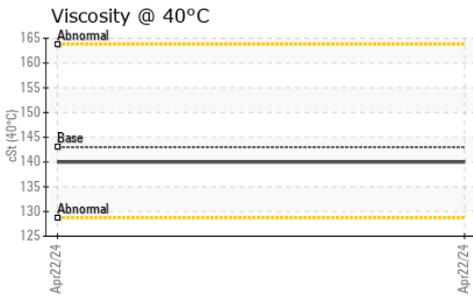

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0890771 **Received** : 25 Apr 2024
Lab Number : 02631380 **Tested** : 25 Apr 2024
Unique Number : 5772533 **Diagnosed** : 25 Apr 2024 - Wes Davis
Test Package : MOB 1

C.G. EQUIPMENT
 7367 Wellington Rd. 30, Unit A
 Guelph, ON
 CA N0M 2T0
 Contact: CG Equipment CG Guelph
 cory@cgequipment.com
 T: (519)826-0550
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.