



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**370410/5726**

Component  
**Rear Axle**

Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0890768</b>	---	---
Sample Date		Client Info		<b>24 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2055</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
Iron	ppm	ASTM D5185(m)	>500	<b>17</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>50	<b>6</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185(m)	>75	<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185(m)	>170	<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)	400	<b>18</b>	---	---
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	12	<b>28</b>	---	---
Calcium	ppm	ASTM D5185(m)	150	<b>8</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	<b>2225</b>	---	---
Zinc	ppm	ASTM D5185(m)	125	<b>9</b>	---	---
Sulfur	ppm	ASTM D5185(m)	22500	<b>21455</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	<b>142</b>	---	---

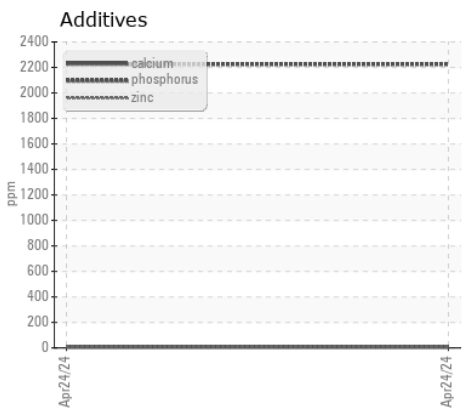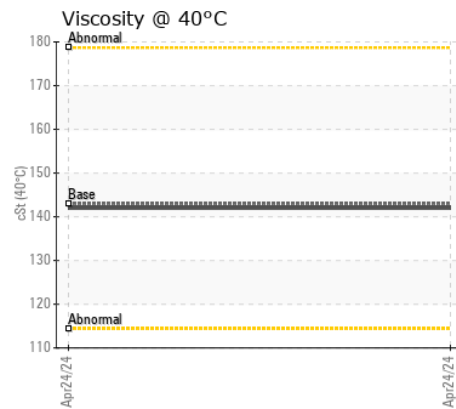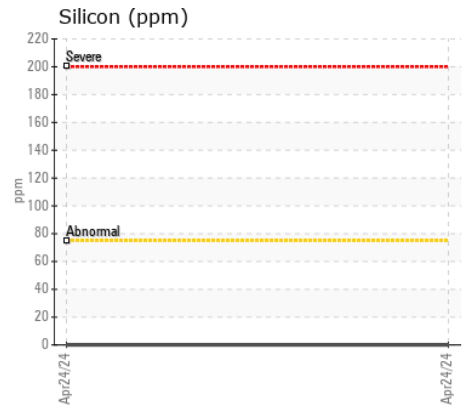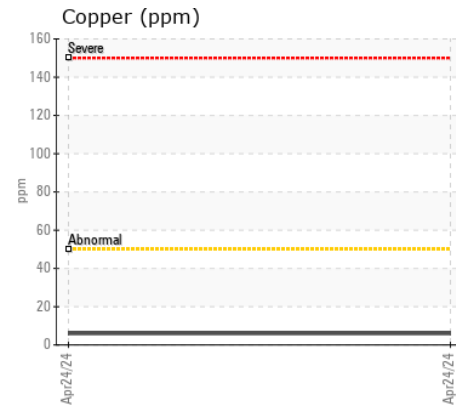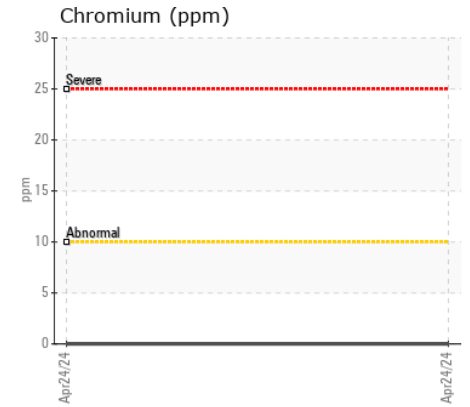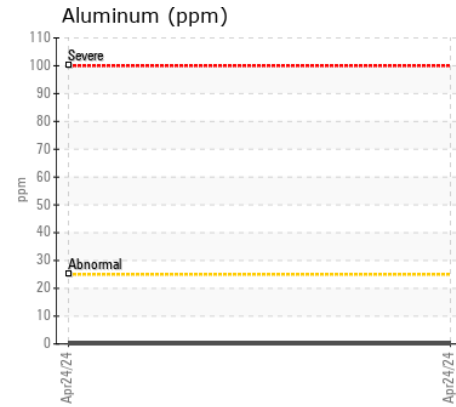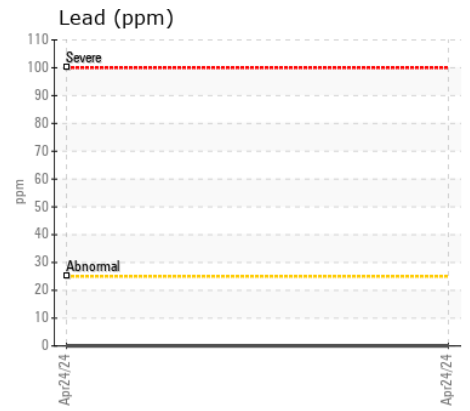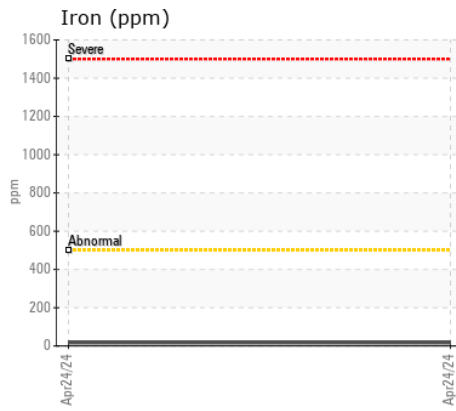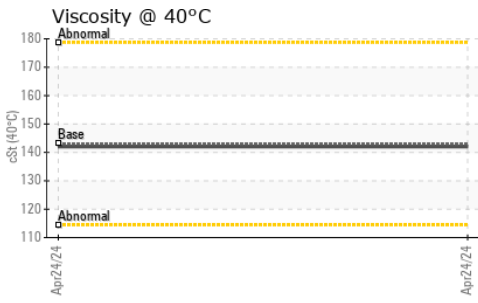

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0890768 **Received** : 25 Apr 2024  
**Lab Number** : 02631381 **Tested** : 25 Apr 2024  
**Unique Number** : 5772534 **Diagnosed** : 25 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**C.G. EQUIPMENT**  
 7367 Wellington Rd. 30, Unit A  
 Guelph, ON  
 CA N0M 2T0  
 Contact: CG Equipment CG Guelph  
 cory@cgequipment.com  
 T: (519)826-0550  
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.