



Machine Id
712055
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113201	GFL0102898	GFL0102850
Sample Date		Client Info		24 Apr 2024	15 Mar 2024	08 Feb 2024
Machine Age	hrs	Client Info		3414	3173	2942
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	11	7	15
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>5	3	2	▲ 7
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	2	2
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	3	2	11
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION













Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	2	2
Fuel	%	ASTM D7593*	>3.0	0.0	1	0.9
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.8	0.1	0.9
Nitration	Abs/cm	ASTM D7624*	>20	8.5	8.7	9.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.2	23.3	24.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	0	34	39	27
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	39	44	47
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	487	467	522
Calcium	ppm	ASTM D5185(m)	1070	1677	1831	1702
Phosphorus	ppm	ASTM D5185(m)	1150	701	800	733
Zinc	ppm	ASTM D5185(m)	1270	840	911	896
Sulfur	ppm	ASTM D5185(m)	2060	1979	2395	2163
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.3	21.4	21.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.6	▲ 11.7	▲ 11.8

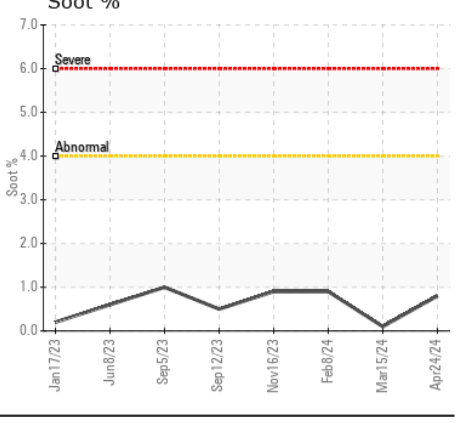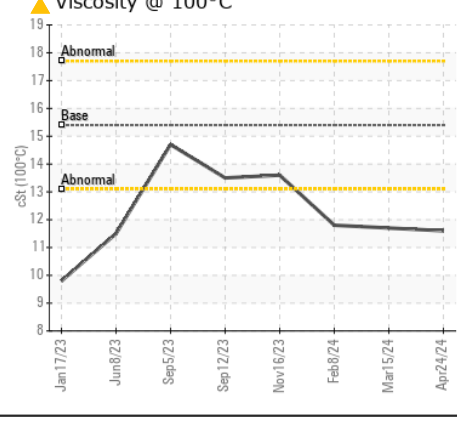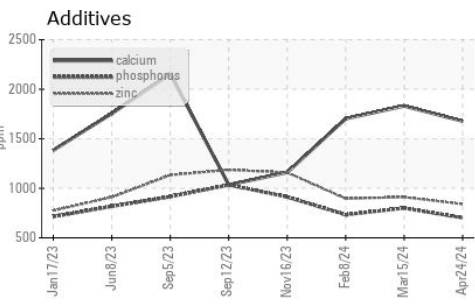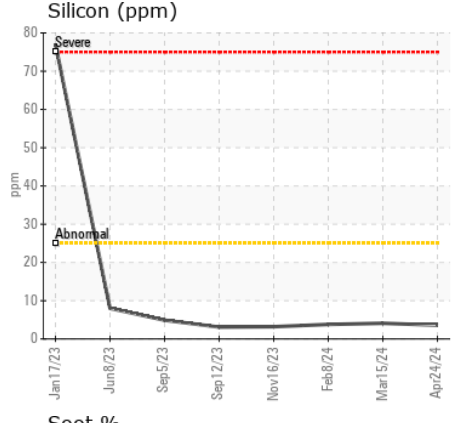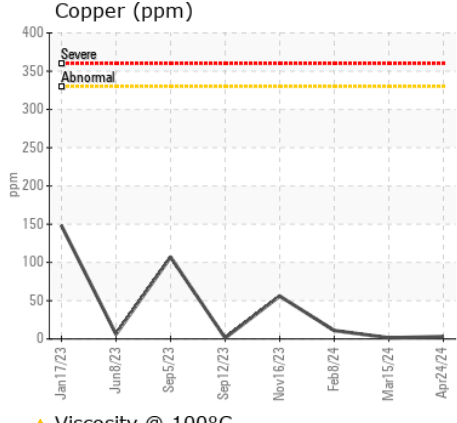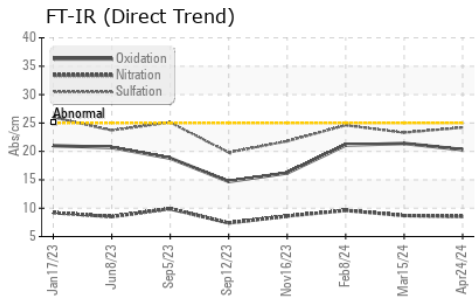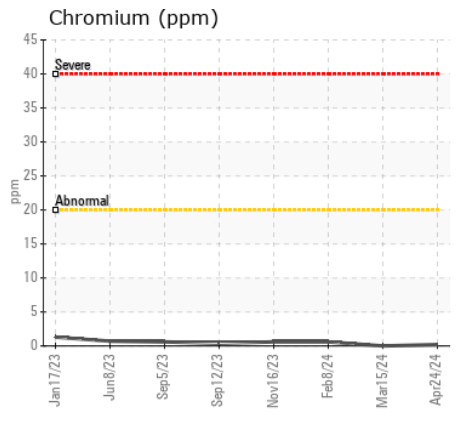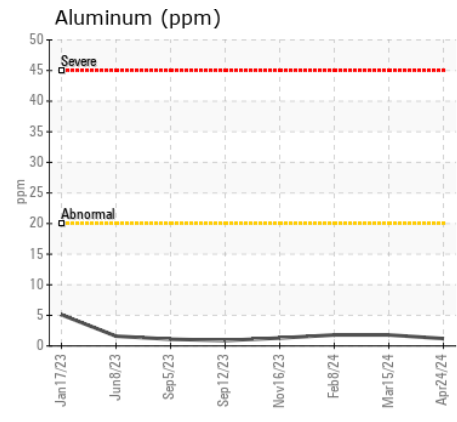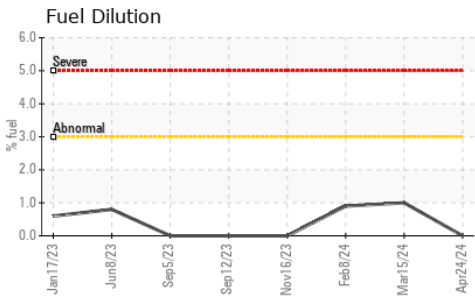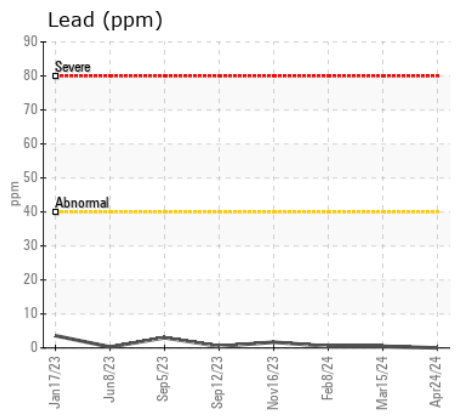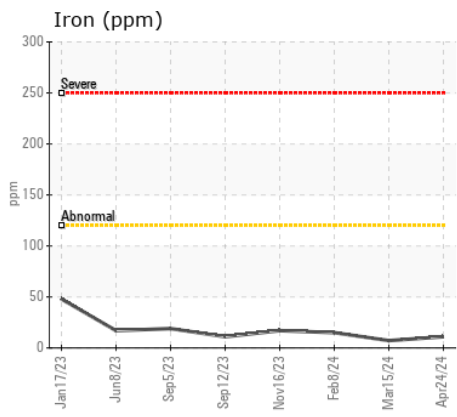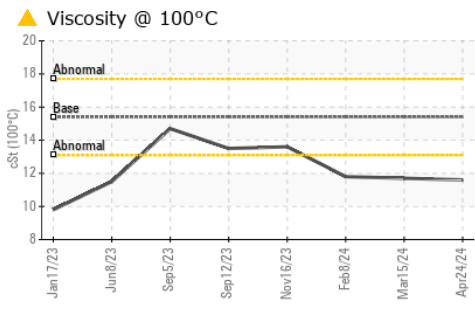

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113201
Lab Number : 02631542
Unique Number : 5772695
Test Package : MOB 1 (Additional Tests: FUELDILUTION, PercentFuel)
Received : 26 Apr 2024
Tested : 29 Apr 2024
Diagnosed : 29 Apr 2024 - Kevin Marson

GFL Environmental - 246 - Windsor
 2700 Deziel Dr
 Windsor, ON
 CA N8W 5H8
 Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.