



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**8134**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0112485</b>	GFL0097612	GFL0090620
Sample Date		Client Info		<b>25 Apr 2024</b>	05 Nov 2023	22 Aug 2023
Machine Age	hrs	Client Info		<b>0</b>	11656	112688
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	<b>29</b>	73	▲ 92
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	2	3
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	2	2
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>30	<b>4</b>	11	10
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	5	8
Copper	ppm	ASTM D5185(m)	>150	<b>1</b>	2	3
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>10</b>	10	14
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	13	16
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	0.0
Soot %	%	ASTM D7844*	>3	<b>0.5</b>	1.2	1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.0</b>	11.3	11.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.1</b>	23.7	25.2
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>8</b>	8	12
Boron	ppm	ASTM D5185(m)	2	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>56</b>	58	56
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>910</b>	924	897
Calcium	ppm	ASTM D5185(m)	1050	<b>1003</b>	988	964
Phosphorus	ppm	ASTM D5185(m)	995	<b>938</b>	946	970
Zinc	ppm	ASTM D5185(m)	1180	<b>1120</b>	1161	1096
Sulfur	ppm	ASTM D5185(m)	2600	<b>2362</b>	2332	2316
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.2</b>	22.0	23.4
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>10.8</b>	10.4	10.2

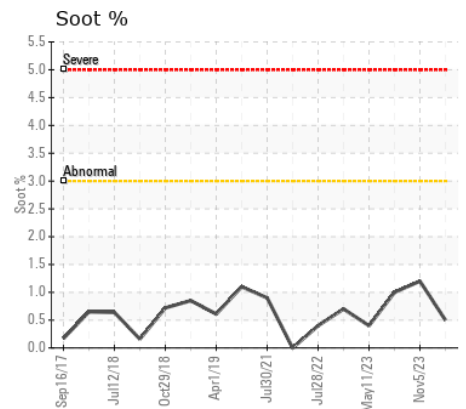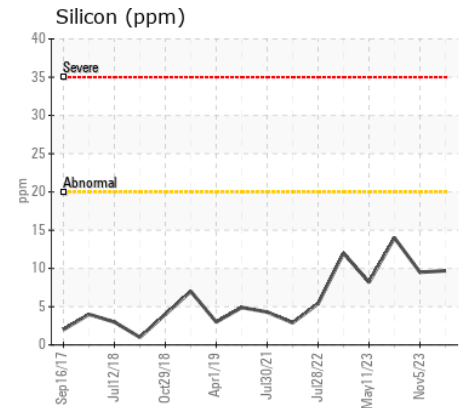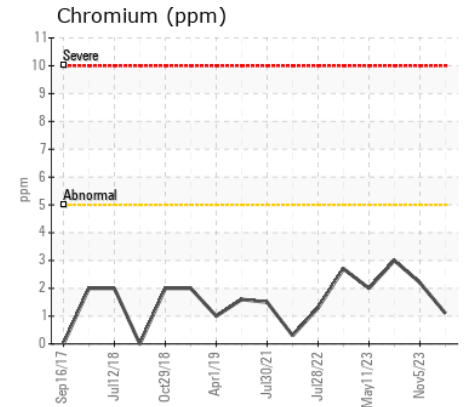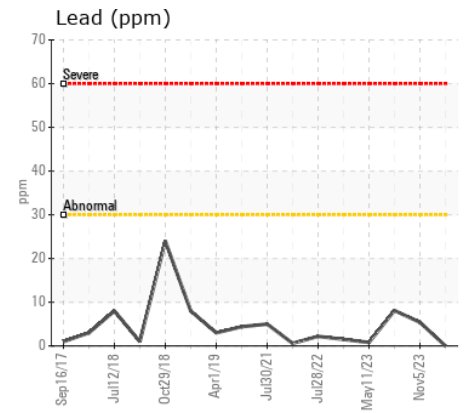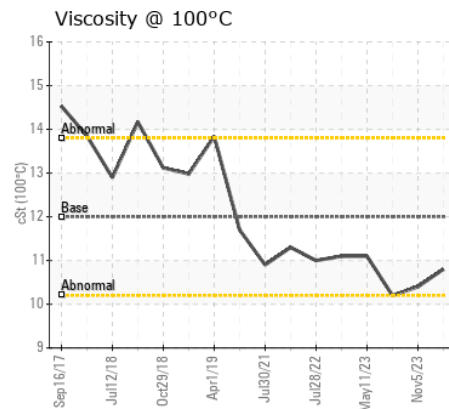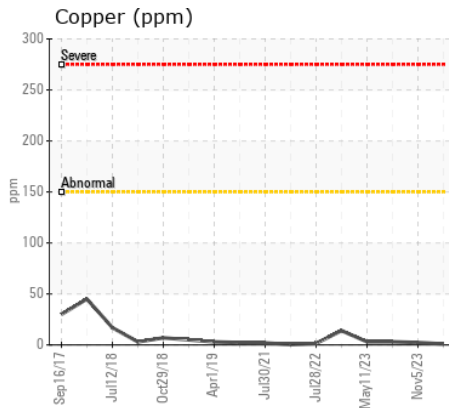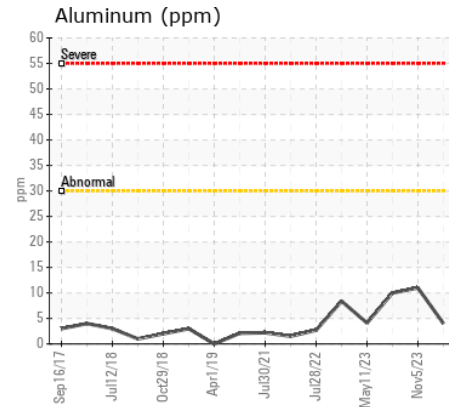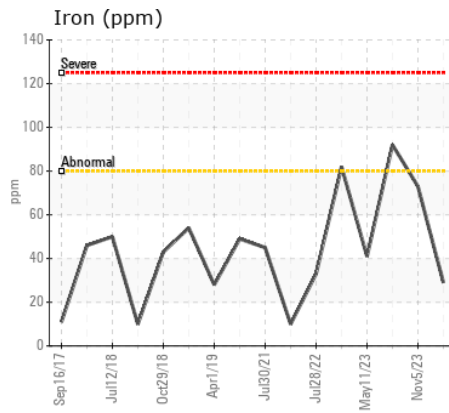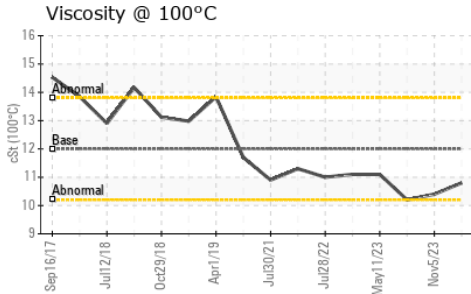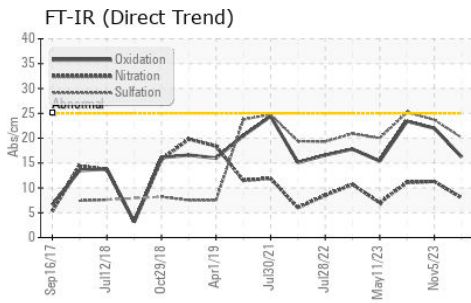

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0112485  
**Lab Number** : 02631560  
**Unique Number** : 5772713  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.