



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Kenworth T189 (S/N 1XKYDP9X4LJ965642)
 Component
Diesel Engine
 Fluid
INVENTORY EXPRESS 10W30 (44 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906430	WC0852077	WC0806836
Sample Date		Client Info		22 Apr 2024	13 Dec 2023	29 Jun 2023
Machine Age	kms	Client Info		706544	645994	564433
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	18	16	18
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	5	4	5
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	2	3	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	6	6
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.7	0.6	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.9	9.4	10.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.3	23.5	25.8
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)		6	8	8
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		70	85	86
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		573	291	49
Calcium	ppm	ASTM D5185(m)		1436	1657	2203
Phosphorus	ppm	ASTM D5185(m)		936	830	1036
Zinc	ppm	ASTM D5185(m)		1101	979	1134
Sulfur	ppm	ASTM D5185(m)		2568	2687	3024
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.6	14.8	18.2
Visc @ 100°C	cSt	ASTM D7279(m)		10.7	10.4	11.6

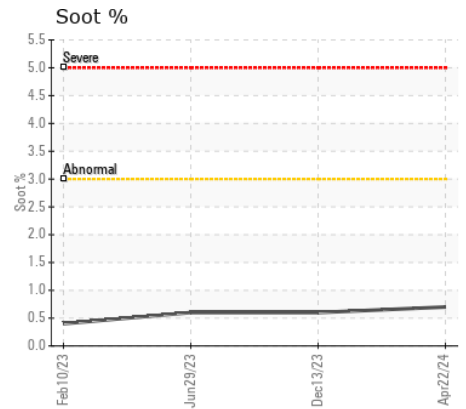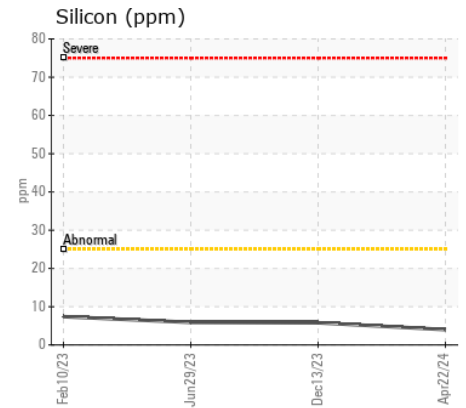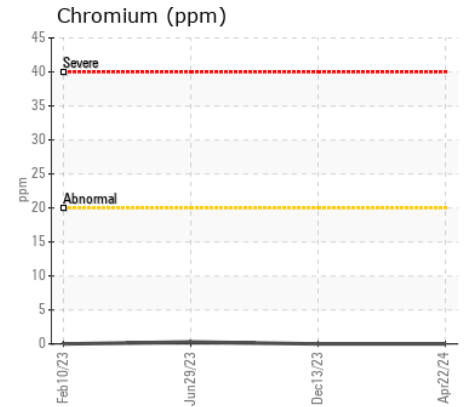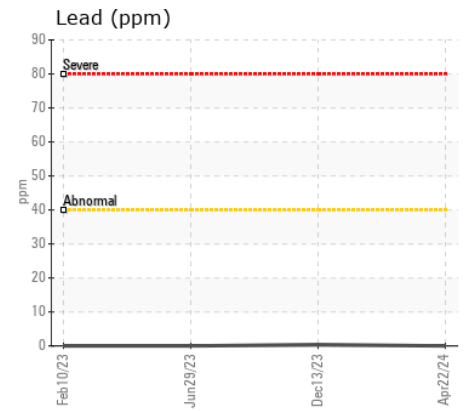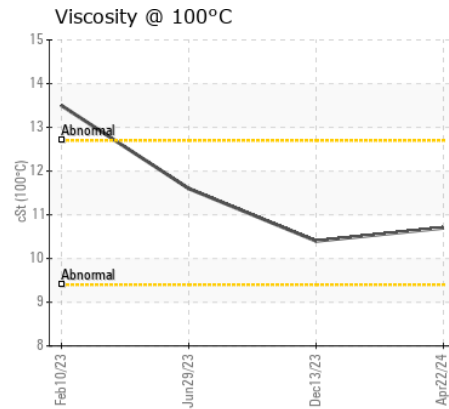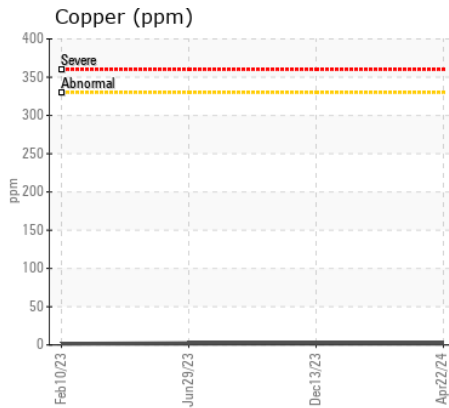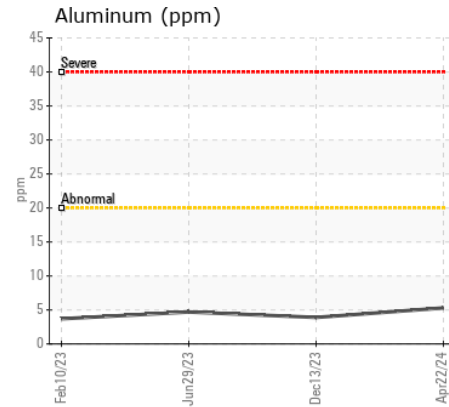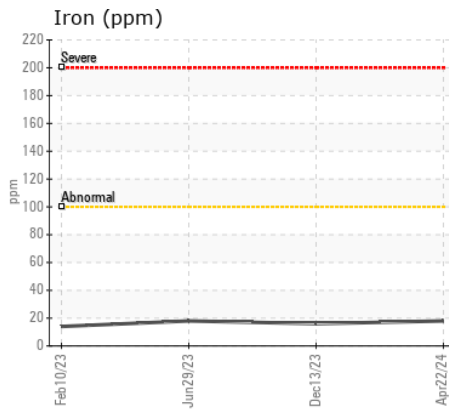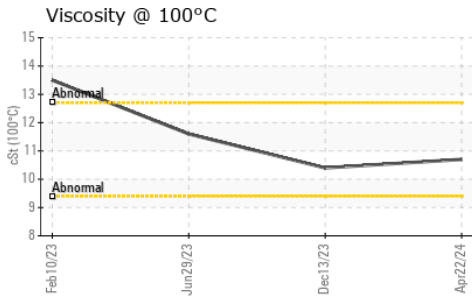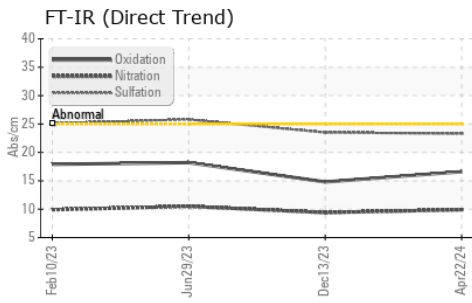

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0906430
Lab Number : 02631619
Unique Number : 5772772
Test Package : MOB 1 (Additional Tests: Visual)

Received : 26 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Zavcor Trucking Limited
 3650 Eagle Street
 Stevensville, ON
 CA L0S 1S0
 Contact: Jayesh Nanwani
 Jayeshn@zavcor.com
 T:
 F: (905)382-2555