



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(C-FFRE)
Machine Id
AIRBUS 53713
Component
Jet Turbine
Fluid
MOBIL JET OIL 254 (0 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0933593	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		204	---	---
Oil Age	hrs	Client Info		112	---	---
Filter Age	hrs	Client Info		204	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>8	0	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>2	0	---	---
Lead	ppm	ASTM D5185(m)	>3	0	---	---
Copper	ppm	ASTM D5185(m)	>3	<1	---	---
Tin	ppm	ASTM D5185(m)	>2	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>8	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water	%	ASTM D6304*	>0.1	0.041	---	---
ppm Water	ppm	ASTM D6304*	>1000	412	---	---
Particles >4µm		ASTM D7647	>2500	1677	---	---
Particles >6µm		ASTM D7647	>640	507	---	---
Particles >14µm		ASTM D7647	>80	68	---	---
Particles >21µm		ASTM D7647	>20	20	---	---
Particles >38µm		ASTM D7647	>4	2	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	18/16/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	0	0	---	---
Phosphorus	ppm	ASTM D5185(m)	3000	2821	---	---
Zinc	ppm	ASTM D5185(m)	0	16	---	---
Sulfur	ppm	ASTM D5185(m)	0	214	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.08	0.18	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.4	26.9	---	---

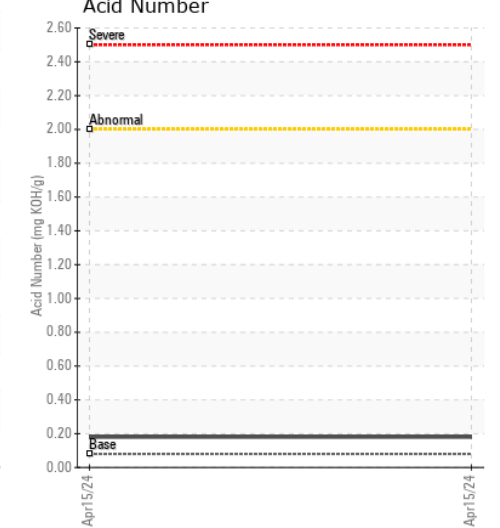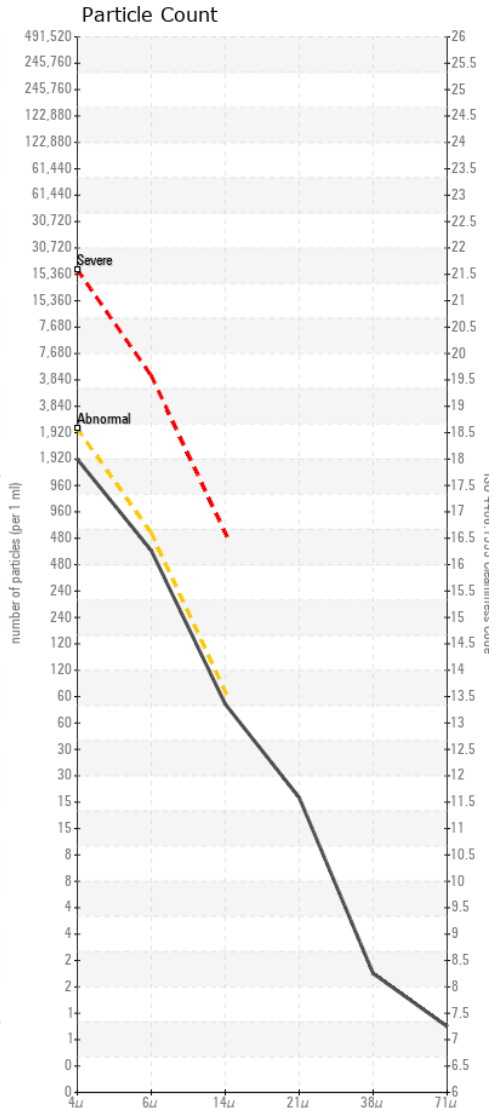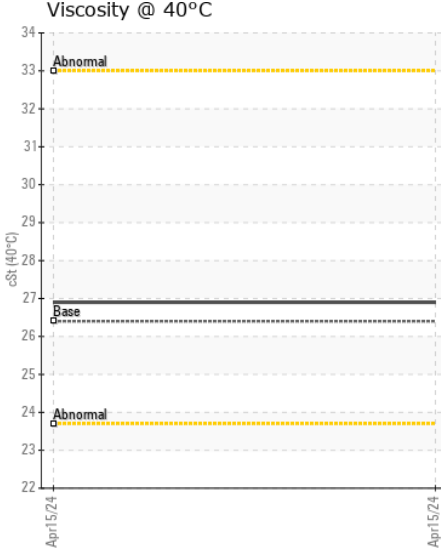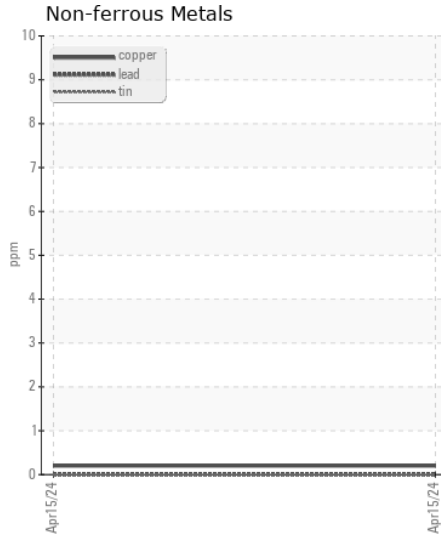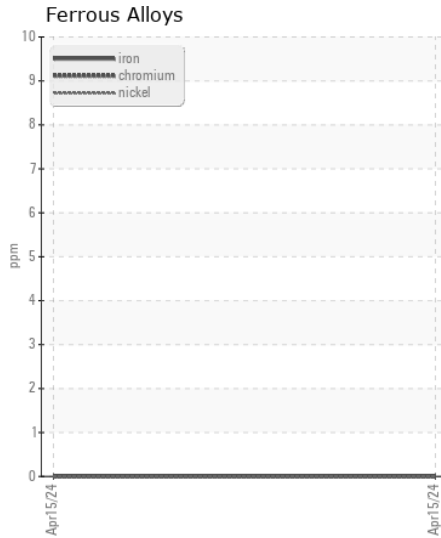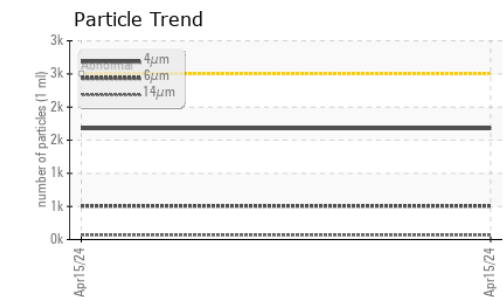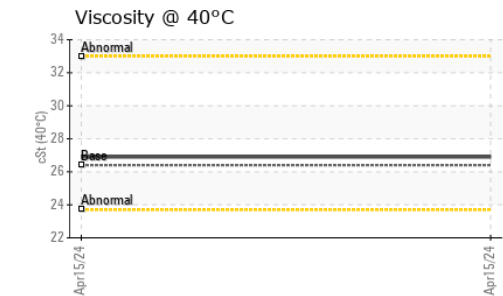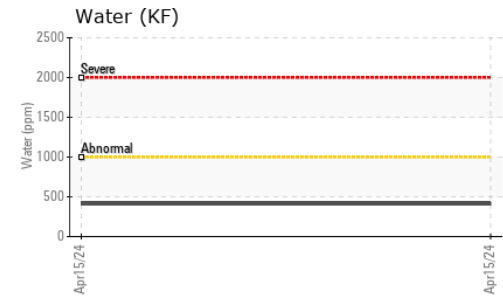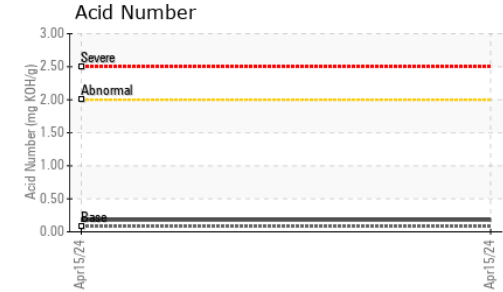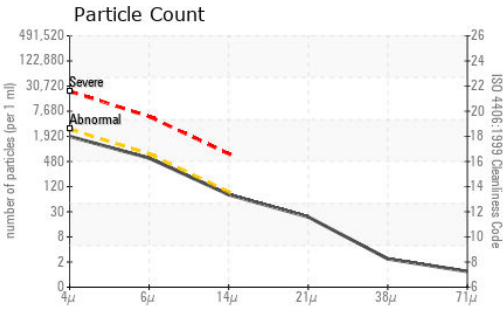

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0933593
Lab Number : 02631628
Unique Number : 5772781
Test Package : IND 2

SKYLINE HELICOPTER TECHNOLOGY
 195 MAGILL ST
 LIVELY, ON
 CA P3Y 1K6
 Contact: Joe Natale
 skyline@skylinehelicopters.com
 T: 1(705)692-2900
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.