



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
813081
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088685	PC0075487	---
Sample Date		Client Info		24 Apr 2024	24 Aug 2023	---
Machine Age	kms	Client Info		29115	14385	---
Oil Age	kms	Client Info		14385	0	---
Filter Age	kms	Client Info		14385	0	---
Oil Changed		Client Info		Not Changd	N/A	---
Filter Changed		Client Info		Not Changd	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>160	94	91	---
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	0	---
Aluminum	ppm	ASTM D5185(m)	>50	40	34	---
Lead	ppm	ASTM D5185(m)	>50	33	20	---
Copper	ppm	ASTM D5185(m)	>225	12	16	---
Tin	ppm	ASTM D5185(m)	>10	2	3	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	7	9	---
Potassium	ppm	ASTM D5185(m)	>20	5	5	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		9	9	---
Boron	ppm	ASTM D5185(m)		71	75	---
Barium	ppm	ASTM D5185(m)		<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		2	2	---
Magnesium	ppm	ASTM D5185(m)		2	2	---
Calcium	ppm	ASTM D5185(m)		74	67	---
Phosphorus	ppm	ASTM D5185(m)		240	270	---
Zinc	ppm	ASTM D5185(m)		10	12	---
Sulfur	ppm	ASTM D5185(m)		1007	1028	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	34.7	35.2	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.9	7	---
Viscosity Index (VI)	Scale	ASTM D2270*	155	163	164	---

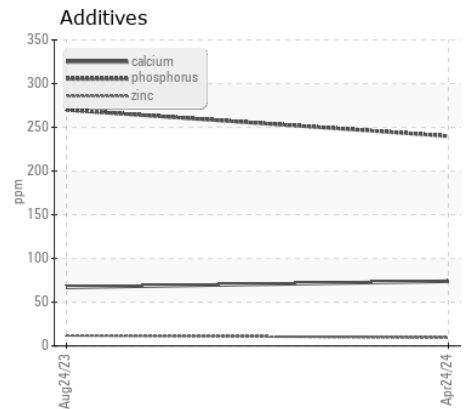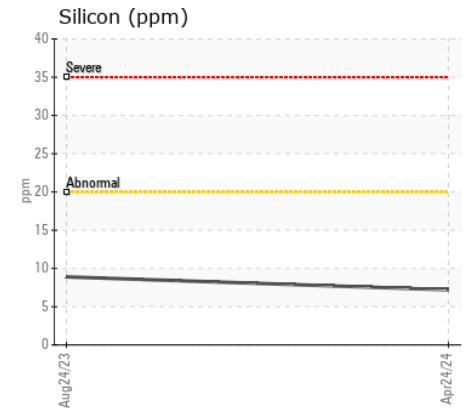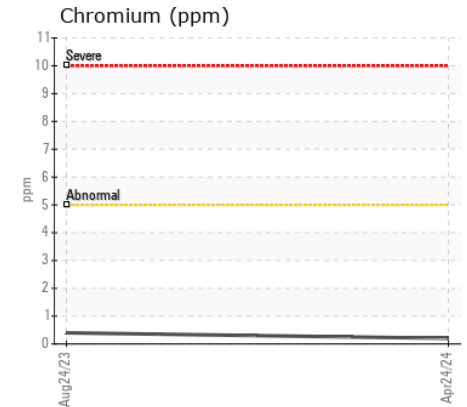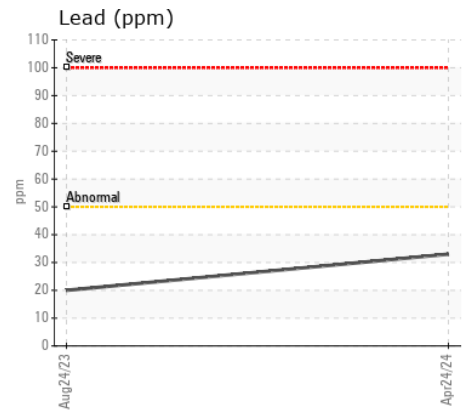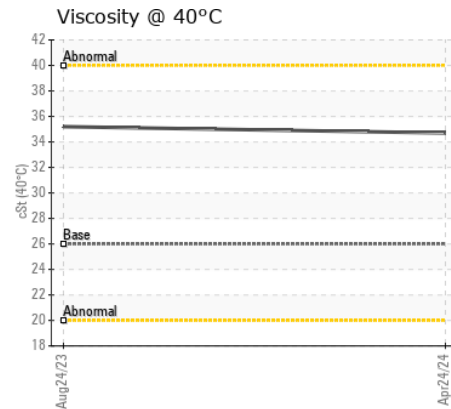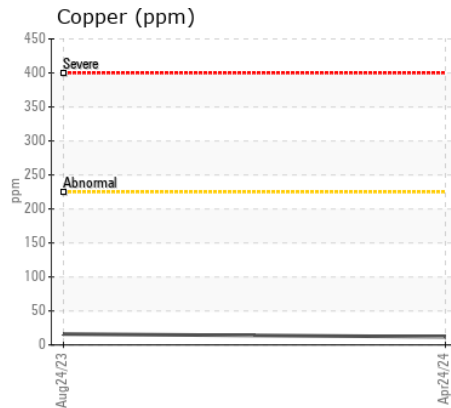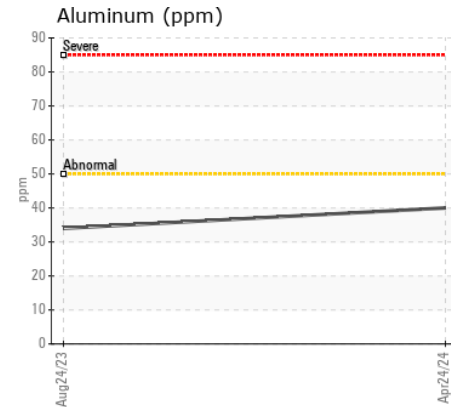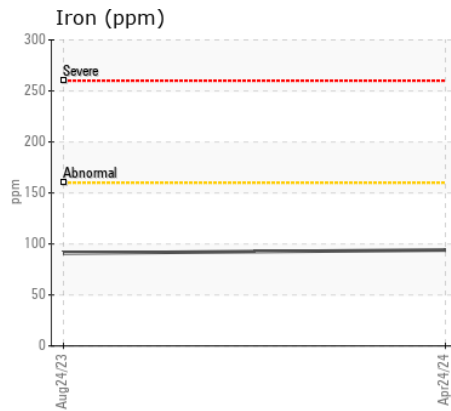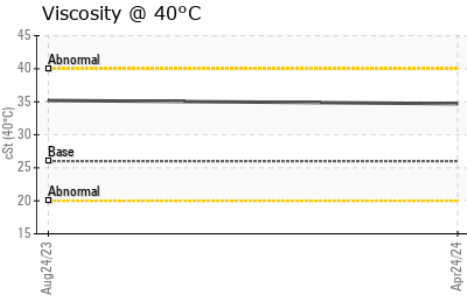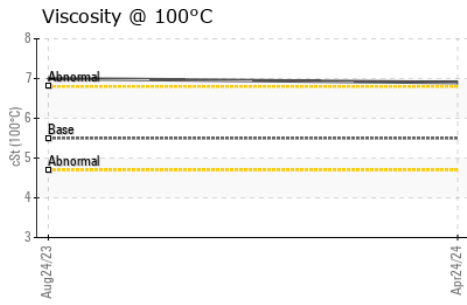

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088685 **Received** : 26 Apr 2024
Lab Number : 02631691 **Tested** : 26 Apr 2024
Unique Number : 5772844 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

GFL Environmental - 742 - Quebec City Solid Waste
 5160 Jean-Talon Pierre-Bertrand Bou
 Quebec City, QC
 CA G2J 1B7
 Contact: Jean Audet
 Jaudet@matrec.ca
 T: (418)624-0080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.