



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
812051
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION












L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088688	PC0083860	PC0077978
Sample Date		Client Info		22 Apr 2024	31 Jan 2024	01 Nov 2023
Machine Age	kms	Client Info		65891	60684	55249
Oil Age	kms	Client Info		60684	0	0
Filter Age	kms	Client Info		60684	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	SEVERE	SEVERE

Iron	ppm	ASTM D5185(m)	>160	148	▲ 364	▲ 304
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	1	1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>50	56	▲ 113	▲ 110
Lead	ppm	ASTM D5185(m)	>50	14	35	34
Copper	ppm	ASTM D5185(m)	>225	7	27	29
Tin	ppm	ASTM D5185(m)	>10	1	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>20	11	19	18
Potassium	ppm	ASTM D5185(m)	>20	2	7	6
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		6	22	19
Boron	ppm	ASTM D5185(m)		68	62	73
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		2	4	4
Magnesium	ppm	ASTM D5185(m)		<1	3	<1
Calcium	ppm	ASTM D5185(m)		107	65	63
Phosphorus	ppm	ASTM D5185(m)		225	242	269
Zinc	ppm	ASTM D5185(m)		7	16	14
Sulfur	ppm	ASTM D5185(m)		1264	939	974
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	34.2	36.2	35.5
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.7	7	7
Viscosity Index (VI)	Scale	ASTM D2270*	155	156	158	162

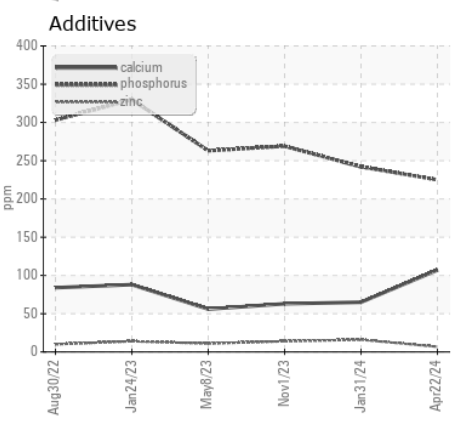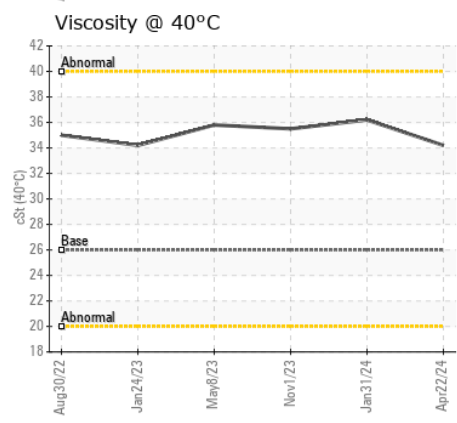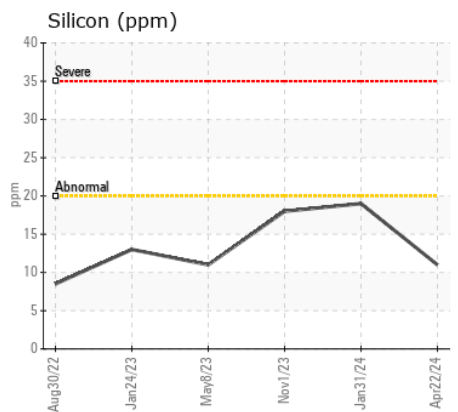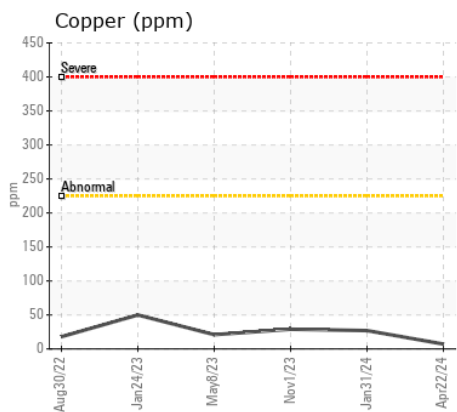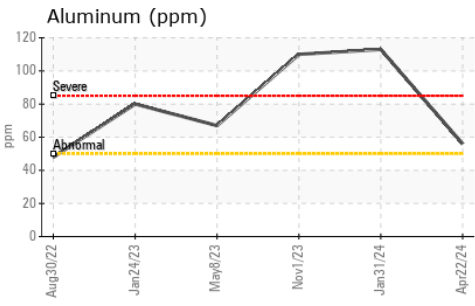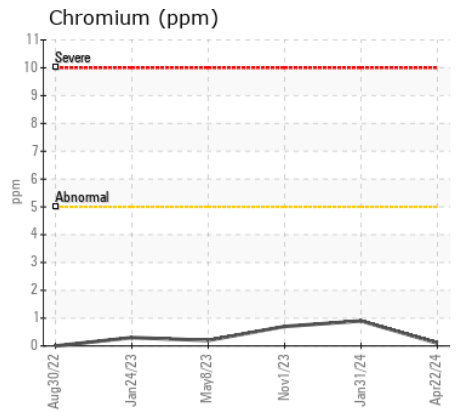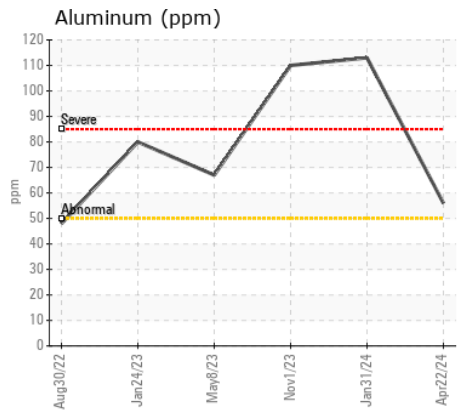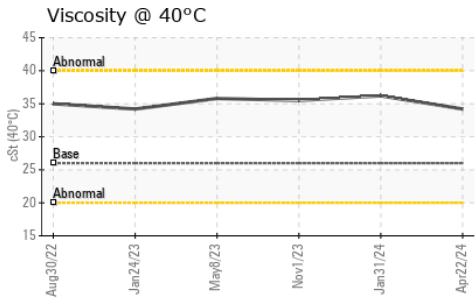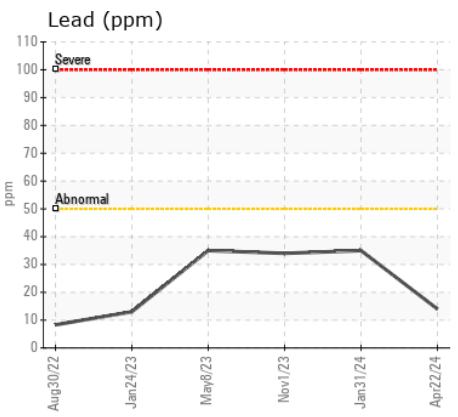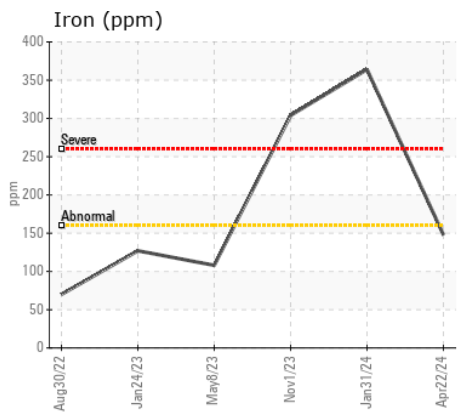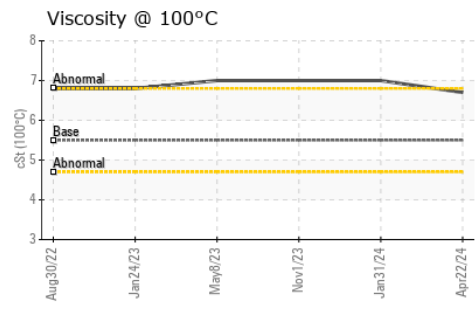

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088688 **Received** : 26 Apr 2024
Lab Number : 02631693 **Tested** : 26 Apr 2024
Unique Number : 5772846 **Diagnosed** : 29 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

GFL Environmental - 742 - Quebec City Solid Waste
 5160 Jean-Talon Pierre-Bertrand Bou
 Quebec City, QC
 CA G2J 1B7
 Contact: Jean Audet
 Jaudet@matrec.ca
 T: (418)624-0080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.