



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[8-400712]
Machine Id
27-4550
Component
Left Swing Drive
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450446	VCP394918	VCP352419
Sample Date		Client Info		12 Apr 2024	28 Jun 2023	18 Oct 2022
Machine Age	hrs	Client Info		12023	11005	10003
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>1200	131	78	129
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>10	0	<1	0
Titanium	ppm	ASTM D5185(m)		<1	<1	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	1	<1
Lead	ppm	ASTM D5185(m)	>50	0	0	<1
Copper	ppm	ASTM D5185(m)	>50	8	5	8
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>100	18	17	11
Potassium	ppm	ASTM D5185(m)	>20	2	<1	2
Water	%	ASTM D6304*	>0.25	0.143	---	---
ppm Water	ppm	ASTM D6304*	>2500	1436	---	---
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.25	.2%	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	4
Boron	ppm	ASTM D5185(m)		121	255	189
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		1	<1	2
Magnesium	ppm	ASTM D5185(m)		2	2	2
Calcium	ppm	ASTM D5185(m)		15	13	13
Phosphorus	ppm	ASTM D5185(m)		2334	2559	2344
Zinc	ppm	ASTM D5185(m)		27	17	19
Sulfur	ppm	ASTM D5185(m)		25898	26474	26995
Visc @ 40°C	cSt	ASTM D7279(m)		51.2	51.6	58.4

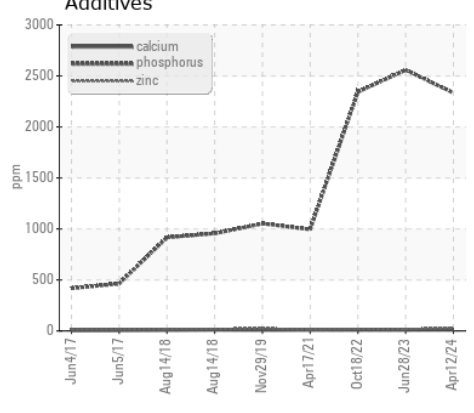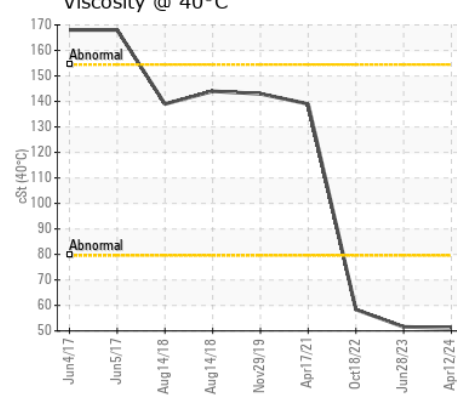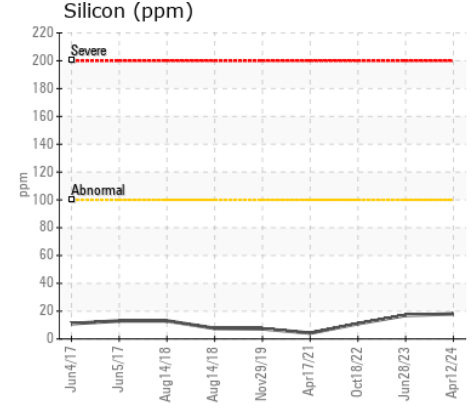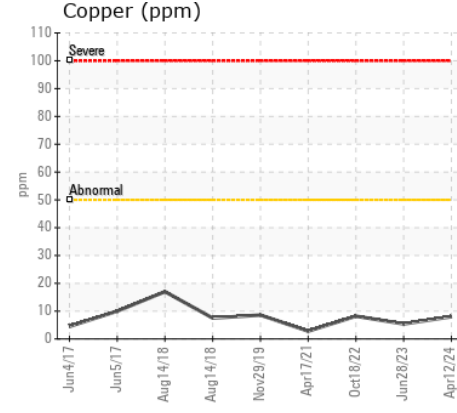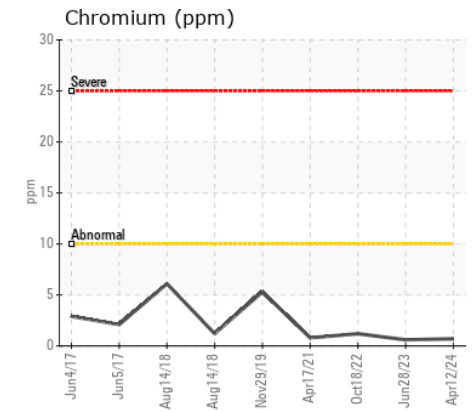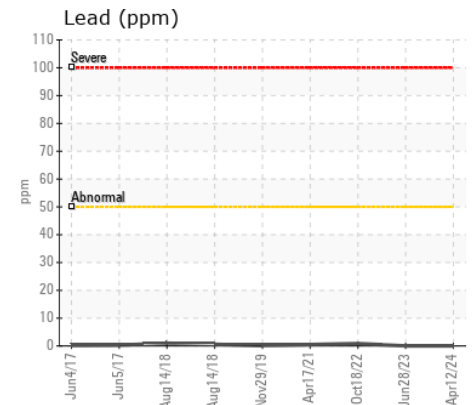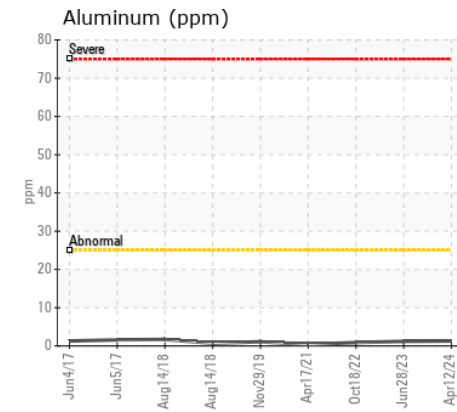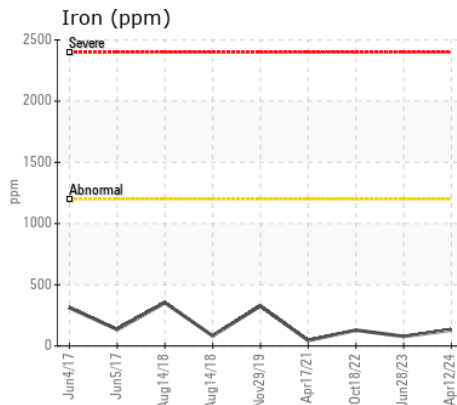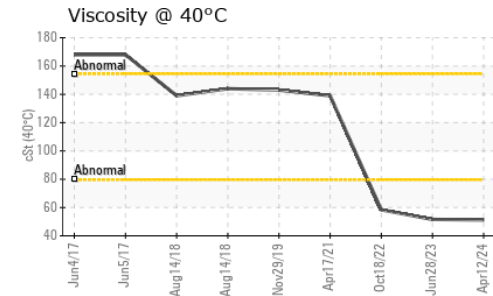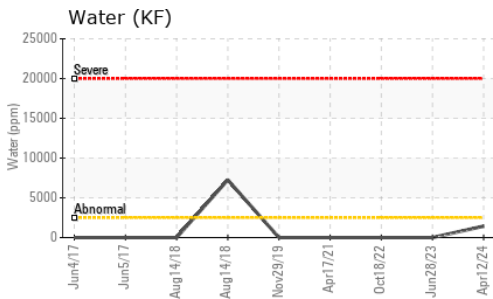

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP450446 **Received** : 26 Apr 2024
Lab Number : 02631717 **Tested** : 26 Apr 2024
Unique Number : 5772870 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KF)

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Dan Brown
 dan.brown@ca.crh.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.