



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH60M 143695-1475**  
Component  
**Swing Drive**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0248609</b>	---	---
Sample Date		Client Info		<b>19 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1001</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>None</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>350	<b>58</b>	---	---
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>300	<b>20</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

### CONTAMINATION











The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water	%	ASTM D6304*	>0.2	<b>0.053</b>	---	---
ppm Water	ppm	ASTM D6304*	>2000	<b>538</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>.5%</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<1	<b>3</b>	---	---
Calcium	ppm	ASTM D5185(m)	<1	<b>24</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	<b>2164</b>	---	---
Zinc	ppm	ASTM D5185(m)	<1	<b>61</b>	---	---
Sulfur	ppm	ASTM D5185(m)	23468	<b>24598</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	<b>152</b>	---	---

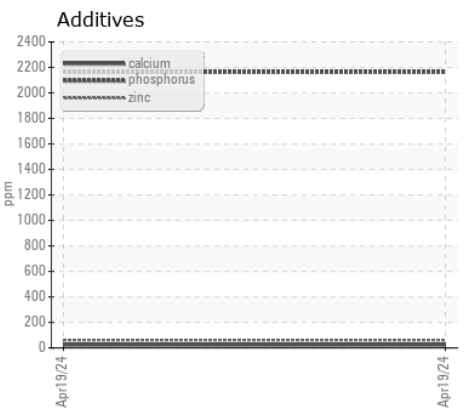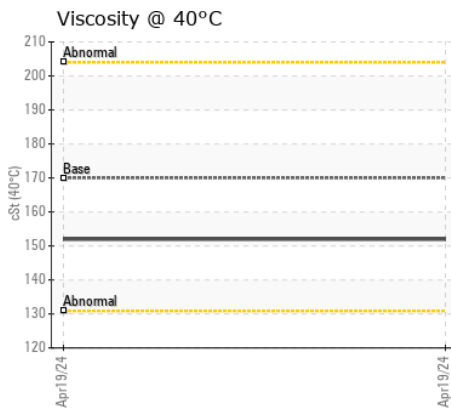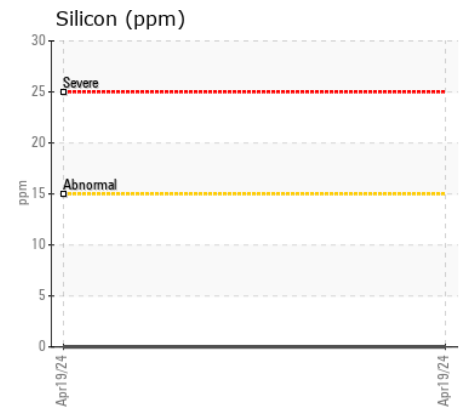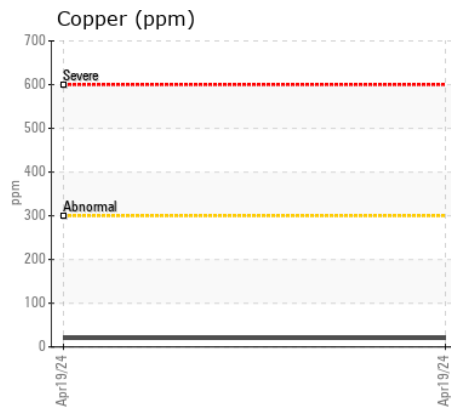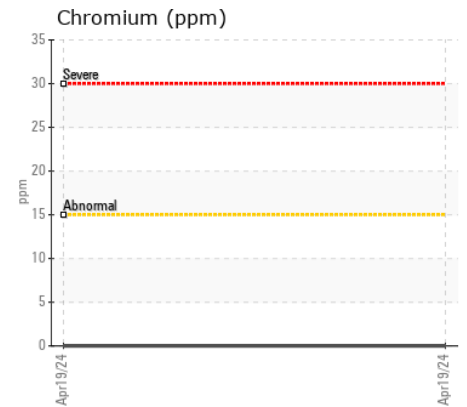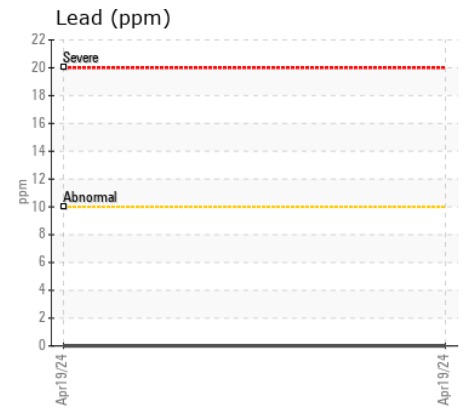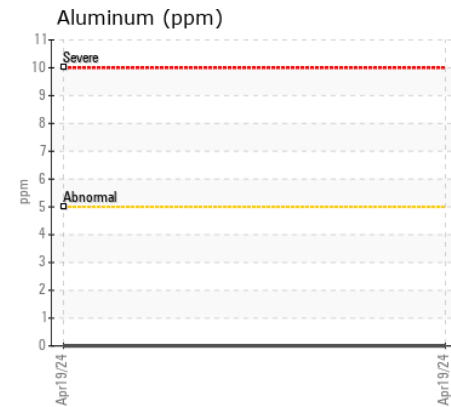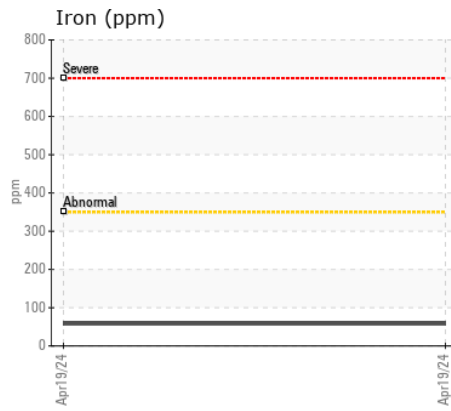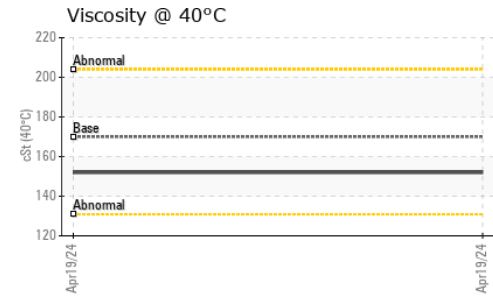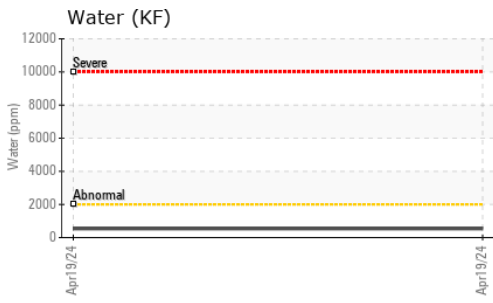

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0248609 **Received** : 26 Apr 2024  
**Lab Number** : **02631737** **Tested** : 26 Apr 2024  
**Unique Number** : 5772890 **Diagnosed** : 26 Apr 2024 - Wes Davis  
**Test Package** : MOBCE ( Additional Tests: KF )

**Groupe Label Inc**  
 21 rue St-Joseph  
 Saint-Michel-de-Squatec, QC  
 CA G0L 4H0  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: