



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH50M 123311-1216**  
Component  
**Splitter Box**  
Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0289496</b>	LH0285032	LH0277529
Sample Date		Client Info		<b>25 Apr 2024</b>	29 Jan 2024	27 Nov 2023
Machine Age	hrs	Client Info		<b>8175</b>	0	7310
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>11</b>	11	17
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185(m)	400	<b>291</b>	285	283
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	12	<b>3</b>	2	2
Calcium	ppm	ASTM D5185(m)	150	<b>38</b>	30	46
Phosphorus	ppm	ASTM D5185(m)	1650	<b>1186</b>	1169	1164
Zinc	ppm	ASTM D5185(m)	125	<b>61</b>	46	72
Sulfur	ppm	ASTM D5185(m)	22500	<b>19621</b>	19412	18436
Visc @ 40°C	cSt	ASTM D7279(m)	109	<b>85.8</b>	89.7	84.9

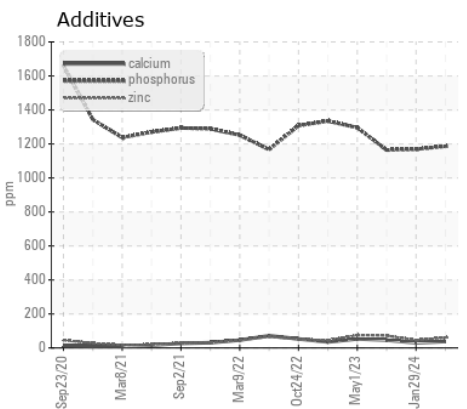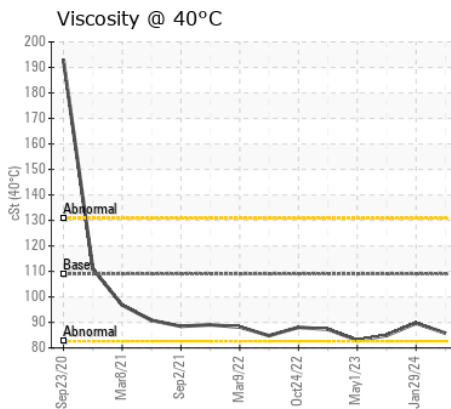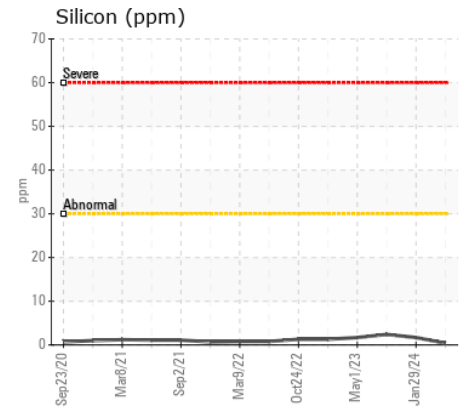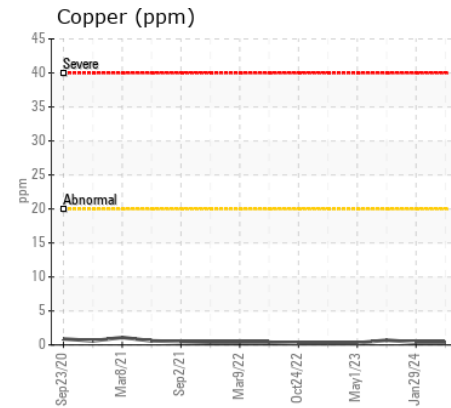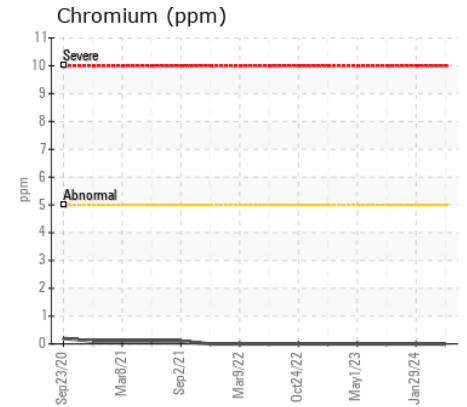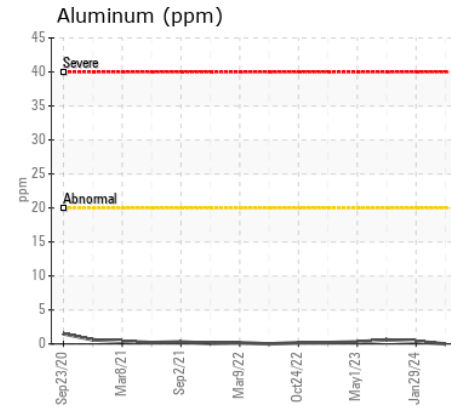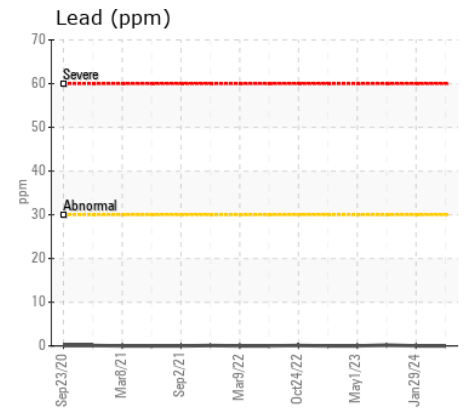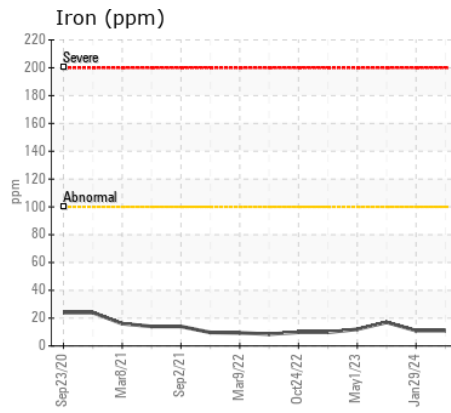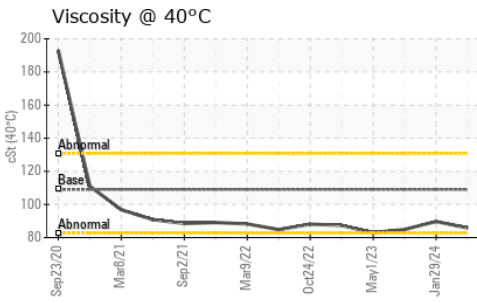

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0289496  
**Lab Number** : 02631744  
**Unique Number** : 5772897  
**Test Package** : MOB 1

**LONDON SALVAGE & TRADING LTD.**  
 333 EGERTON ST  
 LONDON, ON  
 CA N5Z 2H3  
 Contact: SERVICE MANAGER  
 terry@londonsalvage.com  
 T: (519)451-0680  
 F: (519)659-3576

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.