



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH22M 146587-1250
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0282651	LH0279535	LH
Sample Date		Client Info		05 Dec 2023	05 Dec 2023	28 Aug 2023
Machine Age	hrs	Client Info		2000	1259	574
Oil Age	hrs	Client Info		2000	0	0
Filter Age	hrs	Client Info		2000	0	0
Oil Changed		Client Info		Not Chngd	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	12	12	8
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>2	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>4	2	<1	<1
Copper	ppm	ASTM D5185(m)	>10	3	2	2
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>17	4	5	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	10472	29835	17909
Particles >6µm		ASTM D7647	>5000	2894	5572	3425
Particles >14µm		ASTM D7647	>640	164	212	122
Particles >21µm		ASTM D7647	>160	35	41	22
Particles >38µm		ASTM D7647	>40	1	2	2
Particles >71µm		ASTM D7647	>10	1	0	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	21/19/15	22/20/15	21/19/14
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	1
Boron	ppm	ASTM D5185(m)		0	<1	<1
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)		5	4	4
Calcium	ppm	ASTM D5185(m)		1350	1329	1371
Phosphorus	ppm	ASTM D5185(m)		575	559	650
Zinc	ppm	ASTM D5185(m)		657	665	700
Sulfur	ppm	ASTM D5185(m)		3329	3395	3545
Visc @ 40°C	cSt	ASTM D7279(m)		43.4	44.0	44.9

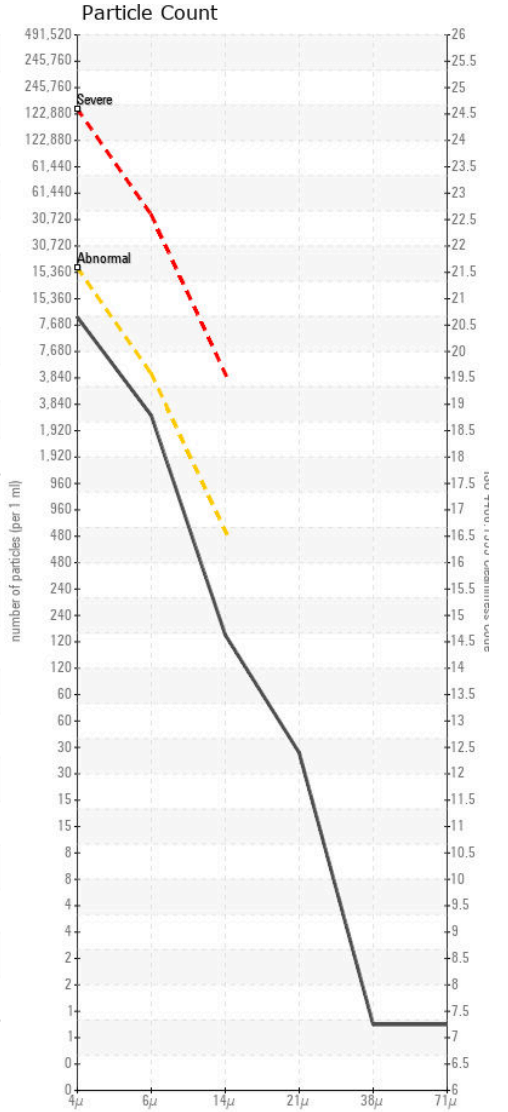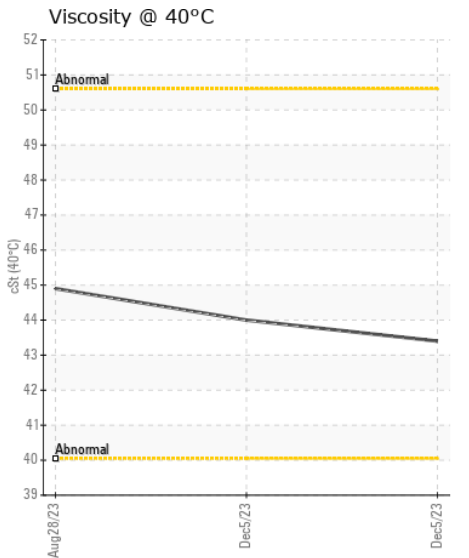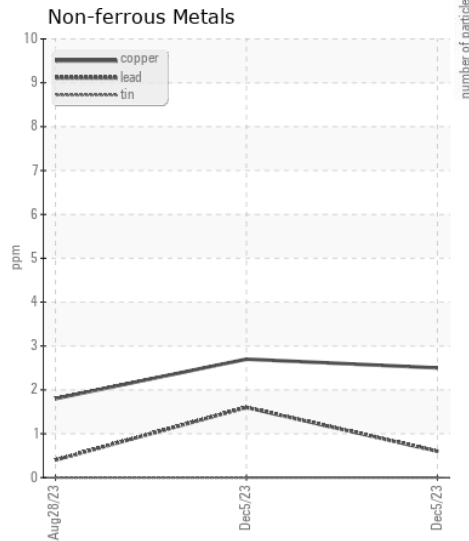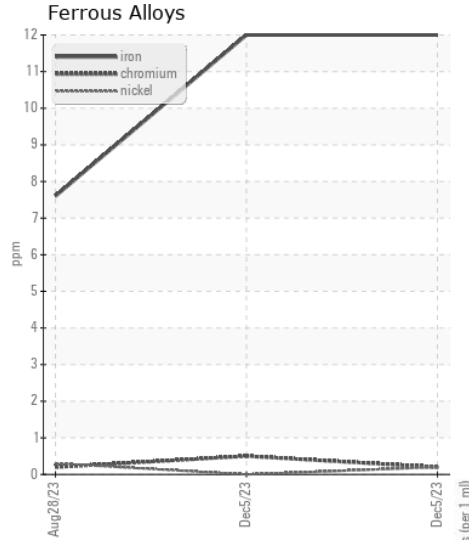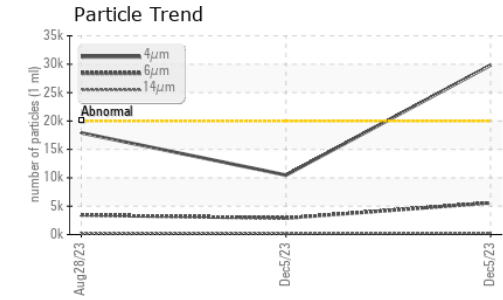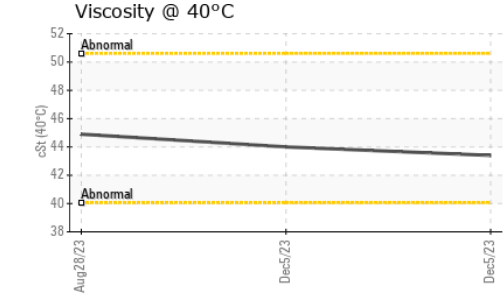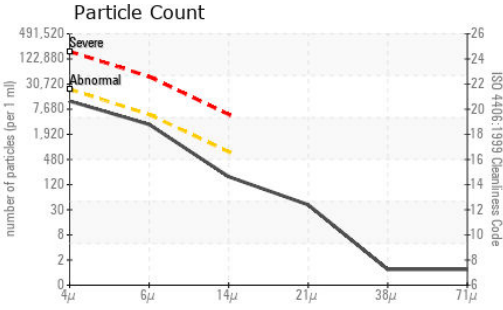

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0282651 **Received** : 29 Apr 2024
Lab Number : 02631986 **Tested** : 30 Apr 2024
Unique Number : 5773139 **Diagnosed** : 30 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

CONTENEUR ROSE INC.
 89 RUE MORANE
 LAVAL, QC
 CA H7M 1R5
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: