



COOLANT REPORT

CORROSION	NORMAL
CONTAMINANTS	NORMAL
COOLANT CONDITION	NORMAL

Area
ESTRUXTURE [154148]
 Machine Id
25374350 GEN 2
 Component
Coolant
 Fluid
FLEETGUARD ES COMPLEAT (--- GAL)

RECOMMENDATION

The fluid is suitable for further service. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0022714	CU0020080	CU0019260
Sample Date		Client Info		19 Mar 2024	28 Nov 2022	12 Apr 2022
Machine Age	hrs	Client Info		307	299	289
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CORROSION

All metal levels are normal indicating no corrosion in the cooling system.

Iron	ppm	ASTM D5185(m)	>15	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>10	3	4	5
Copper	ppm	ASTM D5185(m)	>10	1	3	2
Lead	ppm	ASTM D5185(m)	>10	0	0	1
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Silver	ppm	ASTM D5185(m)	>10	0	0	<1
Zinc	ppm	ASTM D5185(m)	>10	<1	<1	<1

CONTAMINANTS








There is no indication of any contamination in the coolant.

Calcium	ppm	ASTM D5185(m)	>100	2	1	1
Magnesium	ppm	ASTM D5185(m)	>40	<1	<1	<1
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Coolant Appearance		Visual*	Clear	Clear	Clear	Clear

COOLANT CONDITION

The nitrite level is acceptable. The pH level of this fluid is within the acceptable limits.

Boiling Point	°C	WC Method*		108	---	---
Specific Gravity		ASTM D1298*	1.07	1.069	1.069	1.068
pH	Scale 0-14	ASTM D1287*	10.5	8.62	8.74	9.05
Nitrites	ppm	Alcan Test Kit*		1280	1320	1600
Reserve Alkalinity	Scale 0-20	ASTM D1121*	5.0	7.1	6.5	6.5
Percentage Glycol	%	ASTM D3321*		51.4	51.3	50.8
Freezing Point	°C	ASTM D3321*	-37	-39	-38	-35
Carboxylate				---	---	---
Silicon	ppm	ASTM D5185(m)		45	61	63
Phosphorus	ppm	ASTM D5185(m)		739	781	809
Boron	ppm	ASTM D5185(m)		249	302	305
Molybdenum	ppm	ASTM D5185(m)		404	474	486
Sodium	ppm	ASTM D5185(m)		1431	1344	1126
Potassium	ppm	ASTM D5185(m)		4446	3025	2271
Coolant Color		Visual*	Blue	Blue	Green	Green

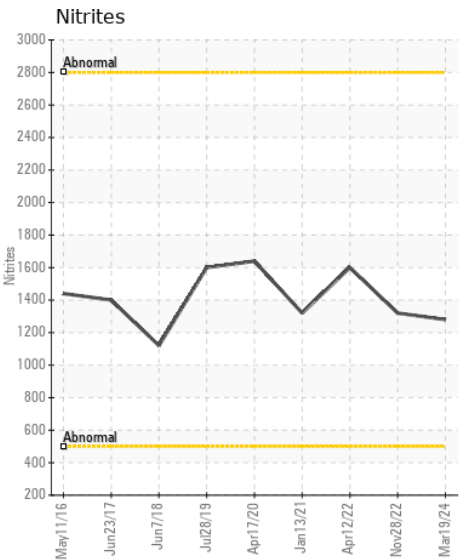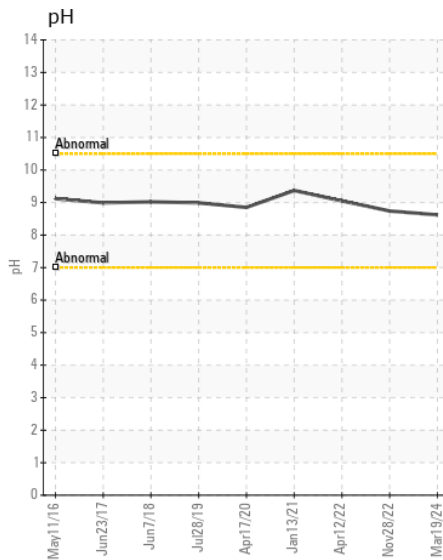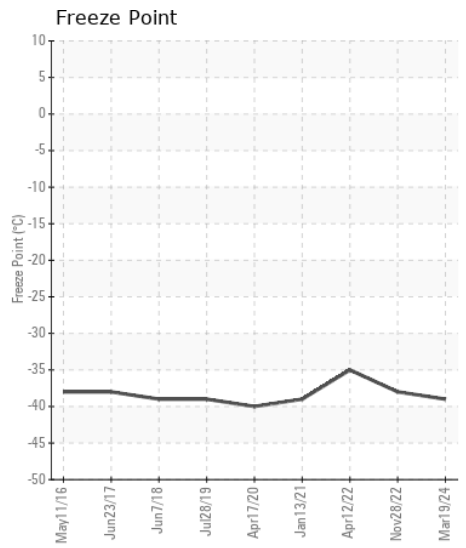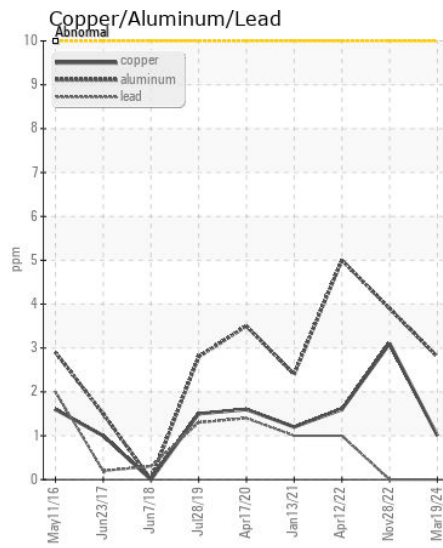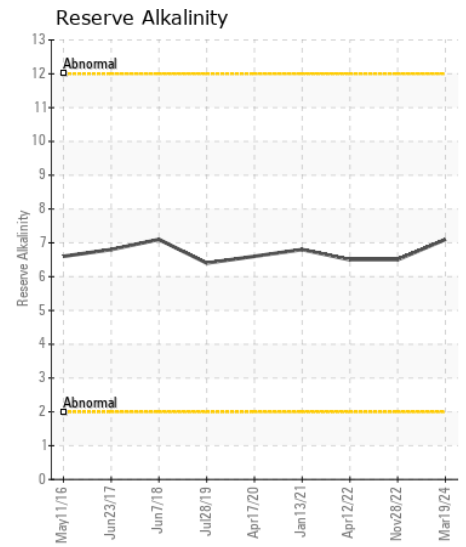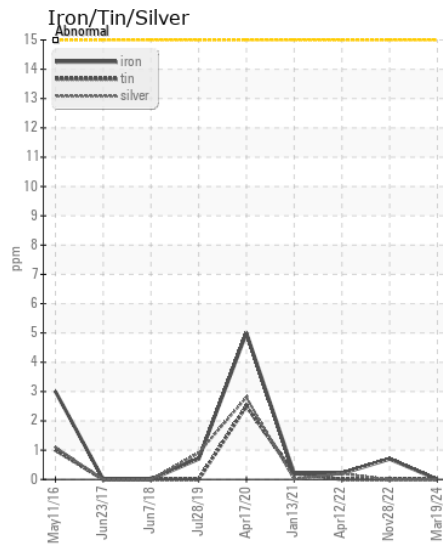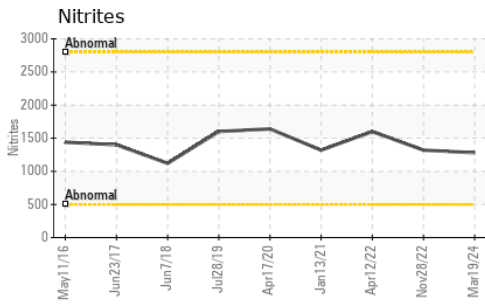

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0022714 **Received** : 29 Apr 2024
Lab Number : 02632106 **Tested** : 30 Apr 2024
Unique Number : 5773259 **Diagnosed** : 01 May 2024 - Kevin Marson
Test Package : COOL (Additional Tests: GlycolType)

CUMMINS CANADA ULC - GENERATOR DIVISION
 7175 PACIFIC CIRCLE
 MISSISSAUGA, ON
 CA L5T 2A5
 Contact: Elisia Johnson
 elisia.johnson@cummins.com
 T: (905)795-0050
 F: (905)795-9252

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.