



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**801146**  
 Component  
**Diesel Engine**  
 Fluid  
**SAE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0096774</b>	---	---
Sample Date		Client Info		<b>15 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>600</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	<b>8</b>	---	---
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>150	<b>8</b>	---	---
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.7</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.9</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	<b>7</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>11</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>53</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>557</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1660</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>686</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>930</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2034</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.6</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	<b>14.6</b>	---	---

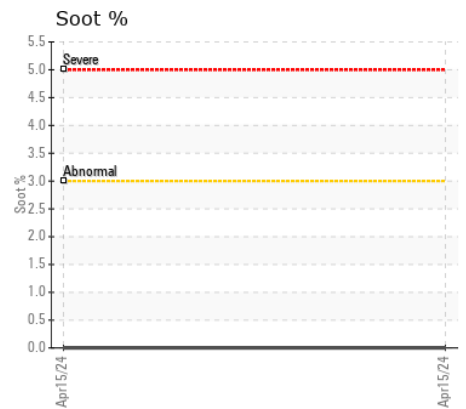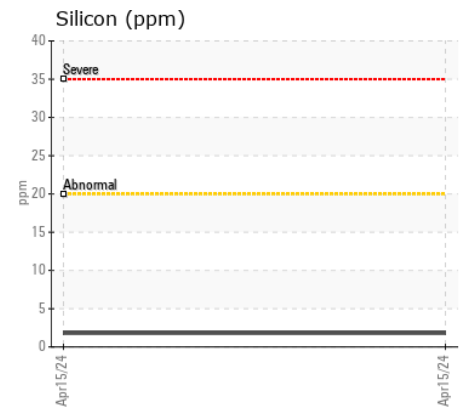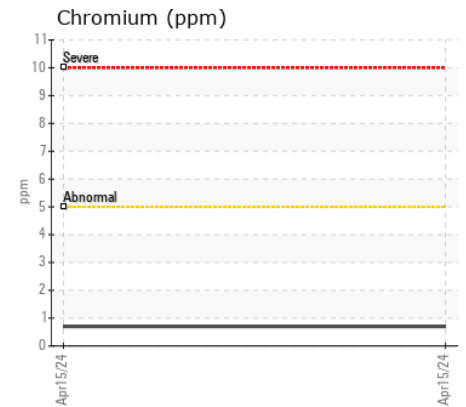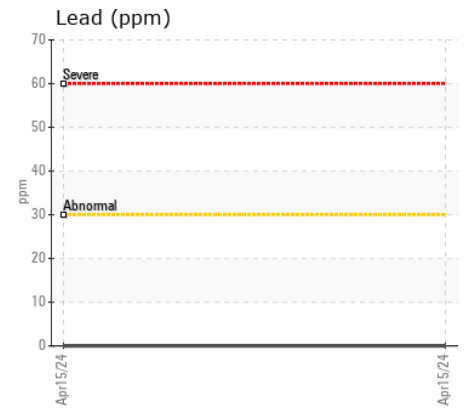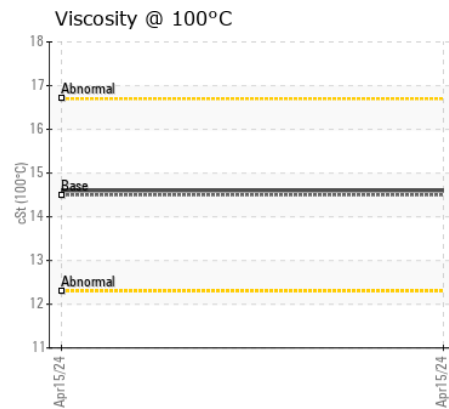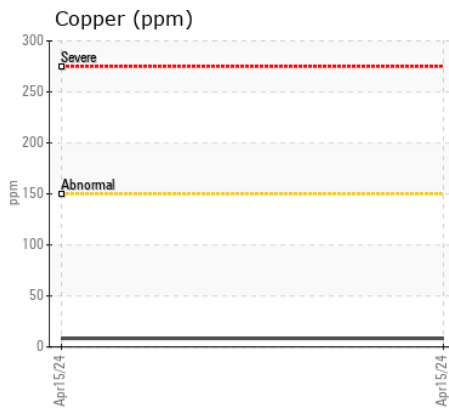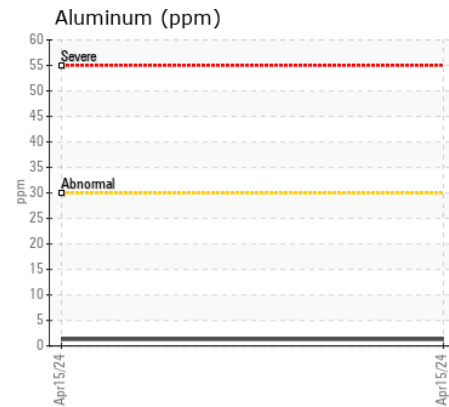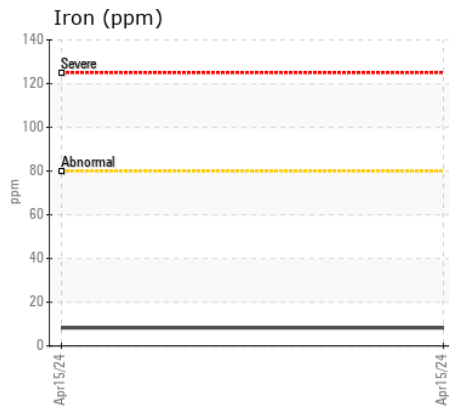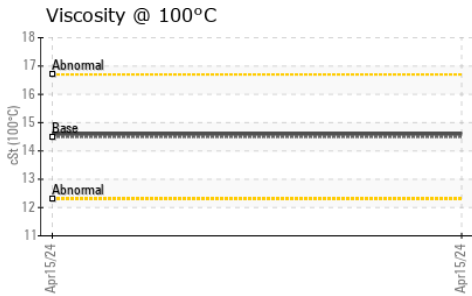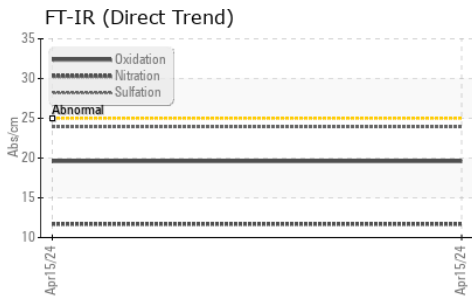

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 574 - Vancouver Fleet**  
**Sample No.** : GFL0096774 **Received** : 30 Apr 2024  
**Lab Number** : 02632209 **Tested** : 30 Apr 2024  
**Unique Number** : 5773362 **Diagnosed** : 30 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

70 Golden Drive,  
 Coquitlam, BC  
 CA V3K 6B5  
 Contact: Sanjay Kisun  
 skisun@gflenv.com  
 T: (604)529-4030  
 F: (604)529-4026

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.