



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[8-397994]**

Machine Id

**16-8014**

Component

**Transmission (Auto)**

Fluid

**VOLVO AT 102 (--- GAL)**



### RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

### WEAR

Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

### CONTAMINATION

There is no indication of any contamination in the fluid.

### FLUID CONDITION

The fluid is no longer serviceable as a result of the abnormal and/or severe wear.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP393040</b>	VCP394343	VCP394888
Sample Date		Client Info		<b>22 Mar 2024</b>	06 Dec 2023	28 Jun 2023
Machine Age	hrs	Client Info		<b>11440</b>	11100	10445
Oil Age	hrs	Client Info		<b>500</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL

PQ		ASTM D8184*	>60	<b>7</b>	0	---
Iron	ppm	ASTM D5185(m)	>140	<b>▲ 188</b>	▲ 184	154
Chromium	ppm	ASTM D5185(m)	>2	<b>1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>3</b>	3	2
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>100	<b>11</b>	11	8
Tin	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE


Silicon	ppm	ASTM D5185(m)	>20	<b>2</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Boron	ppm	ASTM D5185(m)	187	<b>71</b>	76	72
Barium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)	0.0	<b>3</b>	3	3
Magnesium	ppm	ASTM D5185(m)	6.8	<b>2</b>	1	2
Calcium	ppm	ASTM D5185(m)	215	<b>239</b>	82	78
Phosphorus	ppm	ASTM D5185(m)	445	<b>238</b>	191	201
Zinc	ppm	ASTM D5185(m)	56	<b>80</b>	14	14
Sulfur	ppm	ASTM D5185(m)	1336	<b>1663</b>	1640	1631
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	<b>27.7</b>	27.3	27.4


▲ Ferrous Alloys

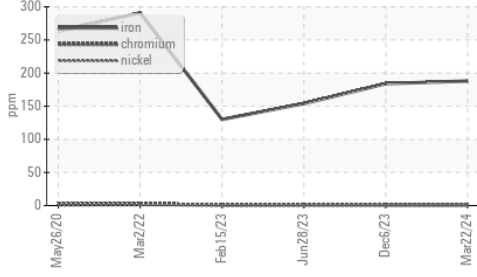


▲ Iron (ppm)

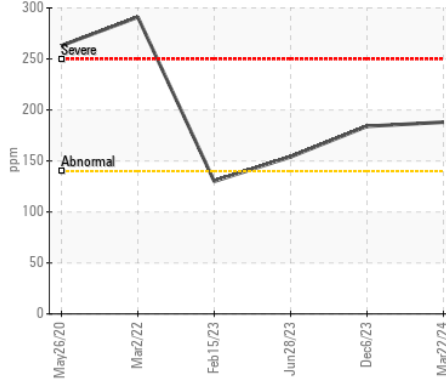


Lead (ppm)

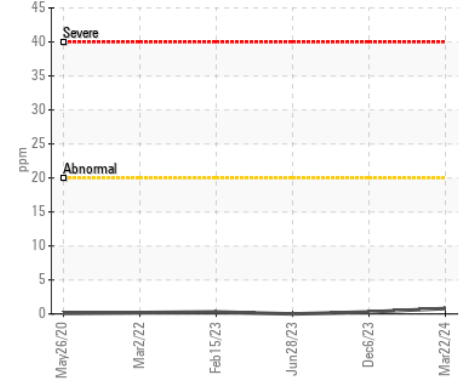


Viscosity @ 40°C

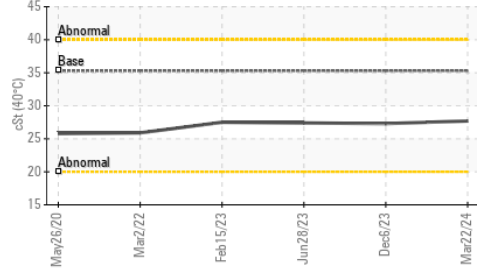


Aluminum (ppm)

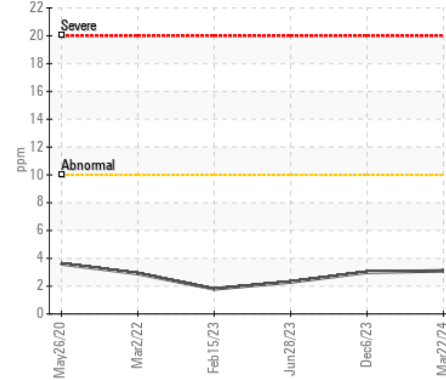


Chromium (ppm)

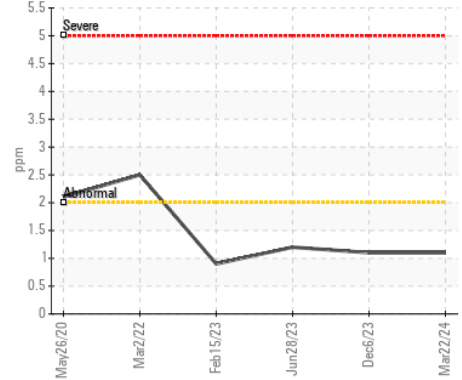


PQ

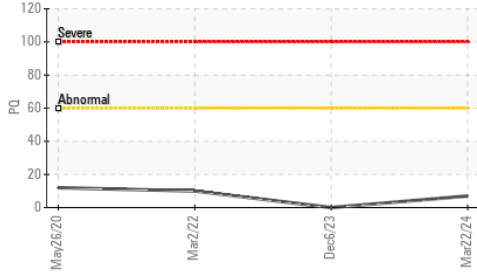


Copper (ppm)

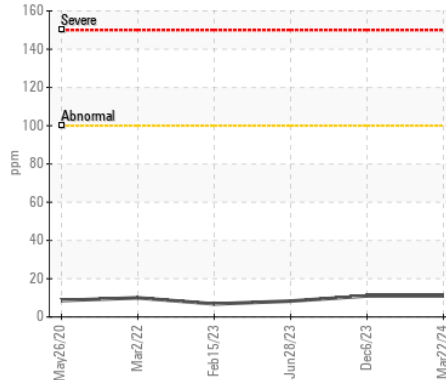


Silicon (ppm)

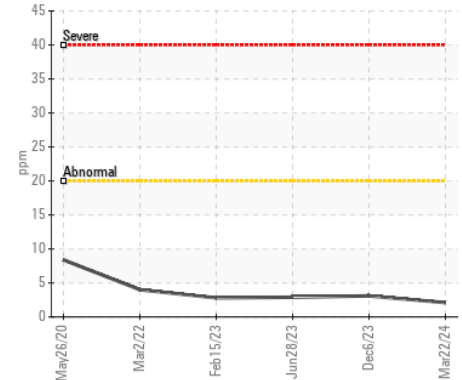

Viscosity @ 40°C

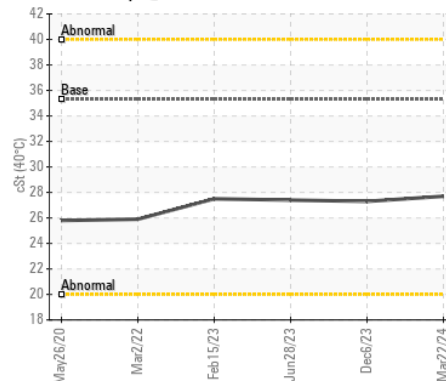

PQ

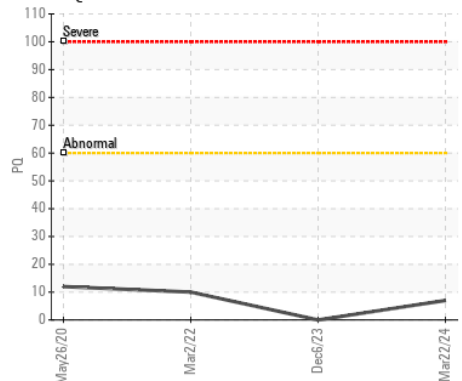

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP393040 **Received** : 30 Apr 2024  
**Lab Number** : 02632352 **Tested** : 30 Apr 2024  
**Unique Number** : 5773505 **Diagnosed** : 30 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**CRH CANADA GROUP INC.**  
 P.O. BOX 5400  
 CONCORD, ON  
 CA L4K 1B6  
 Contact: Dan Brown  
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: