



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[8-397993]
 Machine Id
16-8017
 Component
Transmission (Auto)
 Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
 Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION











Additive levels indicate the addition of a different brand, or type of fluid.
 The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449349	VCP394224	VCP392251
Sample Date		Client Info		21 Mar 2024	20 Dec 2023	05 Oct 2023
Machine Age	hrs	Client Info		9578	9021	8523
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>140	114	93	84
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	1	1	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>100	3	3	2
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>20	1	2	2
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		2	<1	1
Boron	ppm	ASTM D5185(m)	187	81	85	86
Barium	ppm	ASTM D5185(m)	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0.0	2	1	1
Magnesium	ppm	ASTM D5185(m)	6.8	1	1	<1
Calcium	ppm	ASTM D5185(m)	215	79	73	73
Phosphorus	ppm	ASTM D5185(m)	445	193	190	195
Zinc	ppm	ASTM D5185(m)	56	10	7	8
Sulfur	ppm	ASTM D5185(m)	1336	1662	1781	1699
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	26.5	27.6	28.0

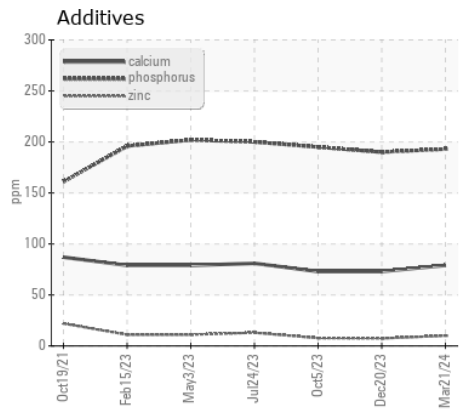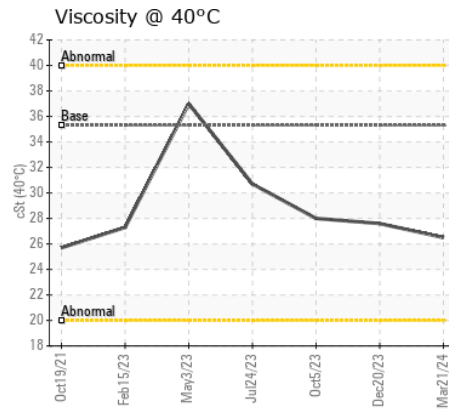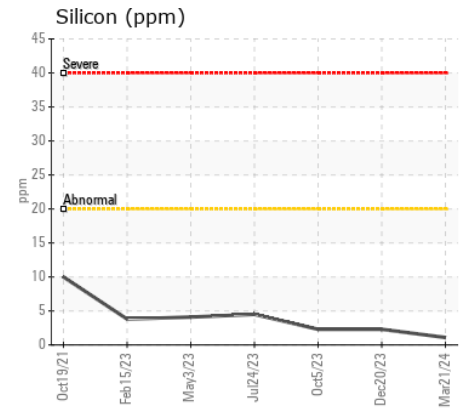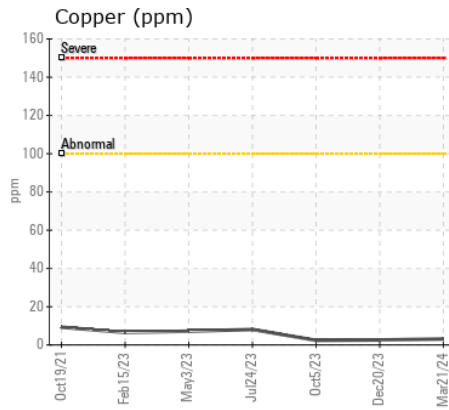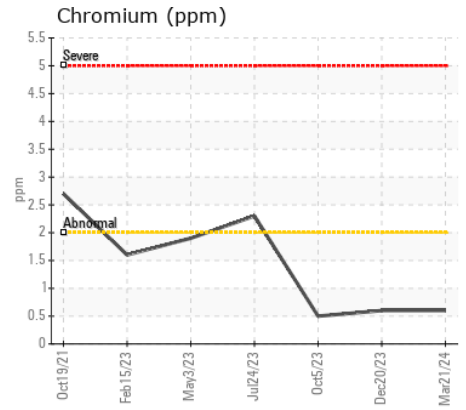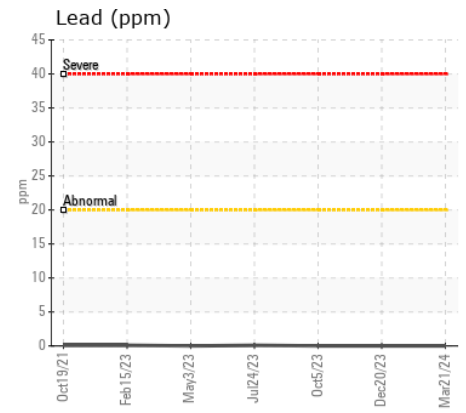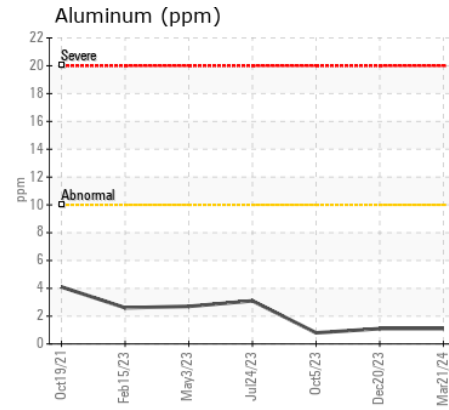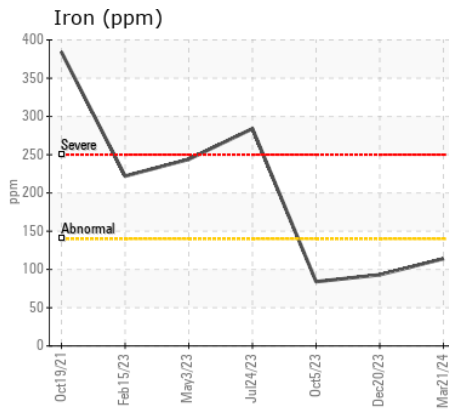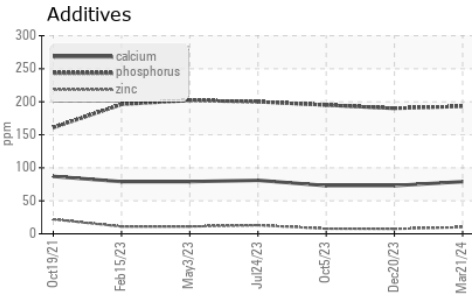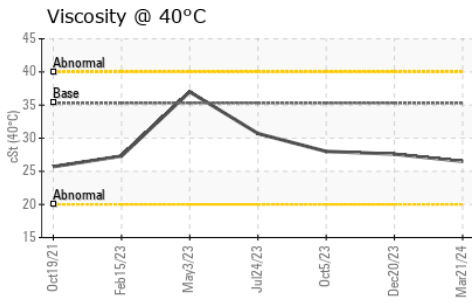

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP449349
Lab Number : 02632353
Unique Number : 5773506
Test Package : MOB 1
Received : 30 Apr 2024
Tested : 30 Apr 2024
Diagnosed : 30 Apr 2024 - Wes Davis

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Dan Brown
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: